



ICF TECHNOLOGY INCORPORATED

TO Ed Sierra, EPA Region VI, RPO
THRU K H Malone Jr, FITOM *adm*
THRU Tim A Hall, AFITOM *for TAH*
FROM Pam Fetzter FIT Geologist *P Fetzter*
DATE May 3, 1989
SUBJ Preliminary Assessment Under the Environmental Priorities Initiative
Program Regarding Houston Lighting and Power Webster Generating /
Plant CERCLIS # TXD000837369 TDD # F 6-8902-25 PAN FTX0807PAA

SUPERFUND
FILE

AUG 21 1992

REORGANIZED

SITE INFORMATION

X REF IN SA Vol 1

The Houston Lighting and Power Webster Generating Plant is located at 19301 State Highway 3 in Webster Texas one mile south of NASA Highway 1 (Mailing address P O Box 1700 Houston, Texas 77001) The latitude and longitude are 29°31'47" N and 95°06'10" W respectively (Figure 1) The facility encompasses 607 acres and is publicly owned by Houston Industries

The purpose of this investigation is to perform a Preliminary Assessment (PA) under the Environmental Priorities Initiative (EPI) Program for the EPA The FIT was also tasked to determine the net worth and sales value of the company

BACKGROUND/OPERATING HISTORY

The Webster Generating Plant began operating the first gas turbine electric generating unit in 1954 In 1965 the third (final) turbine went on-line and is currently operating (Figure 2)

The plant has the sole function of producing electricity by generating steam from a gas-operated turbine In the production process, water from ground water wells is heated in the boilers and is then cooled, condensed demineralized chemically treated and then discharged via the discharge canal After the effluent is routed through the surface impoundments to settle out the solids the water is pumped through the chemical treatment process for flocculation and binding of chromium, barium, arsenic selenium, lead mercury and cadmium By products such as phosphates nitrates, ammonia and citric acid are treated to produce an acceptable effluent discharge (5)

No specific contaminants of concern were found within the CERCLA, RCRA and the TWC files however EP Toxicity (EP TOX) analyses were conducted on 4 samples for arsenic barium chromium lead cadmium mercury, selenium and silver concentrations These will be considered the contaminants of concern (6, 11)

PRELIMINARY REPORT
This document is not a
final opinion of EPA

Reviewed by GH ES
Date 5/18/85
DWW

9490363



Contaminants discharged from the outfalls are aluminum sulfate, ammonia, chlorine sodium nitrate sodium phosphates and sodium hydroxide (23) These constituents have been generated during equipment cleanings Equipment cleanings are necessary to prevent corrosion and remove scale Other substances such as waste oils, spent solvents sandblasting grit, asbestos insulation, inorganic and organic sludge and paint thinner are generated on the site

The Texas Department of Water Resources (TDWR) analytical data concern the classification of waste On April 8 1981 EP TOX analyses were performed on several samples collected at the site The results of these tests indicated that the waste materials from the demineralizer regenerant sludge, metal cleaning inorganic sludge, and organic acids collection pond sludge (11, pg 1) were Class II wastes (TWC 241470)

The Analytical Petroleum Research (APR) Laboratories analyzed a sample of a waste oil floor drain sump and gas turbine oil trap through EP TOX analysis on September 25, 1984 Arsenic barium cadmium, chromium, lead, mercury, selenium and silver were below detection limits No analytical methods were included in the report (11)

During the July 1, 1986 closure inspection samples were taken from the demineralizer regenerant/boiler blowdown surface impoundment The composite soil samples, taken from 18 inches and 2 to 4 inches from the surface were analyzed by the TDWR for EP TOX metals The analyses revealed barium at 326 to 390 μ /l (6) Ground water monitoring well samples revealed high conductivity levels for MW 1, which is located near the discharge canal The ground water from the monitoring wells was tested for pH by EPA method 150 1 (5) The April 24, 1987 sampling of MW-1 and MW 2 for the Comprehensive Ground water Monitoring Evaluation (CME) yielded the following results (see Page 3 of this report)

Analyses of monitoring well samples were collected on April 24, 1987 for the CME The analytical methods used to determine the conductivity and pH of chloride, sulfate iron, manganese sodium phenol, and total organic carbon were from EPA 600/4-79-020 "Methods for Chemical Analysis of Water and Wastes" (March 1979) 120 1 150 1 325 3, 375 4 236 1, 243 1, 273 1 420 1, and 415 1 respectively Total organic halogen analysis is tested by the EPA Interim Method, 1980 "Interim Method for Total Organic Halide" 450 1 These analyses are used by Analytical Petroleum Research Laboratories Inc, Dickinson, Texas for the Webster Plant No QA/QC documentation was found, nor is there any indication that duplicate samples were collected

None of the sampling data found in the files revealed significant contamination from the impoundment sludge or water or the waste oil drain, with the exception of the values derived from the CME sampling results The validity of the sampling data is questionable because there are no QA/QC, duplicates and background samples (5) Higher values of magnesium, iron zinc and manganese were found for MW-1, as compared to MW-2 (26)

MW-1 (4-24-87) BY HOUSTON POWER & LIGHT*

Note Results revealed high conductivity headings between MW 1 and MW-2 when comparing 1984 and 1987

Parameters	MW-1 (mg/l)		MW 2 (mg/l)	
	1984 Assessment	TWC-1987 CME	1984 Assessment	TWC-1987 CME
Magnesium	270	246	34	42
Chloride	3,900	4 463	220	352
Iron	0 25	74 6	< 0 05	3 71
Zinc	1 6	0 15	0 05	< 0 02
Conductivity	12,000	17,000	1 600	3,190

*(26 Attachment S)

APR LAB RESULTS OF SAMPLES COLLECTED FROM
MW-1 AND MW-2 (4-27-87)**

Parameters	MW 1 (mg/l)	MW-2 (mg/l)
Magnesium	263	42 1
Total dissolved solids	11,546	1,400
Manganese	0 8	< 0 1

** (26, Attachment T)

TWC LAB RESULTS OF SAMPLES COLLECTED FROM*
MW-1 AND MW-2 (4-27-87)**

Parameters	MW-1 (mg/l)	MW-2 (mg/l)
Magnesium	246	42
Chloride	559	69
Iron	74 6	3 71
Manganese	0 850	0 043
Zinc	0 150	0 020

*** (26 Attachment V)

An off-site reconnaissance inspection was not performed because the impoundments have undergone closure and neither the facility nor the impoundments can be seen from the public road

The plant was issued a Texas Solid Waste Disposal Act Permit (August 15, 1980), Texas Department of Water Resources Solid Waste Registration Permit (No 31633), a Wastewater Disposal Permit (under Texas Water Code 01044), a Hazardous Waste Management Program Permit (from the EPA on August 18, 1980), and an NPDES Permit (No TX0006532 from the EPA) (13)

Information about the facility was found from the CERCLA, RCRA and the TWC files. Other related information was obtained from various state and Federal agencies.

During a TWC inspection, it was noted in the plant manifest that approximately 150 cubic yards of soil contaminated by sodium hydroxide were removed from the site. According to plant personnel, a caustic line ruptured, spilling 1 000 pounds of sodium hydroxide (7). No other facts are known about the incident. No known emergency or remedial action was taken by the EPA or related agencies.

The book assets for Houston Lighting and Power total \$10 billion. The value of the plant has fully depreciated (19). The sales of the Company in 1987 totalled \$3 billion (14). The net value of the company has been determined (19).

UNIT DESCRIPTION/WASTE CONTAINMENT/HAZARDOUS SUBSTANCE IDENTIFICATION

Used water from the boiler is pumped into a clay lined pond to collect and equalize the demineralizer regenerant wastes prior to wastewater treatment. The water from the demineralizer regenerant/boiler blowdown surface impoundment and the inorganic metal cleaning surface impoundment is pumped into a concrete chemical waste treatment system which is used to treat the water prior to NPDES discharge. The water is pumped into the 300 gallon mixing chamber where the solids settle, and then is pumped into a flocculation chamber, where a flocculent is added. The type of flocculent used could not be determined. The liquid then enters the settling chamber where the solids settle and is neutralized in the pH readjustment chamber. The effluent is discharged in accordance with the NPDES permit. The sludge that accumulates in the settling chamber is pumped to the sand drying beds for dewatering and periodic off-site removal (11).

SWMU IDENTIFICATION

Eight Solid Waste Management Units (SWMUs) have been identified at the Webster Generating Plant. Although RCRA regulation status was not found in the files, all of the SWMUs are RCRA-regulated based on CFR 264.90, subsection F.

SWMU #1 Demineralizer Regenerant/Boiler Blowdown Surface Impoundment

The impoundment, located south of SWMU #2, is 200 feet long by 130 feet wide by 5 feet deep. Since 1970, it has been used as a holding pond for recycled water from the demineralizer regenerant and boiler.

blowdown The 3 foot clay lined unit has the capacity of 372,000 gallons The annual volume of waste received by the impoundment was reportedly 79 300,000 gallons in 1984, but the total volume of waste received has not been determined Sludge is removed periodically for off-site disposal and is classified as a Class II (non-hazardous) waste (TWC 241470) The files did not contain information about other contaminants present Certification of closure was submitted September 2 1986 (5), but in the Comprehensive Ground Water Monitoring Evaluation Report (CME) the unit is referred to as closed According to the closure plan, all of the sludge and the first foot of the clay liner was to be removed, drummed and shipped off-site for disposal (8) It is not known whether the sludge and clay were removed and the material analyzed Subsurface migration is considered unlikely because the permeability of the clay soil is 5.6×10^{-9} cm/sec (12) Results of borehole sampling revealed that the clay extended to a depth of 20 feet below the ground surface (12) The amount of freeboard and the diking condition are not known, so the likelihood of overflowing is undetermined Should the impoundment overflow, the drainage pathway would be into Clear Creek approximately 1,000 feet east of the unit (2)

SWMU #2 Inorganic Metal Cleaning Surface Impoundment

This SWMU is located on the north side of the demineralizer regenerant surface impoundment It is 200 feet long by 135 feet wide by 4 25 feet deep It has been active since 1977 This unit received spent acids from metal cleaning operations The wastewater is pumped to a concrete wastewater treatment system where it is treated and discharged under an NPDES permit (9) The total volume of waste received is not known but it has been determined that in 1980, 18,287,000 pounds were received Sludge from the bottom of the pond is periodically removed for off-site disposal and is classified as a Class II waste (TWC 241210)(11) The impoundment is lined with 3 feet of compacted clay The amount of freeboard and the condition of the diking structure are not known No report of overflowing was found in the files If the impoundment dikes are breached, the drainage pathway would be to the east toward Clear Creek Results of borehole sampling revealed that the permeability was 2.2×10^{-9} cm/sec (12) Subsurface migration is unlikely The impoundment was closed and submitted for certification on November 4, 1985 In the CME, the unit is referred to as closed Construction of a concrete tank at the impoundment is proposed

SWMU #3 Organic Acid Waste Pond

Located south and adjacent to the demineralizer regenerant surface impoundment, is the organic acid waste pond This clay lined active unit is used to store ammoniated citric acid effluent generated from boiler and equipment cleanings (11) The unit has been in operation since 1977 It has a 270,000 gallon capacity The total amount of

waste received is not known, but it has been determined that in 1980 2,752 500 pounds of waste were received (13) The TWDR declassified the waste to a Class II waste (TWC 215290) due to EP TOX test results (11) The condition and current status of this unit are not known Should the impoundment overflow or the dike be breached the drainage pathway would be to the east toward Clear Creek or to the north toward a drainage ditch that is parallel to the discharge canal

SWMU #4 Sludge Drying Beds

This clay lined unit is located south of the organic acid waste pond Each bed has a 1,790 gallon capacity (13) The total waste volume, dimensions, and documentation of the unit have not been determined Sludge from the settling chamber of the chemical waste treatment system and the oily waste treatment system is pumped to the drying beds for dewatering The dried sludge is periodically drummed and shipped off-site for disposal (11) The sludge is classified as a Class II waste (TWC 204540) Should the unit overflow it is possible that the material could enter Clear Creek from the west (10)

SWMU #5 Hazardous Waste Container Storage Area

This unit is located adjacent to the waste oil tank east of the gas turbine building (7) Active since 1980, it is used to store 55-gallon drums of liquid and solid hazardous and non-hazardous wastes, including refractory brick, spent solvents paint thinner waste oils and sandblasting grit The drums are stored temporarily, prior to off-site disposal All containers in storage were disposed by Rollins (location undetermined) and the resulting cleaning materials and contaminated equipment were disposed at BFI (location undetermined) as Class II waste The number of drums used is not known Houston Lighting and Power submitted a closure plan on May 13, 1985 but plans to open the area as a less than 90-day storage facility (8, pg 3) At the present time it is not known if the facility has been opened The July 14, 1986 inspection revealed a 500-gallon tank half full of waste oil and two empty 55 gallon drums One of the drums was labeled "waste solvent " The waste oil and spent solvent are collected by a recycling firm In 1980, 9,700 pounds of waste oil and spent solvent were generated, by 1984, none was generated The sandblasting grit is stored in bins prior to off-site disposal The unit has a concrete floor No other protective containment device was noted during the inspection The condition of the drums was not noted during the inspection

SWMU #6 Chemical Waste Treatment System

Active since 1977, the unit is used to treat demineralizer regenerant inorganic metal cleaning waste and boiler blowdown prior

to the NPDES discharge Located north of the intake water canal and northwest across the plant road from the inorganic pond, the unit consists of the mixing chamber (300 gallon) flocculation chamber (1 100 gallon) settling chamber (6,900 gallon) and pH adjustment chamber, (300 gallon) The Hazardous Waste Components List describes the unit as a surface processing tank but the type of tank is not known (13) 8 600 gallons were generated from this unit in 1980 (11 pg 2) The files did not contain information about containment structures or drainage pathways

SWMU #7 Waste Oil and Sludge Collection Facility

Oily sludge from the oily waste treatment system is classified as either a Class I (nonhazardous) or Class II waste No other information (quantity age location, pathways) about this unit was available (11, pg 3)

SWMU #8 Asbestos in Insulation

The original location of the asbestos insulation is not known In 1980, 3 600 pounds of asbestos were placed in bags and then wet before being removed off-site (13, pg 14) The waste was classified as a Class I nonhazardous waste (TWC 170750) (11) The plant map shows that the asbestos is stored in an implement shed north of and adjacent to, the warehouse It is not known if more asbestos insulation is present

PATHWAY CHARACTERISTICS

Air Pathway Characteristics

No information about air pathway characteristics was available The contaminants of concern are primarily heavy metals in the form of liquids and sludges Migration into the air pathway is unlikely

Ground Water Characteristics

The plant is located in the Gulf Coastal Plain on the Beaumont Formation The lithology of the subsurface consists mainly of deltaic clays and silts grading to the south towards the Gulf of Mexico The Beaumont Formation is part of a larger stratigraphic unit known as the Chicot Formation The formation is approximately 700 feet thick and forms the uppermost aquifer under the site It is used as a drinking water source for this area

In the Webster area, the formation is differentiated into the Upper and Lower Chicot with the Alta Loma Sand member (approximately 120 feet thick) as being the main water bearing sand of the Lower Chicot

The Upper and Lower Chicot Sands are interconnected hydrologically. The upper unit is tight because of the higher clay to sand ratio. The plant and the surrounding area pump predominantly from the Alta Loma Sand. Ground water flow direction regionally is to the south, but due to the heavy usage from the Houston area, the ground water flow is to the northwest. The generating plant has two on-site wells with total depths of 636 feet and 664 feet. They are screened in the Lower Chicot aquifer (17). The company well has a 20 foot sand bed at 100 feet and a 120 foot sand bed at 500 feet. The material between these layers is predominantly clay and silty clay. The 500 foot sand bed is the Alta Loma Member.

The formation stratigraphically below the Chicot Sand is the Evangeline Formation. Although it is also a water bearing unit, the encroachment of salt water is increasing so most wells are screened in the Alta Loma Sand unit.

Four monitoring wells are located around the impoundments at the site. The stratigraphy from the borings around the surface impoundments revealed a deltaic lithology. The stratigraphy beneath the impoundments is undefined 30 feet below the ground surface. A 15 foot sand is located 40 feet beneath the impoundments. A 15 foot silty clay layer, overlying a sandy clay, is located 60 to 80 feet beneath the impoundments. The static water level recorded in the monitoring wells is located 6 to 14 feet below the ground surface level (5). Water levels from the monitoring wells revealed that MW-1 is influenced by the cooling water discharge canal. MW-1 is located approximately 100 feet south of the canal, which has a water elevation of 12.82 feet. The canal may act as a recharge feature since the water elevation for MW-1 is 10.53 feet (5, pg. 9).

The net precipitation for the plant area is -2 inches (1).

Surface Water Characteristics

The local topography is flat, with a slight general slope to the south southeast. The plant is located approximately 1,000 feet from Clear Creek. The intake and discharge canals are located approximately 100 to 200 feet from the surface impoundments. The surface water runoff from the ponds would flow south into Clear Creek (2). The discharge canal flows approximately 3 miles into a sewage disposal plant then and into Clear Lake, which flows into Galveston Bay. Both are used for recreational purposes. Galveston Bay is also used for commercial fishing (22). The site is located in the San Jacinto River Basin (2).

No intakes are located on these surface water bodies because they are subject to tidal surges (15). The annual stream flow and upgradient drainage area estimates are not known.

Located in a 100 year floodplain, the site area receives a two year, 24 hour average rainfall of 5 inches. Flooding of the facility is unlikely because the

elevation difference between the site and the banks of Clear Creek is approximately 20 feet (2)

On-Site Pathway Characteristics

The facility is active, with both controlled access and a fence surrounding the property. The number of employees present on site and the number of employees coming into direct contact with the waste process are not known. Data suggest that the waste treatment process is a closed system in which contents are pumped from one SWMU to another without being handled by employees. The sandblasting grit is in an open bin and the surface impoundments are also open. It has not been determined how the solvents, waste oils, paint thinner and sludges are drummed and removed.

TARGETS

According to the Galveston County Health Department, private drinking water wells are used, but the exact number and location of the wells is not known. Most of southeast Harris County and Galveston County use 90% to 97% surface water from Lake Houston. The remaining 3% to 10% is mixed with ground water from public supply wells (17). Irrigation well data are available, but it is not known how many of the wells are currently used for this purpose (20). According to the CME, there are 152 water wells in a 2.5 mile radius of the site. This includes 60 domestic wells, 26 public wells, 25 undocumented wells, 19 wells no longer in use, 13 industrial wells, 3 observation wells, 1 livestock well and 1 service station well. The wells range from 84 to 700 feet deep and are screened in either the Upper Chicot or the Lower Chicot Aquifer (5).

The surface water (Clear Lake) is used as contact recreation for boating, swimming and fishing. On the bay, fishing is a commercial enterprise (22).

There are no data supporting an air target or on-site target. The population within one mile is estimated at 800 (2).

CONCLUSIONS

The function of the plant is to produce electricity. The waste process is generated through the boiling and subsequent cooling of water used in the generation of steam.

The SWMUs are the receptacles for the process water pathway. The eight identified SWMUs include 3 surface impoundments, 1 set of drying beds, the chemical waste treatment system, the waste oil and sludge collection facility, the hazardous waste container storage area and the asbestos in insulation. The original location of the asbestos and the manner in which it was removed have not been determined.

The sampling results found in the 1987 CME show significant contamination of the ground water from MW-1 as compared to MW-2. MW-1 could be affected by the

discharge canal 100 feet north. Elevated levels of manganese, magnesium, iron and zinc were reported. Robert Hahn, Inspector for the TWC, noted that the possibility of acid leaching metals from the soil around the surface impoundments was possible because the background soil analysis showed a higher concentration of arsenic, mercury and chromium than the soil around the impoundments. Sample analyses of other on-site areas show no significant contamination.

The state has certified a clean closure for the demineralizer regenerant surface impoundment and the inorganic metal cleaning surface impoundment. An affidavit of exclusion was granted on August 17, 1987. Clean closure requires the removal of residues but does not require the plant to fill and cap the impoundments. It is not known whether post closure sampling has taken place.

The financial status of Houston Lighting and Power appears to be sound. The sales of the company totalled \$3 billion. The net value of the company has not been determined.

The results from the monitoring well installation showed clay to a depth of 20 feet. The contaminants present are metals, which will not migrate quickly through clay (5).

The primary pathway of concern is ground water because the surface water used for public supply is upgradient from the site. The ground water is used to supplement the public water supply. The Alta Loma Sand Member of the Lower Chicot Aquifer is the source of the local ground water. The Lower and Upper Chicot are interconnected and the Upper Chicot outcrops on the land surface. The Upper Chicot is composed of deltaic silts, sands and clays which retard vertical migration in the Upper member. No known wells are screened in the Upper Chicot.

The static water levels in the monitoring wells ranged from 6 to 14 feet from the surface, but the levels in one of the company wells and in a City of Webster well in 1971 were 200 and 207 feet, respectively. Both static water levels have dropped since the 1950s (21). Although the aquifer is interconnected, the water bearing zone is approximately 500 to 600 feet below the land surface and horizontal migration is calculated to be approximately 6 feet per year. The exact rate of vertical migration could not be determined, but it is probable that migration is slow since the plant is located on the Beaumont Formation which has a high clay content (5). Although the site specific ground water movement is not known, the evidence indicates the discharge canal influences the background MW 1 based on high conductivity readings at both locations.

PA DOCUMENTATION LOG SHEET

SITE NAME Houston Lighting & Power - Webster
CITY Webster STATE Texas
IDENTIFICATION NUMBER TXD000837369

Reference
Number

Description of the Reference


- 1 U S EPA Uncontrolled Hazardous Waste Site Ranking System
A Users Manual 47FR31219-31263 July 16, 1982,
(Appendix A, CERCLA)
- 2 U S G S 7 5 minute series Topographic map League City,
TX 1982
- 3 Sax, N Irving 1984 Dangerous Properties of Industrial
Materials Sixth Edition Van Nostrand Reinhold Company
- 4 Hershfield, David M Rainfall Frequency Atlas of the United
States U S Department of Agriculture Soil Conservation
Service Technical Paper No 40 1961
- 5 Hahn, Robert, Texas Water Commission Inspector
Comprehensive Ground Water Monitoring Evaluation (CME)
Report, TWC Reg No 31633, June 5, 1987
- 6 Thetford, Paula, Texas Water Commission Hazardous and Solid
Waste Specialist Solid Waste Compliance Monitoring
Inspection Report, TWC Reg No 31633, October 21, 1986
- 7 Thetford, Paula, Texas Water Commission Hazardous and Solid
Waste Specialist Solid Waste Compliance Monitoring
Inspection Report, TWC Reg No 31633, July 14, 1986
- 8 Bleam, Karen, Texas Water Commission Hazardous and Solid
Waste Specialist Solid Waste Compliance Monitoring
Inspection Report, TWC Reg No 31633, December 12, 1985
- 9 Letter To William N Rhea, Hazardous Waste Management
Division, EPA Region VI From W F McGuire, Manager,
Environmental Protection Department, Houston Lighting and
Power Re RCRA Section 3007 Information Request November
8, 1985
- 10 Letter To Jay Snow, P E , Chief, Solid Waste Section Texas
Department of Water Resources From W F McGuire, Manager,
Environmental Protection Department, Houston Lighting and
Power Re Supplement to Closure Plan for Hazardous Waste
Surface Impoundments May 6, 1985

PA DOCUMENTATION LOG SHEET	SITE NAME Houston Lighting & Power - Webster CITY Webster STATE Texas IDENTIFICATION NUMBER TXD000837369
Reference Number	Description of the Reference
11	Letter To Ray Henry Austin, P E , Storage and Processing Facilities Unit, Texas Water Commission From W F McGuire, Manager, Environmental Protection Department, Houston Lighting and Power Re Revised Part A Application February 8, 1985
12	Letter To James R Mertink, Houston Lighting and Power Company From Edward J Ulrich, Jr , P E , Engineer Manager, McClelland Engineers, Inc Re Geotechnical Investigation Class I Disposal Ponds November 16, 1981
13	Part A - Permit Application Facility Background Information for Houston Lighting and Power, Webster Generating Station August 18, 1980
14	Standard and Poor's Corporation, Register of Corporations, Directors and Executives, Vol I 1989
15	ROC To Mr Sewers, Houston Water Authority From Pam Fetzer, FIT Geologist, EPA Region VI Re Intake Locations for Lake Houston March 14, 1989
16	ROC To Mr Will Moberly, Clear Lake Water Authority From Pam Fetzer, FIT Geologist, EPA Region VI Re Public Water Source for Clear Lake City March 13, 1989
17	ROC To Ernest Baker, Hydrologist, U S G S From Pam Fetzer, FIT Geologist, EPA Region VI Re Hydrogeology of the Southeast Houston area March 14, 1989
18	ROC To Joe Castleberry, Analyst, Texas Public Utilities Commission From Pam Fetzer, FIT Geologist, EPA Region VI Re Financial History of the Webster Generating Plant March 7, 1989
19	ROC To Dan Bulla, Shareholder Relations, Houston Industries From Pam Fetzer, FIT Geologist, EPA Region VI Re Value of the Webster Generating Plant March 7, 1989

PA DOCUMENTATION LOG SHEET

SITE NAME Houston Lighting & Power - Webster
CITY Webster STATE Texas
IDENTIFICATION NUMBER TXD000837369

Reference Number	Description of the Reference
20	ROC To Janet Greenwood, Supervisor, Galveston County Health Department From Pam Fetzer, FIT Geologist, EPA Region VI Re Privately Owned Ground Water Wells March 14, 1989
21	Texas Water Development Board, Ground-Water Data for Harris County, Texas, Volume II, Records of Wells, 1892-1972, Report 178 pp 172, 173 January 1974
22	ROC To Henry Fleming, Engineer, Corps of Engineers From Pam Fetzer, FIT Geologist, EPA Region VI Re Surface Water Use In Southeast Houston Area, March 14, 1989
23	Application for Permit to Discharge Waste Water Form 2C NPDES U S EPA Region VI April 14, 1987
24	ROC To Gene Keepper, Biologist, U S EPA, Region VI From Pam Fetzer, FIT Geologist, EPA Region VI Re Wetlands in the Southeast Houston Area March 23, 1989
25	Hahn, Robert, Texas Water Commission Inspector Comprehensive Ground Water Monitoring Evaluation (CME) Report, TWC Reg No 31633, September 16, 1987

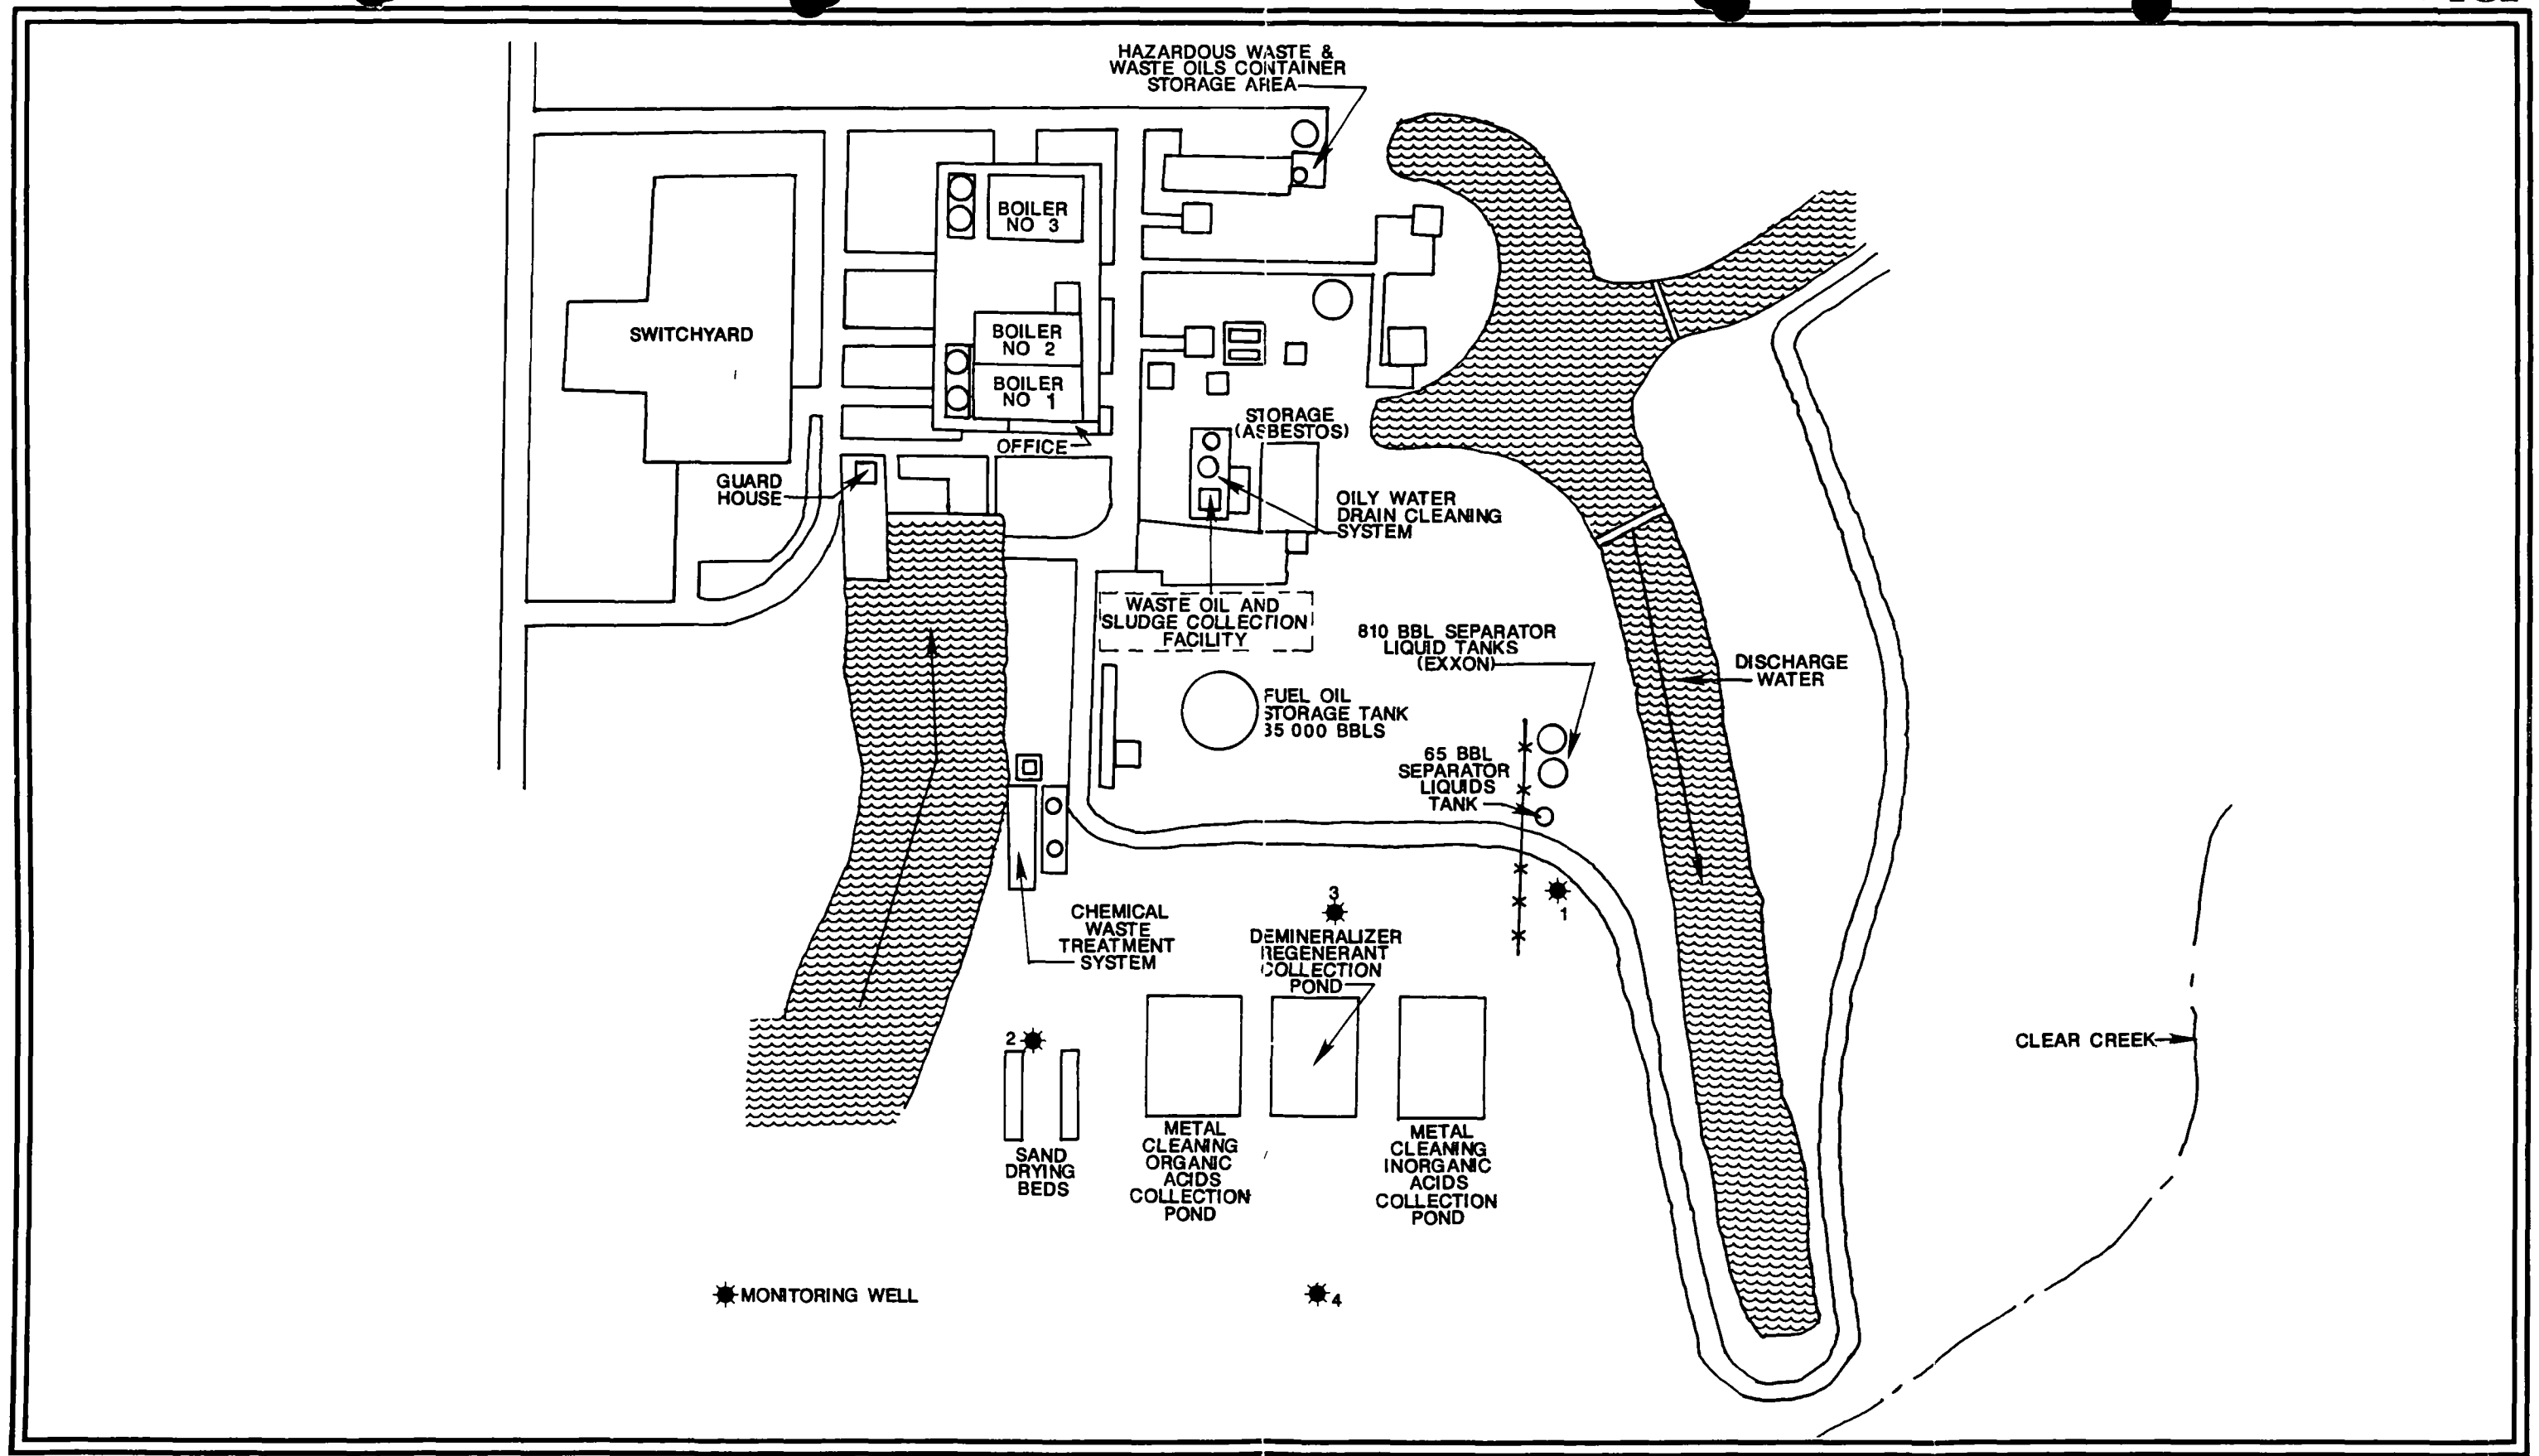



Uncontrolled Hazardous Waste Site Ranking System

A Users Manual (HW-10)

Originally Published in
the July 16, 1982 *Federal Register*

United States
Environmental Protection
Agency

1984

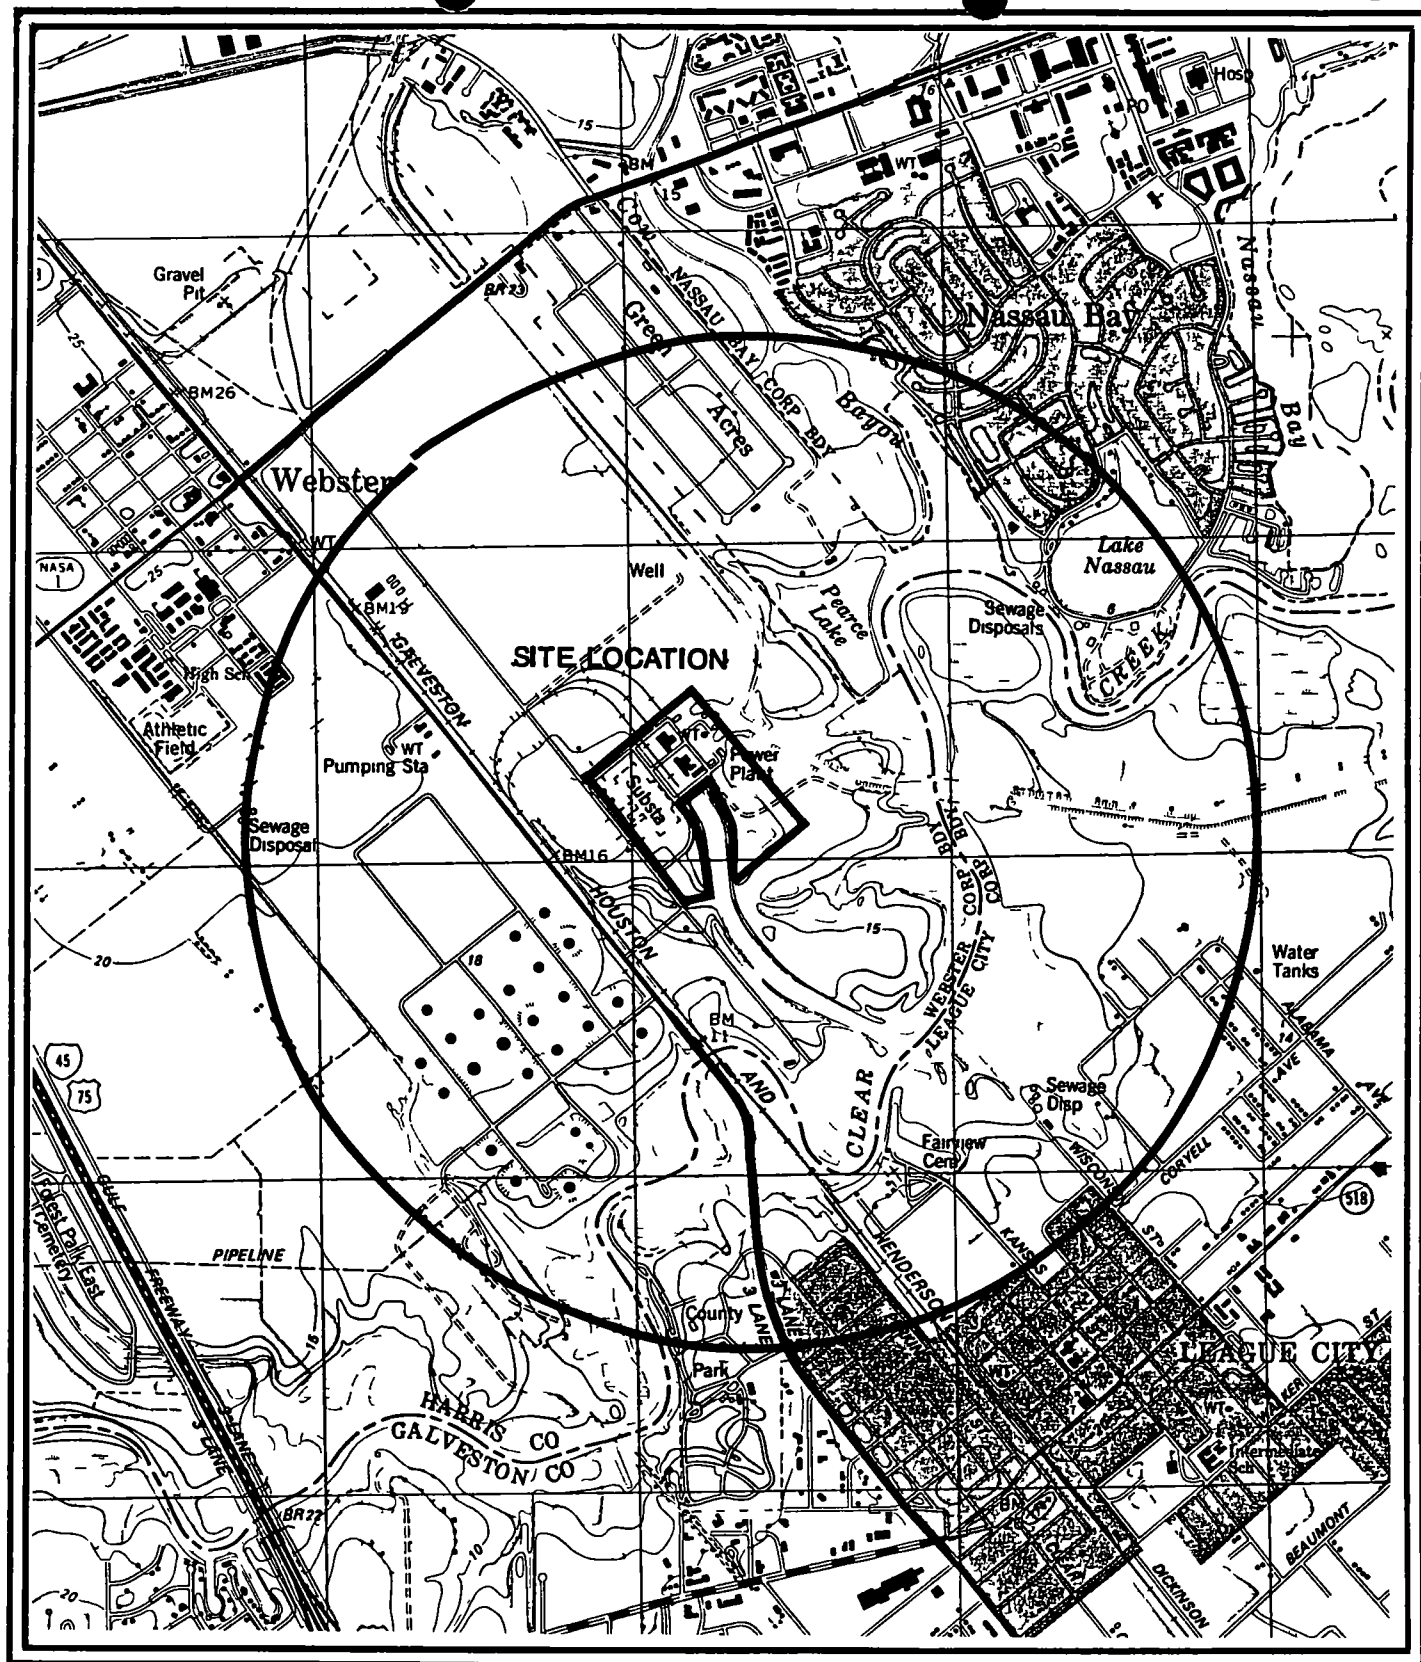

Site Location Map
HOUSTON LIGHTING & POWER
WEBSTER PLANT
 WEBSTER, TX
 TDD NO F-6-8902-25
 CERCLIS NO TXD000837369



REFERENCE 3

Dangerous Properties



Industrial Materials

Sixth Edition

 **N. Irving Sax** 

792 CHROMIUM OXYCHLORIDE

Carcinogenic Determination Animal Positive IARC**
23 205 80 Indefinite IARC** 2 100 73 *Toxicology Review* 85DHAX Cr 22 74 27ZTAP 3 38 69

Standards and Regulations OSHA Standard Air CL 100 ug(CrO₃)/m³ (SCP 0) FEREAC 39 23540 74 DOT Oxidizer Label Oxidizer FEREAC 41 47018 76 Occupational Exposure to Cr(VI) recm std Air TWA 25 ug(Cr(VI))/m³ CL 50 ug/m³/15M NTIS** Meets Criteria for Proposed OSHA Medical Records Rule FEREAC 47 30420 82

THR MUT data An exper TER CARC HIGH scu See also chromium compounds

Disaster Hazard Powerful oxidizer

Incomp Acetic acid acetic anhydride acetic anhydride + tetrahydronaphthalene acetone alcohols alkali metals ammonia, arsenic bromine pentafluoride butyric acid N N dimethylformamide hydrogen sulfide peroxyformic acid phosphorus potassium hexacyanoferrate pyridine selenium sodium sulfur

CHROMIUM OXYCHLORIDE

CAS RN 14977618 NIOSH # GB 5775000
mf Cl₂CrO₂ mw 154 90

Dark red liquid musty burning odor mp -96.5° bp 115.7° d 1.9145 @ 25°/4° vap press 20 mm @ 20°

SYNS

CHROMYL CHLORIDE
CHLORURE DE CHROMYLE
(FRENCH)

CHROMIC OXYCHLORIDE
CHROMIUM CHLORIDE OXIDE
CHROMIUM DICHLORIDE DIOXIDE
CHROMIUM DIOXIDE DICHLORIDE
CHROMIUM (VI) DIOXYCHLORIDE
CHROMYLCHLORID (GERMAN)

CHROMOXYLCHLORIDE (DUTCH)
CROMILE, CLORURO DI (ITALIAN)
CROMO OSSICLORURO DI (ITALIAN)

DICHLORODIOXOCHROMIUM
DIOXODICHLOROCHROMIUM
OXYCHLORURE CHROMIQUE
(FRENCH)

TOXICITY DATA 3 CODEN
mmo-sat 50 ug/plate CRNGDP 1 583 80
mma sat 100 ug/plate CRNGDP 1 583 80

Aquatic Toxicity Rating TLm96 under 1 ppm WQCHM* 2 74 TLV TWA 25 ppb DTLVS* 4 100,80 DOT Corrosive Material Label Corrosive FEREAC 41 57018 76 Occupational Exposure to Chromium (VI) recm std Air CL 1 ug (Cr(VI))/m³ NTIS** Reported in EPA TSCA Inventory 1980

THR HIGH via scu and inhl routes A strong irr Hydrolyzes to form chromic and hydrochloric acids See chromium compounds Reacts violently with alcohol ether acetone turpentine NH₃ (Cl₂ + C) F₂ P PCl₃ NaN₃ S SCI

Disaster Hazard Dangerous see chlorides

Incomp During preparation can violently explode Ammonia disulfur dichloride organic solvents phosphorus or phosphorus trichloride sodium azide sulfur

CHROMIUM(6+)

ZINC OXIDE HYDRATE (1 2 6 1)

CAS RN 15930946 NIOSH # GB 3260000
mf CrO₄ H₂O₂ Zn₂ H₂O mw 298 78

SYNS

BUTTERCUP YELLOW
ZINC CHROMATE HYDROXIDE
ZINC CHROMATE (VI) HYDROXIDE

ZINC HYDROXYCHROMATE
ZINC YELLOW

TOXICITY DATA 3 CODEN

Carcinogenic Determination Animal Positive IARC**
2 100 73 Human Positive IARC** 23 205,80 *Toxicology Review* PEXTAR 12 102 69 85DHAX Cr 22,74 AMTODM 3 209 77 Occupational Exposure to Chromium (VI) recm std Air CL 1 ug(Cr(VI))/m³ NTIS**

THR A hmn + CARC An exper CARC See also chromium and zinc compounds

CHROMOMYCIN SODIUM

NIOSH # RK 4385300

Produced by a strain of Actinomyces Olivoreticuli (85ERAY 2 1322 78)

SYN OLIVOMYCIN SODIUM SALT

TOXICITY DATA 3 CODEN
ipr rat LDLo 1 mg/kg ANTBAL 7 53 62
ivn rat LDLo 1 mg/kg ANTBAL 7 53 62
orl mus LDLo 250 mg/kg ANTBAL 7 53 62
ipr mus LD50 12700 ug/kg ANTBAL 7 53 62
scu mus LD50 15600 ug/kg ANTBAL 7 53 62
ivn mus LD50 138 mg/kg 85ERAY 2 1322,78
ivn-dog LDLo 300 ug/kg ANTBAL 7 53 62
ivn rbt LDLo 2500 ug/kg ANTBAL 7 53 62
ipr gpg LDLo 2 mg/kg ANTBAL 7 53 62

THR HIGH ipr ivn orl scu

Disaster Hazard When heated to decomp it emits acrid smoke and irr fumes

CHROMYL AZIDE CHLORIDE

mf ClCrN₃O₂ mw 161 47

Explosive

CHROMYL ISOCYANATE

mf C₂CrN₂O₄ mw 168 03

Weak explosion of salt when evaporated with heat atmospheric pressure

CHROMYL PERCHLORATE

mf Cl₂CrO₁₀ mw 282 90

Incomp Self-explodes or organic solvents

CI 45405

CAS RN 6441776 NIOSH # LM 5820000
mf C₂₀H₆Br₄Cl₂O₅ 2K mw 794 93

SYNS

CI ACID RED 98
PHLOXINE

TOYO ACID PHLOXINE

TOXICITY DATA
mmo-esc 15 mg/L

CODEN
MUREAV 16 165 72

ipr rbt LD50 250 mg/kg
scu rbt LDLo 500 mg/kg
ivn rbt LDLo 400 mg/kg

JPETAB 42 253 31
JPETAB 49 187 33
JPETAB 60 125 37

THR MOD by ingestion Large doses cause marked depression (sometimes preceded by excitation) prolonged coma and death Allergic skin reactions may occur from contact Has been implicated in development of aplastic anemia A truly habit forming drug An exper TER in mus MUT data

Fire Hazard Slight when heated

Disaster Hazard When heated to decomp it emits tox fumes of NO₂

BARBITURATES

SYNS

DERIVATIVES OF BARBITURIC
ACID 1 E
BARBITAL

BARBITONE
BARBITAL SODIUM

THR MOD by ingestion Large doses cause marked depression (sometimes preceded by excitation) prolonged coma and death Allergic skin reactions may occur from contact Has been implicated in development of aplastic anemia A truly habit forming drug

Fire Hazard Slight when heated

BARBITURIC ACID

mf C₄H₄O₃N₂ mw 128.1

Crystals or white to yellow white powder mp 245° bp 260° (decomp)

THR MOD irr to skin eyes and mu mem An allergen Has no hypnotic properties

Fire Hazard Slight

BARBITURIC ACID, 5,5 DIETHYL MIXED WITH 4-(DIMETHYLAMINO)ANTIPYRINE

CAS RN 69401338

NIOSH # CD 2630000

SYN PYRABITAL

TOXICITY DATA 3
scu mus TDLo 600 mg/kg (9 11D
preg)

CODEN
TJADAB 16 118 77

THR An exper TER

Disaster Hazard When heated to decomp it emits tox fumes of NO₂

BARIUM

CAS RN 7440393

NIOSH # CA 8370000

af Ba at wt 137.36

Silver white slightly lustrous somewhat malleable metal mp 725° bp 1640° d 3.5 @ 20° vap press 10 mm @ 1049°

TOXICITY DATA

CODEN

TLV Air 500 ug/m³ DTLVS* 4 35 80 Reported in EPA TSCA Inventory 1980

THR No data See also barium compounds

Fire Hazard Dangerous and explosive in form of dust when exposed to heat or flame or by chemical reaction

Incomp Acids CCl₄ C₂Cl₃F₃ C₂H₂FCl₃ C₂Cl₄ C₂HCl₃ and water 1 1 2 trichloro trifluoro ethane fluorotri chloroethane fluorotrichloromethane trichloroethyl ene can detonate in contact with Ba

For further information see Vol 1 No 7 and Vol 3 No 4 of *DPIM Report*

BARIUM ACETATE

CAS RN 543806

NIOSH # AF 4550000

mf C₄H₆O₄ Ba mw 255.44

White cryst Water sol

SYNS

ACETIC ACID BARIUM SALT
BARIUM DIACETATE

OCTAN BARNATY (CZECH)

TOXICITY DATA

3 2

CODEN

ori rat LD50 921 mg/kg
ivn mus LD50 11 mg/kg
scu rbt LDLo 96 mg/kg
ivn rbt LDLo 12 mg/kg

MarJV# 29MAR77
TXAPA9 22 150 72
EQSSDX 1 1 75
EQSSDX 1 1 75

OSHA Standard Air TWA 500 ppm (SCP X) FEREAC 39 23540 74 Reported in EPA TSCA Inventory 1980

THR HIGH ivn scu MOD ori

Disaster Hazard When heated to decomp it emits acid smoke

BARIUM ACETYLIDE

mf C₂Ba, mw 161.35

Incomp Halogens selenium

BARIUM AZIDE

CAS RN 18810587

NIOSH # CQ 8500000

mf BaN₆ mw 221.40

Monoclinic prisms mp -N₂ @ about 120° bp explodes d 2 936

TOXICITY DATA

3

CODEN

Aquatic Toxicity Rating TLm96 100-10 ppm WQCHM* 2 74 Reported in EPA TSCA Inventory 1980

THR See barium compounds (sol) and azides

Explosion Hazard Mod when shocked or exposed to heat

Around 275° spont flammable in air Very unstable

Disaster Hazard Dangerous shock and heat will explode it

BARIUM AZIDE (WET)

CAS RN 18810587

NIOSH # CQ 8510000

Compound contains 50% or more water (FEREAC 41 15972 76)

TOXICITY DATA

3

CODEN

DOT Flammable Solid Label Flammable Solid FER EAC 41 57018 76 Reported in EPA TSCA Inventory 1980

THR HIGH tox See also barium compounds and azides

Disaster Hazard Possibly explosive

610 CADMIUM

TOXICITY DATA

Currently tested by NTP for carcinogenesis by standard bioassay protocol as of December 1980

THR No data Under CARC test

Disaster Hazard When heated to decomp it emits acrid smoke and fumes

CADMIUM

CAS RN 7440439

NIOSH # EU 9800000

mf Cd mw 112 40

Hexagonal crystals silver white malleable metal mp 320.9° bp 767 ± 2° d 8.642 vap press 1 mm @ 394°

SYNS

CI 77180

KADMIUM (GERMAN)

TOXICITY DATA

3

CODEN

ivn rat TDLo 1250 ug/kg/(9D

EVHPAZ 28 245 79

preg) TER

ipr mus TDLo 2248 ug/kg/(8D

TJADAB 13 33A 76

preg) TER

ivn ham TDLo 2 mg/kg/(8D

EXPEAM 25 56 69

preg) TER

ims-rat TDLo 45 mg/kg/4W I NEO

NCIUS* PH-43-64-886 SEPT 71

ims-rat TD 70 mg/kg ETA

BJCAAI 18 124 64

ims-rat TD 63 mg/kg ETA

NATUAS 193 592 62

ihl man TCLo 88 ug/m3/8 6Y SYS

AEHLAU 28 147 74

ihl hmn LCLo 39 mg/m3/20M

AIHAAP 31 180 70

unk man LDLo 15 mg/kg

85DCAI 2 73 70

orl rat LD50 225 mg/kg

TXAPA9 41 667 77

ipr rat LD50 4 mg/kg

TXAPA9 41 667 77

scu rat LD50 9 mg/kg

TXAPA9 41 667 77

ivn rat LD50 3 mg/kg

TXAPA9 41 667 77

unk rat LD50 712 mg/kg

GTPZAB 22(5) 6 78

unk mus LD50 636 mg/kg

GTPZAB 22(5) 6,78

orl rbt LDLo 70 mg/kg

AMPMAR 34 127 73

scu rbt LDLo 6 mg/kg

PROTA* 55

ims ham LDLo 25 mg/kg

NCIUS* PH-43-64-886

cyt ham ovr 1 umol/L

CGCGBR 26 251 80

ipr rat TDLo 1124 ug/kg (1D male)

TXAPA9 41 194 77

scu rat TDLo 250 ug/kg (19D preg)

APTOD9 19 A122,80

orl mus TDLo 448 mg/kg (MGN)

AEHLAU 23 102,71

Carcinogenic Determination Animal Positive IARC**
2 74 73

TLV Air 0.05 mg/m3 DTLVS* 4 59 80 TRBMAV
33(1) 85,75 JDSCAE 58(12) 1767 75 JFDSAZ
39 321 74 AMBOCX 3(2) 55 74, QURBAW 7(1),
75 74 AEMBAP 40 239 73 NTIS** PB 221 198
KOTTAM 11(11) 1300 75 FOREAE 7 313 42
STEVA8 2(4) 341 74 FCTXAV 9 105 71, AJMEAZ
38 409 65, ENVRAL 4 71,71 85CVA2 5 63 70, PEX
TAR 12 102 69 PDTNBH 6 204 77 BNYMAM
54 413 78 AMTODM 3 209 77 GSAMAQ 123
109 71 OSHA Standard Air TWA 200 ug/m3, CL
600 (SCP W) FERECAC 39 23540 74 Occupational Ex
posure to Cadmium recm std Air TWA 40 ug/m3
CL 200 ug/m3/15M NTIS** NIOSH Manual of
Analytical Methods VOL 1 191 223 224 VOL 3 S312
S313 VOL 5 173# Reported in EPA TSCA Inven
tory 1980

THR MUT data An exper TER NEO ETA CARC
A human SYS HIGH hmn ihl unk HIGH orl ipr

scu ivn ims MOD unk See also cadmium compounds
Fire Hazard Mod in the form of dust when exposed
to heat or flame or by chemical reaction with oxidizing
agents metals HN₃ Zn Se and Te

Explosion Hazard Mod in the form of dust when exposed
to flame

Disaster Hazard Dangerous cadmium dust can react
vigorously with oxidizing materials

For further information see Vol 1 No 1 and Vol 3,
No 5 of DPIM Report

CADMIUM (II) ACETATE

CAS RN 543908

NIOSH # EU 9810000

mf C₂H₄O₂ 1/2Cd mw 116 25

Monoclinic colorless crystals odor of acetic acid mp
256° bp decomp d 2 341

SYNS

BIS(ACETOXY)CADMIUM

CI 77185

CADMIUM DIACETATE

TOXICITY DATA

3

CODEN

otr ham emb 1 umol/L

CNREA8 39 193 79

dnd ham emb 1 umol/L

CNREA8 39 193 79

ipr mus LD50 14 mg/kg

TXAPA9 49 41 79

cyt hmn lym 10 nmol/L

MUREAV 85 236 81

ipr rat TDLo 2371 ug/kg (14D preg)

BECTA6 20 206 78

ipr rat TDLo 1 mg/kg (14D preg)

BECTA6 23 25 79

ipr rat TDLo 2 mg/kg (20D preg)

BECTA6 23 25 79

Reported in EPA TSCA Inventory 1980

THR MUT data HIGH ipr See also cadmium com
pounds

Disaster Hazard When heated to decomp it emits tox
fumes of Cd

CADMIUM BIS(2 ETHYLHEXYL) PHOSPHITE

CAS RN 7495934

NIOSH # TG 6475000

mf C₃₂H₆₈O₆P₂ Cd mw 723 34

SYN PHOSPHORUS ACID BIS(2 ETHYLHEXYL) ESTER CADMIUM SALT

TOXICITY DATA

3

CODEN

ipr mus LDLo 250 mg/kg

CBCCT* 7 790 55

Occupational Exposure to Cadmium recm std Air TWA
40 ug/m3 CL 200 ug/m3/15M NTIS**

THR HIGH ipr See also cadmium compounds

Disaster Hazard When heated to decomp it emits tox
fumes of PO_x and Cd

CADMIUM CAPRYLATE

CAS RN 2191108

NIOSH # RH 0370000

mf C₁₆H₃₀O₄ Cd mw 398 86

SYN OCTANOIC ACID CADMIUM SALT (2 1)

TOXICITY DATA

3 2

CODEN

orl rat LD50 950 mg/kg

JHEMA2 18 144 74

itr rat LDLo 10 mg/kg

JHEMA2 18 144 74

orl mus LD50 300 mg/kg

JHEMA2 18 144 74

Occupational Exposure to Cadmium recm std Air TW
40 ug/m3 CL 200 ug/m3/15M NTIS** Reported
EPA TSCA Inventory 1980

SYN MERCURY NUCLEATE, SOLID (DOT)

TOXICITY DATA 3

DOT Poison B Label Poison FEREAC 41 57018 76

Occupational Exposure to Inorganic Mercury recm std
Air TWA 0.05 mg(Hg)/m³ NTIS**

THR A poison See also mercury compounds

Disaster Hazard When heated to decomp it emits tox
fumes of Hg

MERCUROPHEN

CAS RN 17140737 NIOSH # OW 4550000
mf C₆H₄HgNO₄ Na mw 377 70Brick red odorless powder Sol in hot H₂O

TOXICITY DATA 3

CODEN
ivn rat LDLo 8 mg/kg 12VXA5 8 661 68
ims rat LDLo 12 mg/kg 12VXA5 8 661 68
ivn rbt LDLo 4 mg/kg 12VXA5 8 661 68Occupational Exposure to Inorganic Mercury recm std
Air TWA 0.05 mg(Hg)/m³ NTIS**THR HIGH ivn ims See also mercury compounds Poi
sonDisaster Hazard When heated to decomp it emits very
tox fumes of NO_x and Hg vapors

MERCUROPHYLLINE

CAS RN 8012348 NIOSH # OV 8650000

SYNS

MERCUPURIN

MERCUZANTHIN

TOXICITY DATA 3-2

CODEN
ivn hmn TDLo 28 mg/kg CNS JAMAAP 117 1806 41
scu mus LD50 163 mg(Hg)/kg JPETAB 105 336 52
ivn mus LD50 1410 mg/kg JPETAB 99 149 50
ivn-cat LDLo 250 mg/kg JPETAB 99 149 50
ivn rbt LDLo 177 mg/kg JPETAB 99 149 50Occupational Exposure to Inorganic Mercury recm std
Air TWA 0.05 mg(Hg)/m³ NTIS**THR A hmn CNS HIGH scu ivn MOD ivn See also
mercury compoundsDisaster Hazard When heated to decomp it emits tox
fumes of Hg

MERCUROUS CHLORIDE

CAS RN 7546307 NIOSH # OV 8750000
mf Cl₂Hg₂ mw 472 09White odorless tasteless heavy powder or crystals Sun
light causes it to decomp into mercuric chloride and me-
tallic Hg Insol in H₂O alc and ether Protect from light
Subl @ 400° d 7 150

SYNS

MERCURY(I) CHLORIDE
C I 77764

CALOMEL

CALOMELANO (ITALIAN)

CHLORURE MERCUREUX
(FRENCH)

CLORURO MERCUROSO (ITALIAN)

KALOMEL (GERMAN)

MERCUROCHLORIDE (DUTCH)

MERCURY MONOCHLORIDE

MERCURY PROTOCHLORIDE

MILD MERCURY CHLORIDE

QUECKSILBER(I)-CHLORID (GER
MAN)

SUBCHLORIDE OF MERCURY

TOXICITY DATA 3

mrc bcs 50 mmol/L
orl rat LD50 210 mg/kg

CODEN

MUREAV 77 109 80
WRPCA2 9 119 70

Toxicology Review SDGTB3 1(2) 177 71 RREVAH

42 103 72 27ZTAP 3 91 69 Occupational Exposure to

Inorganic Mercury recm std Air TWA 0.05 mg(Hg)/

m³ NTIS** Reported in EPA TSCA Inventory 1980THR MUT data HIGH orl See also mercury com
poundsDisaster Hazard When heated to decomp it emits very
tox fumes of Cl⁻ and Hg

Human Tox Excessive doses may cause Hg poisoning

Antidote BAL (Dimercaprol) If laxation from oral mer
curous chloride should not occur saline laxative must
be administered to prevent possibility of Hg poisoningMed Incomp Bromides iodides alkali chlorides sulfates
sulfites carbonates hydroxides lime water acacia, am
monia, golden antimony sulfide cocaine cyanides, cop
per salts hydrogen peroxide iodine iodoform Pb salts
silver salts soap sulfides

MERCURY

CAS RN 7439976

NIOSH # OV 4550000

af Hg, aw 200 59

Silvery liquid metallic element mp -38.89° bp 356.9°
d 13.546 vap press 1 mm @ 126.2° vap press @
25° = 2 × 10⁻³ mm

SYNS

COLLOIDAL MERCURY

KWIK (DUTCH)

MERCURE (FRENCH)

MERCURIO (ITALIAN)

MERCURY METALLIC (DOT)

NCI-C60399

QUECKSILBER (GERMAN)

QUICK SILVER

RTEC (POLISH)

TOXICITY DATA 3

ihl rat TCLo 890 ng/m³/24H (16W
male)ihl rat TCLo 7440 ng/m³/24H (16W
male)

ipr rat TDLo 400 mg/kg/14D I ETA

ihl wmn TCLo 150 ug/m³/46D GITihl wmn TCLo 150 ug/m³/46D CNSihl rbt LCLo 29 mg/m³/30H

CODEN

GISAAA 45(3) 72 80

GISAAA 45(3) 72 80

ZEKBAI 61 511 57

AEHLAU 33 186 78

AEHLAU 33 186 78

AMIHBC 7 19 53

TLV Air 0.05 mg(Hg)/m³ (skin) DTLVS* 4 254 80

Toxicology Review AJOGAH 126(3) 390,76 JTEHD6

2(3) 491,77, TRBMAV 33(1) 85 75 PHJOAV

213(5781) 159 74 JDSCAE 58(12),1767 75, CPEDAM

13 783 74 QURBAW 7(1) 75 74 AEMBAP 48 463 74,

JAVMA4 164(3) 277 74 31ZNAA 2 365 73

AEMBAP 40 239 73, CTOXAO 5(2) 151 72 BIOGAL

41(7) 208 75 ADTEAS 5 51 72 RREVAH 42 103 72

FOREAE 7 313 42 NISIA9 27(9) 942 74 MIBUBI

9(4) 321 75 STEVA8 2(4) 341 74 ENVRAL 13 36 77

85CVA2 5 63,70 JOCMA7 2 337 60 PEXTAR

12 102 69 PDTNBH 6 204,77

OSHA Standard Air CL 1 mg/10m³ (SCP N) FEREAC

39,23540 74 DOT ORM B Label None FEREAC

41 57018 76 Occupational Exposure to Inorganic Mer

cury recm std Air TWA 0.05 mg(Hg)/m³ NTIS**

NIOSH Manual of Analytical Methods VOL 1

SYNS

SILICON TETRACHLORIDE

TETRACHLOROSILANE

TOXICITY DATA 2

CODEN

ihl rat LC50 8000 ppm/4H

JIHTAB 31 343 49

Aquatic Toxicity Rating TLm96 1000-100 ppm
 WQCHM* 4 74 DOT Corrosive Material Label
 Corrosive FEREAC 41 57018 76 Reported in EPA
 TSCA Inventory 1980 EPA TSCA 8(a) Preliminary
 Assessment Information Proposed Rule FERREAC
 45 13646 80

SKIN AND EYE IRRITATION

DATA

CODEN

skn rbt 500 mg/24H SEV

28ZPAK 14 72

eye rbt 20 mg/24H SEV

28ZPAK 14 72

THR SEV skn, eye irr MOD ihl Decomp by water
 with much heat into silicic acid and HCl
Disaster Hazard Dangerous when heated to decomp it
 emits highly tox fumes of HCl will react with water
 or steam to produce heat and tox and corrosive fumes
Incomp Dimethyl sulfoxide K Na

SILICON FLUORIDE

CAS RN 7783611

NIOSH # VW 2327000

mf F₄Si mw 104 09

Colorless gas very pungent odor mp -77° bp -65°
 @ 181 mm, d 4 67

TOXICITY DATA 3

CODEN

DOT Nonflammable Gas Label Nonflammable Gas
 FEREAC 41 57018 76 Reported in EPA TSCA Inven
 tory 1980

THR No data See also fluorides and hydrofluoric acid
 Very irr to skn eyes and mu mem

Disaster Hazard When heated to decomp it emits tox
 fumes of F⁻

SILICON OXIDE

mf OSi mw 44 09

THR No tox data Explodes spontaneously in air

SILICON TETRAAZIDE

mf N₁₂Si mw 196 17

THR No tox data See also azides Has exploded spont
Disaster Hazard When heated to decomp it emits tox
 fumes of NO₂

SILK

NIOSH # VW 2700000

TOXICITY DATA 3

CODEN

imp-rat TDLo 36 mg/kg ETA

CNREA8 15 333 55

THR An exper ETA In the form of dust it is an allergen
 and a nuisance dust A MOD fire hazard and expl
 hazard

Disaster Hazard When heated to decomp it emits acrid
 smoke and fumes

SILVER

CAS RN 7440224

NIOSH # VW 3500000

af Ag aw 107 87

Soft ductile malleable lustrous white metal mp
 961 93° bp 2212° d 10 50 @ 20°

SYNS

ARGENTUM

SILBER (GERMAN)

C I 77820

SILVER ATOM

SHELL SILVER

TOXICITY DATA 3

CODEN

mul rat TDLo 330 mg/kg/43W I

ZEKBAI 63 586 60

TFX ETA

imp-rat TDLo 2400 mg/kg TFX ETA

CNREA8 16 439 56

imp-mus TDLo 11 gm/kg TFX ETA

NATWAY 42 75 55

imp-rat TD 2570 mg/kg TFX ETA

NATWAY 42 75 55

ihl hmn TCLo 1 mg/m3 TFX SKN

DTLVS* 3 231 71

TLV Air 0 1 mg/m3 *DTLVS** 4 367 80 *Toxicology Re*
view FOREAE 7 313 42 MIBUBI 9(4) 321 75
 PTPAD4 1 127 76 AJMEAZ 38 409 65 PEXTAR
 12 102 69 OSHA Standard Air TWA 10 ug/m3
 (SCP N) FEREAC 39 23540 74 Reported in EPA
 TSCA Inventory 1980

THR An exper ETA A hmn SKN See also silver com
 pounds

Fire Hazard Mod in the form of dust when exposed
 to flame or by chemical reaction with C₂H₂ NH₃ bro
 moazide ClF₃ ethylene imine H₂O₂ oxalic acid,
 H₂SO₄ tartaric acid See also powdered metals
 For further information see Vol 1 No 1 of *DPIM Report*

SILVER ACETYLIDE

mf C₂HAg mw 132 90

THR No tox data See also silver compounds

Explosion Hazard Very high

Disaster Hazard When heated to decomp it emits acrid
 smoke and fumes

SILVER AMIDE

mf AgH₂N mw 123 89

THR No tox data See also silver compounds Very ex
 plosive when dry

Disaster Hazard When heated to decomp it emits tox
 fumes of NO₂

SILVER 5 AMINOTETRAZOLIDE

mf CH₂AgN₅ mw 191 93

THR No tox data See also silver compounds When
 heated it explodes

Disaster Hazard When heated to decomp it emits tox
 fumes of NO₂

SILVER AMMONIUM COMPOUNDS

THR See silver compounds

Explosion Hazard Severe when shocked exposed to heat
 or by chemical reaction

2390 SELENIOS ACID

Disaster Hazard When heated to decomp it emits tox fumes of Se

SELENIOS ACID

CAS RN 7783008 NIOSH # VS 7175000
mf H₂O₃Se mw 128.98

Transparent colorless crystals mp decomp d 3.004 @ 15°/4° vap press 2 mm @ 15° Very sol in alc insol in ammonia

TOXICITY DATA	3	CODEN
orl rat LDLo 25 mg/kg		NCNSA6 5 28 53
ipr rat LDLo 10 mg/kg		NCNSA6 5 28 53
ivn mus LD50 11 mg/kg		CSLNX* NX#05656

OSHA Standard Air TWA 200 ug(Se)/m³ (SCP X)
FEREAC 39 23540 74 Reported in EPA TSCA Inventory 1980

THR HIGH orl ipr ivn See also selenium

Disaster Hazard When heated to decomp it emits tox fumes of Se

SELENIUM

CAS RN 7782492 NIOSH # VS 7700000
af Se aw 78.96

Steel gray non metallic element mp 170° 217° bp 690° d 4.81-4.26 vap press 1 mm @ 356°

SYNS

SELENIUM ALLOY	ELEMENTAL SELENIUM
SELENIUM BASE	SELEN (POLISH)
SELENIUM HOMOPOLYMER	SELENIUM DUST
C I 77805	

TOXICITY DATA	3	CODEN
orl mus TDLo 134 mg/kg (MGN)		AEHLAU 23 102 71
orl mus TDLo 480 mg/kg/60D C ETA		YMBUA7 11 368 60
ihl rat LDLo 33 mg/kg/8H		AMIHBC 4 458 51
ivn rat LD50 6 mg/kg		AMIHBC 4 458 51
unk frg LDLo 3 mg/kg		PHREA7 23 305 43

TLV Air 0.2 mg/m³ (Se) DTLVS* 4 361 80

Toxicology Review CTOXAO 6(3) 459 73 CTOXAO 5(2) 175 72 31ZNAA 4(3) 271 76, JAVMA4 164(3) 277 74 CTOXAO 5(2) 151 72 IJMDAI 10(4) 416 74 JAMAAP 116 562 41 CHREAY 28 179 41 ADTEAS 5 51 72 PHREA7 23 305 43 FOREAE 7 313 42 KOTTAM 11(11) 1300 75 85CVA2 5 63 70 PEXTAR 12 102 69 BNYMAM 54 413 78 AMTODM 3 209 77 OSHA Standard Air TWA 200 ug(Se)/m³ (SCP X) FEREAC 39 23540 74 NIOSH Manual of Analytical Methods VOL 1 124 181 VOL 3 S190 Reported in EPA TSCA Inventory 1980

THR An exper ETA HIGH ihl ivn unk See also selenium compounds

Disaster Hazard When heated to decomp it emits tox fumes of Se Can react violently with barium carbide bromine pentafluoride calcium carbide chlorates chlorine trifluoride chromic oxide (CrO₃) fluorine lithium carbide lithium silicon (Li₆ Si₂) nickel nitric

acid sodium nitrogen trichloride oxygen potassium potassium bromate rubidium carbide zinc silver bromate strontium carbide thorium carbide uranium
For further information see Vol 1 No 3 of *DPIM Report*

SELENIUM (COLLOIDAL)

CAS RN 7782492 NIOSH # VS 8310000

TOXICITY DATA	3	CODEN
ivn rat LDLo 6 mg/kg		JPETAB 33 270 28

Reported in EPA TSCA Inventory 1980

THR HIGH ivn See also selenium and selenium compounds

Disaster Hazard When heated to decomp it emits tox fumes of Se

SELENIUM COMPOUNDS

THR HIGH via ivn and inhal routes An exper carc Selenium in small amounts is essential for normal growth of some animals Deficiency or excess is associated with serious disease in livestock Long term exposure may be a cause of amyotrophic lateral sclerosis in hmns just as it may cause blind staggers in cattle Elemental selenium has low acute systemic toxicity but dust or fumes can cause serious irr of the respiratory tract Hydrogen selenide resembles other hydrides in being highly toxic and selenium oxychloride is a vesicant Some organoselenium compounds have the high toxicity of other organometals Inorganic selenium compounds can cause dermatitis Garlic odor of breath is a common symptom Pallor nervousness depression and digestive disturbances have been reported in cases of chronic exposure Selenium compounds are common air contaminants

SELENIUM DIMETHYLDITHIOCARBAMATE

CAS RN 144343 NIOSH # VT 0780000
mf C₁₂H₂₄N₄S₈ Se mw 559.84

Yellow powd cryst d 1.58 M range 140° 172°

SYNS

METHYL SELENAC	TETRAKIS(DIMETHYLCARBAMODITHIOATO-S,S)SELENIUM
----------------	--

TOXICITY DATA	3	CODEN
Carcinogenic Determination	Indefinite	IARC** 12 161 76
Toxicology Review	85CVA2 5 250 70	Reported in EPA TSCA Inventory 1980

THR An exper ± CARC See also selenium compounds and carbamates

Disaster Hazard When heated to decomp it emits very tox fumes of Se SO_x and NO_x

SELENIUM (IV) DIOXIDE (1 2)

CAS RN 7446084 NIOSH # VS 8575000
mf O₂Se mw 110.96

White to slightly reddish lustrous crystalline powder or

PREFACE

U S DEPARTMENT OF COMMERCE
 LOUIS H. HODGES, Secretary

WEATHER BUREAU
 F W REINHOLD, Chief

TECHNICAL PAPER NO. 40

RAINFALL FREQUENCY ATLAS OF THE UNITED STATES

for Durations from 30 Minutes to 24 Hours and
 Return Periods from 1 to 100 Years

Prepared by
 DAVID M. HENSHOFF
 Cooperative Studies Section, Hydrologic Services Division
 for
 Engineering Division, Soil Conservation Service
 U S Department of Agriculture

THIS ATLAS IS OBSOLETE FOR THE FOLLOWING 11 WESTERN STATES: Arizona, California, Colorado, Idaho, Montana, Nevada, New Mexico, Oregon, Utah, Washington, and Wyoming.

NOAA ATLAS 2: PRECIPITATION FREQUENCY ATLAS OF THE WESTERN UNITED STATES (GPO 11 Vols 1973) supersedes the Technical Paper 40 data for these states.

All but 3 of the 11 state volumes are out of print and no reprint is presently planned.

Institutions in the eleven western states likely to have copies of these volumes for their state for public inspection are:

US Department of Agriculture Soil Conservation Service Offices
 US Army Corps of Engineers Offices
 Selected University Libraries
 National Weather Service Offices (may also have volumes for adjacent states)
 National Weather Service Forecast Offices (may have all eleven volumes)

Elsewhere libraries of universities where hydrology and meteorology degree programs are offered may shelve some of the eleven volumes.

The three volumes in print as of 1 Jan 1983 at the GPO are

Vol	State	GPO Stock Number	Price
IV	New Mexico	003 017 00158 0	\$10.00
VI	Utah	003 017 00160 1	12.00
VII	Nevada	003 017 00161 0	9.50

NOTICE
 Rainfall frequency information for durations of 1 hour and less for the Central and Eastern States has been superseded by NOAA Technical Memorandum NWS HYDRO 35 Five to Sixty Minute Precipitation Frequency for the Eastern and Central United States. This publication (Accession No. TB 777 117/AS) is obtainable from


National Technical Information Service
 5285 Port Royal Road
 Springfield, VA 22161



WASHINGTON, D.C.

1 1961

11 GPO Distribution is 02 783 3 30 for VISA and MASTERCARD orders which

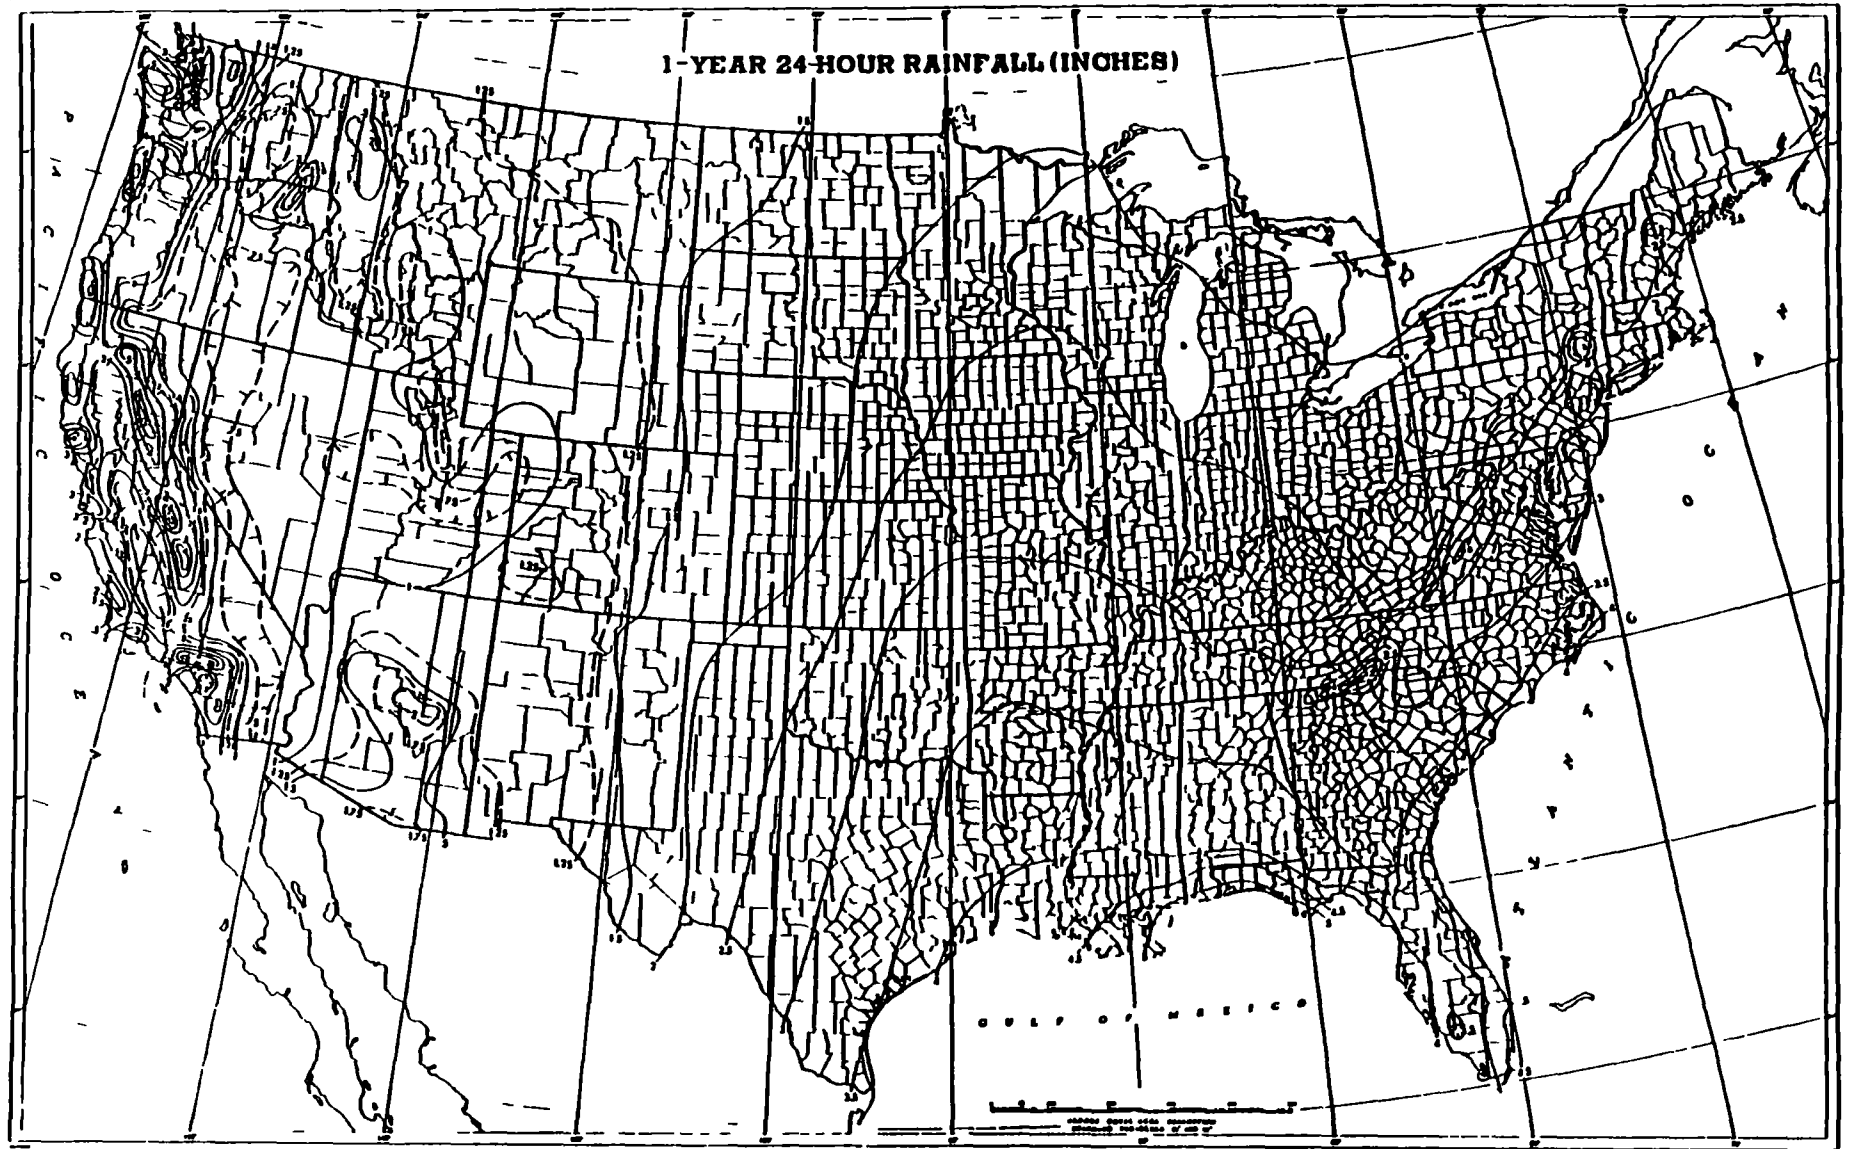

TWC Reg No 31633TEXAS WATER COMMISSION
Comprehensive GW Monitoring Evaluation (CME) ReportINSPECTION COVER SHEETEPA ID No TXD0008377369

JUN 08 1987

C O Use Only

Date Entry Date

NAME OF COMPANY Houston Lighting and Power-WebsterSITE ADDRESS P O Box 1700, Houston, Texas Tel (713) 922-2186COUNTY Harris TYPE OF INDUSTRY Electric Power GenerationCurrent GW Monitoring Status Detection Monitoring before closure(Specify for each Waste
Management Area "WMA")HL&P is no longer sampling wellsInspection InformationInspector(s) Robert Hahn (TWC) Date(s) 4-24-87Participants Doug Chin (HL&P), Richard Bye (HL&P)Type of Inspection (check) EV CME X SA Evaluation

	S	U
A. Monitoring System	<u>X</u>	<u> </u>
B. Sampling Procedures	<u>X</u>	<u> </u>
C. Analysis & Results	<u> </u>	<u> </u>
D. Records & Response	<u>X</u>	<u> </u>

Signed Robert W HahnDate 5-27-87Signed Mary L AmbroseDate 6/5/87

PSL - 6/5/87

S= Satisfactory U= Unsatisfactory

Overall Evaluation: Compliant X NonCompliant

IWC Reg. No. 31633

TEXAS WATER COMMISSION
Comprehensive GW Monitoring Evaluation (CME) Report

CONTENTS SHEET

FACILITY NAME Houston Lighting and Power - Webster Generating Station

- X 1. Code Sheet (0814)
- ___ 2. Interoffice Memorandum (IOM)
- X 3. Inspection Cover Sheet
- X 4. Technical Report, with supporting Attachments
 - X A. Monitoring System
 - X B. Sampling Procedures
 - * C. Analysis and Results
 - X D. Records and Response
- ___ 5. EV Inspection Checklist (if joint inspection with District Office)
- ___ 6. Notice of Violation (NOV) / Enforcement Letter to Facility
- ___ 7. Other (describe) _____

* If a required Checklist is omitted, Explain _____

* Section will be submitted when results of sample analysis are completed.

COMPREHENSIVE MONITORING EVALUATION
SUMMARY

The Comprehensive Monitoring Evaluation was conducted at the Houston Lighting and Power Webster Generating Plant on April 24, 1987

Findings

The locations of monitor wells installed at the Webster Plant were approved on July 22, 1982 by the Texas Department of Water Resources. The following findings represent deficiencies in the ground-water monitoring program which is no longer in operation due to certified closures of the surface impoundments under an approved closure plan

- 1 Background ground-water quality was not properly defined. The upgradient well, MW1, is influenced by water quality from the saline Discharge Canal
- 2 All monitor wells appear to have been improperly surveyed or reported incorrectly. Elevations of screened intervals and total depths reported with respect to Mean Sea Level do not take into consideration stick up lengths or ground surface elevations
- 3 Total well depth measurements have not been performed to confirm discrepancies noted in various reports
- 4 Total Organic Carbon and phenols have not been preserved with acid in the field

Because of the following (1) the locations of the monitor wells were approved by the TWC (then the TDWR), (2) the surface impoundments have been certified clean closed and soil and water samples have not confirmed any release, no further action required by the company is warranted. The company should be requested to resolve the discrepancies noted concerning monitor well elevations, total depths, and screened interval elevations for the Central Records files and before approval of the Affidavit of Exclusion

TECHNICAL REVIEW
Comprehensive Ground Water Monitoring Evaluation

I Introduction

A Company - Houston Lighting and Power Company
Webster Generating Station

- 1 Process description Electrical power generation
- 2 Plant site has been in operation since May 1965

B Physiography and Climate

- 1 Site Topography - Attachment A (indicate site location directly on map or reproduction)

Slope <1% to the south

- 2 Average Annual

- a Rainfall - 48 inches
- b Temperature - 69 °F
- c Evaporation - 50 inches

- 3 Was an annual water balance budget submitted by the company (yes/no)? NO

- 4 Surficial Soils Map - Attachment B

- a Soil type - Midland silty clay loam
- b Soil properties, including permeability, texture, etc -

The surface impoundments are constructed on Midland Series silty clay loam soils. This soil series consists of multicolored clays which are slightly to strongly acidic, very hard, sticky and plastic. The soil is characterized as having a high to very high shrink swell capacity, high available water capacity, low permeability, poor drainage, and contains some non-intersecting slickensides, few iron, manganese and some calcium carbonate concretions below a depth of 30 inches. Attachment B also presents a table of the soil properties.

- 5 Proximity to surface water bodies and other recharge/discharge features. The site is adjacent to Clear Creek and 1 mile east of Clear Lake. Two plant water wells screened at 460 and 640 ft depths exist on-site for use as process water. A cooling water discharge canal which influences water quality in Monitor well MW-1, is located north of MW-1. The distance as indicated on a map is approximately 130 ft away from MW-1, however, the actual

distance is less than 100 ft A small ditch full of water is located approximately 15 ft between MW-1 and the discharge canal The bank of the discharge canal is approximately 10 ft higher in elevation in comparison to the ground elevation at MW-1

6 Proximity to water supply wells

A survey of water wells located within a 2 5 mile radius of the plant revealed the presence of 152 water wells which included 60 domestic wells, 26 public or municipal wells, 25 wells without documentation, 19 wells no longer in use, 13 industrial wells, 3 water level observation wells, 1 livestock well and 1 service station well The wells range in depth from 84 to 700 feet deep and are either completed in the Beaumont Aquifer (Upper Chicot) or Evangeline Aquifer (Lower Chicot). Two plant water wells having screen depths of 460 and 640 feet are located within the property boundaries

C Waste Management Units

- 1 Indicate units on Site Diagram (Attachment C)
- 2 Indicate waste management area (WMA) boundaries on Site Diagram (Attachment C)
- 3 Waste management units (complete this section for each waste management unit)

Unit name	- <u>Demineralizer Regenerant boiler blowdown surface impoundment</u>	<u>Inorganic Metal Cleaning Surface Impoundment</u>
Size	- 5'x200'x130' (794 acres)	4 25'x200'x135'
Year in service-	1970	1977
Status*	- Closed	Closed
Construction	- 3 ft compacted clay liner	3 ft compacted clay liner
Type of waste	- Boiler water	Spent acids from metal cleaning operations
Total volume of waste received -	Not available	Not available

* active, closed, inactive, regulated unit, nonhazardous

Comments

Both surface impoundments have been certified closed and Affidavits of Exclusion from Hazardous Waste Permitting have been submitted and are currently being processed by the TWC Hazardous and Solid Waste Reports and Management Section At the time of the CME, the surface impoundments were observed to be full of liquid HL&P stated that the Demineralizer surface impoundment contained boiler blowdown water also A third impoundment, known as the Organic Acid Waste pond which is not subject to permit requirements is still in use for storing ammoniated citric acid

This impoundment is shown on Attachment C as SI-3

- 4 If a unit is closing or closed, complete the closure checklist and include as Attachment D

II Technical Review

A Hydrogeology

1 Regional Geology (Houston Sheet, Geologic Atlas of Texas)

a Physiographic province Gulf Coastal Plain

b Formation(s) Beaumont Formation

- 1) lithology - fluvial-deltaic clays and silts
- 2) regional dip and gradient - <2 ft/mile for the Beaumont towards the Gulf of Mexico

c Usable quality (<10,000 TDS) ground water

- 1) depth to top/bottom - Top 84 ft reported for a domestic well drilled in 1971 for domestic use Bottom 2900,
- 2) reference - Baker (1979, TDWR 236)

d Regional ground water flow

- 1) direction - toward the Gulf although in the vicinity of the Webster Plant, the direction is toward the northwest as a result of the pumping of large quantities of groundwater in the Houston District.
- 2) reference - Baker (1979, TDWR 236)

e Is the site located on the recharge area of a major/minor named aquifer (yes/no)? NO

f Part B Permit Application, Geology Report, pages Section 8

g If a Part B Application was submitted, does it request a waiver from ground-water monitoring (yes/no)? NO waiver rejected 3-82

Comments The site is located on intertributary areas of fluvial dominated deltaic plains. The sediments are clay dominated and represent overbank flooding deposition. Subsidence in the Webster plant area has been reported at 7 feet since 1906

2 Site Hydrology

a Site Diagram - Attachment E (include locations of waste management area(s), borings, wells, lines of cross-sections)

b Depth to water - 6 to 14 feet below ground surface level
As determined by - water level measurements in monitor wells

- c Site stratigraphy to depth of investigation -1000 ft (complete this section for each encountered unit)

Stratigraphy as determined from plant borings (Surface to 80 ft) Attachment F presents electric log interpretations for the 2 on-site plant water wells to a depth of 1000 ft

Unit	-	Clay
Depth encountered	-	Surface to 30 ft
Description	-	<u>Surface to 5 ft</u> Soft to very stiff dark brown clay often varying to yellowish brown or reddish brown in color below a depth of 1 foot, observed to contain calcareous and ferrous nodules, roots, gravel, shells, and occasional sand or silt lenses in the upper 5 feet It is not considered a separate unit
		<u>5 to approx 20 ft</u> Multicolored clay varying from brown, tan, reddish brown, light gray, observed to consist of calcareous and ferrous nodules and generally skickensided within the 8 to 13 ft interval
		<u>18 to 23 ft</u> Reddish brown clayey to sandy silt varying from 1 to 4 ft in thickness Observed to contain sand pockets
		<u>23 to 30 ft</u> Stiff brown to tan clay
Thickness	-	30 ft
Saturated thickness	-	approximately 20 feet
Confined/unconfined	-	Water table, presence of water thought to be due to seepage from the cooling water discharge canal
Potentiometric rise	-	N/A

Comments Below a depth of 30 feet, the stratigraphy directly beneath the surface impoundments has not been defined However, plant borings approximately 1000 feet away possibly project a 15 foot tan colored sand at a depth of 40 feet beneath the impoundments The sand appears to have a geometry similar to a crevasse splay deposit (Assessment Report, 5-29-84) From a depth of 60 to 80 feet, plant boring CB-1 revealed a 15 foot thick red and gray silty clay overlying a gray and tan sandy clay At this same depth interval, CB-11 encountered a "calcium shell marl " No data is available for the 80 to 100 ft interval

Plant water well electric logs reveal a 20 ft sand at a depth of 100 ft followed by an interbedded sequence of sand and clay to a depth of 250 ft From 250 ft to approximately 450 ft depth, the sediments appear to be predominantly clay rich A 120 ft sand, which is screened in Plant water well #2, is present at a depth of 500 feet. The base of this thick sand represents the base of the Chicot Aquifer Approximately 300

ft. of interdistributary clayey sediments isolates this sand from another 100 ft thick sand located at a depth of 900 ft
This sand is considered part of the Evangeline Aquifer

- d Hydraulic conductivity to depth of investigation - (complete this section for each encountered unit)

Unit	- Clay, 3 ft	Clay, 7 ft	Sandy Silt
			22-27 ft 23-28 ft
Hydraulic conductivity	- 1 2-6 3 10^{-9} c/s	1 4-1 0 10^{-9} c/s	1 02 10^{-3} c/s
Type of test	- Falling head-lab	Falling head-lab	Slug test
Number of tests	- 2	2	2
Range of values	- As shown	As shown	1 5 10^{-4} to 2 7 10^{-3} cm/s

- e Cross-sections - Attachment G

- f Is first water-bearing zone identified in c above in communication with deeper zone(s) (yes/no)? It has not been determined

- g Is the aquitard(s) continuous beneath the site (yes/no)?
 Uncertain from available data Clayey sediments vary from sandy to silty clay beneath the site

- h If yes for f and g above, calculate rate of downward vertical migration from upper aquifer to lower on Attachment and list results here

Rate - Can not be determined
 Aquitard thickness -
 Migration time -

Comments

3 Site Ground Water Movement

- a Potentiometric Surface Map(s) - Attachment H (indicate inferred flow directions directly on map Include several maps to show range of observed water level measurements)

- b Calculate minimum and maximum observed gradients (1) in units of feet/foot Show on Attachment H (above) and list here

1_{\min} - 0 001 ft/ft

1_{\max} - 0 022 ft/ft

- c Calculations of average linear velocity (v) for gradients reported above, showing all assumptions, Attachment I

v_{\min} - 0.44 ft/year using $i=0.001$, $K=1.5 \times 10^{-4}$ cm/s

v_{\max} - 176 ft/yr using $i=0.022$, $K=2.7 \times 10^{-3}$ cm/s

Comments

Included in the Part B, the Ground-water quality assessment report determined a velocity of 6 ft/year using a gradient of 0.0017, $K_{ave}=1.02 \times 10^{-3}$ cm/s and porosity = 30 %. This value is within an expected range for velocities reported in the Beaumont Clay (5-20 ft/yr). The min and max values for the gradient (i) were determined from two separate 3 point problems involving different sets of 3 out of the 4 monitor wells. The maximum velocity determined in this CME using a $K=2.7 \times 10^{-3}$ cm/s appears to be high for the Beaumont Clay. Using a maximum gradient of 0.022 and $K=1.5 \times 10^{-4}$, a velocity of 9.75 ft/yr is calculated which also falls within an expected range. Using a 3 point problem, gradients of 0.022 and 0.021 were obtained from water level measurements collected on 4-24-87 (CME) and 4-19-85, respectively. The limited number of data points (4) and the possible mounding around the surface impoundments do not allow for a more precise velocity calculation to be performed. In addition, water levels determined on 12-14-83 showed the water elevation in the canal at 12.82 ft and in MW-1 at 10.53 which indicates that the canal is probably a recharge feature. As shown on the water elevation maps, wide contour intervals which represent a flatter gradient are located between the canal and MW-1, -2, and -4. This flat gradient area may be due to a recharge mound located around the discharge canal. A steeper gradient is indicated toward MW-3 and another canal. The second canal known as the intake canal may represent a discharge feature. The TWC Cross-Section (Attachment G) shows the water table sloping toward MW3 and the intake canal. No water level measurements or chemical characteristics are available for the intake canal.

5 Monitor Well Construction

- a Well Construction Diagrams - Attachment J
- b Table of Well Construction Details - Attachment K
- c Do monitor well installation and development techniques and materials of construction satisfy the requirements of 31 TAC 335.112(a)(5)/40 CFR 265.91(c) (yes/no)? NO. If no, explain in comments.

Comments

Monitor wells at the Webster Plant have been either incorrectly surveyed and/or total well depths have been improperly reported. Several discrepancies have been found in the various reports incorporated into the Part B. The following table lists data presented in the reports as well as field data.

collected during the CME As shown, total depths from the three sources of data do not agree Based on the general lithological descriptions and the positions of the screens, the Assessment Report dated 5-29-84 may be the most valid Wells were resurveyed from the top of casing as part of the Assessment Plan dated October 1983 No ground level elevations or stick up lengths were reported

Substantial Siltation As shown in the table below, an expected decrease in total well depth which would indicate siltation of the well is not indicated when measurements taken during the CME are compared to the 5-29-84 reported data The reference point used to determine the T D in the 7-22-82 data is not clear, however, the well construction diagram presented as Attachment shows the reference point as the ground surface level The increase noted in total depth measurements may be due to (1) incorrect measurements with respect to top of casing in the Part B reports, (2) collapse of the well The wells were likely drilled to a depth of 30 feet as indicated from the lithological descriptions

A high degree of siltation in the wells is indicated from the appearance of purged water from the wells Initial bailer volumes of the purged water were clear Siltation and turbidity seemed to increase with continued purging until only a very small volume of water was able to be evacuated from the wells After waiting approximately 10 minutes, purging of the well was resumed Clear water was noted again in the first bailer volume It might be envisioned that the clear water noted might represent water recharging into the well from the very top of the well screen at a slow enough rate that the incoming water did not disturb the silt buildup in the well Following removal of the first bailfull, the silt in the well was disturbed The selection of a 0 020 inch slot size may not have been appropriate for the clayey sediments

TOTAL DEPTH OF WELL (T D) TOC=Top of Casing GSL= Ground Surface Level

	<u>CME T D</u> from TOC	<u>Assessment Rpt</u> 5-29-84 (TOC)	<u>Installation Rpt</u> 7-22-82 (GSL ?)	<u>Lithology</u> 7-22-82
MW-1	23 49 ft	21	28	0 - 25 ft, clay 25- 29 ft, silty clay with sandy silt
MW-2	31 84 ft	28	29	0 - 12 ft, clay fill 12- 24 ft, clay 24- 27 ft, with silt seams 27- 30 ft, clay
MW-3	N T	29	28	0 - 21 ft, clay 21- 22 ft, interbedded with silt
MW-4	N T	28	21	0-17 5 ft, clay 17 5-19 5, sandy silt 19 5-30ft, clay

7 Monitor Well Placement

a Upgradient/background monitor well(s)

- 1) Confirmed as upgradient [31 TAC 335 112(a)(5)/40 CFR 265 91(a)(1)] (yes/no)? NO, see comments
- 2) Adequate to yield samples that are representative of background water quality [31 TAC 335 112(a)(5)/40 CFR 265 91(a)(1)(i)] (yes/no)? NO, see comments
- 3) Unaffected by the WMA [31 TAC 335 112(a)(5)/40 CFR 265 91(a)(1)(ii)] (yes/no)? YES, see comments Indicate distance(s) of upgradient well(s) from the WMA 500 ft.

Comments The upgradient well MW-1 is not influenced by the WMA (i.e., surface impoundments). However, MW-1 is strongly influenced in water quality by the discharge canal. A comparison of conductivity data collected on 12-14-83 is shown below

<u>Sample</u>	<u>Conductivity umhos/cm</u>
MW-1	12,000
Canal	14,000
MW-2	1,600
MW-3	3,200
MW-4	3,000

b Downgradient/perimeter monitor wells

- 1) Confirmed as downgradient and provide for immediate detection of hazardous waste or hazardous waste constituents that migrate from the WMA [31 TAC 335 112(a)(5)/40 CFR 265 91(a)(2)] (yes/no)? NO If no, explain in comments Indicate on Site Diagram, Attachment E above, lateral spacing of downgradient wells
- 2) Describe operator's justification for lateral spacing HL&P states that they have complied with TAC 335 112 by installing a background well and 3 down gradient wells Only 4 wells were installed because the surface impoundments are in close proximity to each other
- 3) Is the lateral spacing sufficient to satisfy the performance standard of 31 TAC 335 112(a)(5)/40 CFR 265 91(a)(2) (yes/no)? YES

- 4) Indicate on Site Diagram, Attachment E, and tabulate below the distances of downgradient wells from the edge of the WMA in the direction of ground-water flow

Well	MW-2	MW-3	MW-4	
Distance	50 ft	100 ft	150 ft	
Velocity	6 ft/yr	6 ft/yr	6 ft/yr	-assumption using
Time	8 3	16 7	25	HL&P data

Calculate ground-water travel time based on the average linear flow velocity, v (calculated in II A 4 above) Assuming conservative transport, indicate with (*) those wells that will not detect contaminants during the active life or post-closure care period of the WMA

Comments

Monitor wells MW-2 and MW-4 appear to be lateral to ground water flow Limited number of data (4 wells) do not allow for a more defensible determination of ground-water flow directions The downgradient wells appear to be located too far from the WMA's According to the time calculations above, and assuming operation of the units began in 1977, any impact upon the groundwater would not be noticeable until after the Affidavit of Exclusion is granted

- c Vertical placement - Indicate on cross-sections (Attachment G) the screened and gravel-packed intervals of wells and tabulate below

Well	Screen Length	Gravel Pack Interval	Aquifer Thickness	S/U*
MW-1	5 ft	10-21 ft	2 ft	S
MW-2	5 ft	18-28 ft	2 ft	S
MW-3	5 ft	18-29 ft	3 ft	S
MW-4	5 ft	18-29 ft	4 ft	S

*Explain in comments why vertical placement is unsatisfactory [31 TAC 335 112(a)(5)/40 CFR 265 91(c)]

Comments The length of screen and gravel pack may be satisfactory for the selected monitored interval However, it appears from plant borings located over 1000 feet away from the surface impoundments that a more appropriate zone for monitoring may be, if present, a 15 foot sand or clayey sand located at a probable depth of 40 ft below the ground surface

B Sampling Procedures

Since HL&P is no longer sampling the monitor wells on a regular basis, facility sampling was not able to be observed Instead, procedures used by the company during sampling were reviewed during a phone interview with Doug Chin, HL&P

1 Facility Sampling Plan

a Is a Sampling Plan [31 TAC 335 112(a)(5)/40 CFR 265 92(a)] maintained at the facility (yes/no)? YES Include a copy as Attachment L

b Does the plan address the following items (yes/no)?

- 1) sample collection procedures - Yes
- 2) sample preservation and shipment - Yes
- 3) analytical procedures - Yes
- 4) chain of custody procedures - Yes

c List deficiencies/omissions/recommended changes

Labels should contain mode of preservation, the Plan should specify measurements of temperature and specific conductivity to be conducted in the field, the decontamination procedure for bailers is inadequate, the Plan should specify preserving TOC and phenols with acid following sample collection, the Plan should specify the periodic determination of total well depth, the Plan should specify the collection of field blanks or equipment blanks if dedicated bailers are not used for each well

d Does the facility follow the plan during sampling events (yes/no)? NO If not, describe inconsistencies between the plan and observed sampling procedures

The types of bottles used are different than as specified in the Plan, the Plan specifies field filtering prior to preserving metal samples, the COC form specified in the plan is not used, the Plan specifies a preference to use dedicated bailers

2 Are wells equipped with (yes/no)

- a Caps - Yes
- b Lockable caps - No, screw on caps
- c Annular seals - Yes (to prevent contamination from surface sources)

Comments The Plant is surrounded by a fence with controlled access

3 Describe water level and total well depth measurement equipment and techniques Total depth measurements have not been performed since the 5-29-84 determination Water level elevations are performed on each well prior to purging using a rope with weight attached and graduated every 2 feet The weight is used to "sound" the water level A ruler graduated in 0 10 ft increments is used to refine the measurement

4 Well evacuation

- a Describe well evacuation equipment and techniques A PVC bailer is used to evacuate the well Three casing volumes are purged from the well The total depth of well used in the calculations is obtained from data in the 1984 Assessment Report
- b Describe collection and disposal methods of bailed water Is the observed disposal method appropriate (yes/no)? YES The purged water is emptied into a larger bucket which is then emptied at some distance away from the well
- c If the same equipment is used to evacuate each well, describe decontamination procedures YES, distilled water is used to rinse the bailer

5 Sample collection

- a Describe the sample collection equipment and techniques A PVC bailer is used to sample the well Sample containers are filled directly from the bailer
- b If the same equipment is used to sample each well, describe decontamination procedures Distilled water is used to rinse the bailer
- c Indicate the order in which samples are taken
 - 1) Non Preserved samples
 - 2) preserved samples

6 Field analytical procedures

- a Complete the following table for each field analysis,

Parameter	Elapsed time*	Instrument	Field/ On-site lab
pH	?	Orion Model 611	Well Head
Conductivity	?	Lee & Northrop # 486	On-site lab

*between sample extraction and parameter analysis

- b Describe field filtration equipment and techniques None
- c Parameters filtered None, samples are filtered in the contract lab

7 Complete the following table for the facility's sampling program

Container	Preservative	Parameters	S/U*
1 liter glass	ice	Ground water quality	S
1 liter glass	ice, nitric	Metals	S

*Explain in comments why the program is unsatisfactory

Comments Table 7 is applicable for samples collected 4-24-87 during the CME

8 Is the observed sampling methodology adequate for (NA/yes/no)

- a Indicator parameters - No, TOC and phenols should be preserved Conductivity should be measured at the well head
- b Quality parameters - Yes
- c Drinking water parameters - Yes
- d Metals - Yes, however, the company should have considered field filtering due to the very silty nature of the water
- e Volatile organics - N/A
- f Floating immiscible organics - N/A
- g Dense immiscible organics - N/A

9 Describe Quality Assurance/Quality Control (QA/QC) procedures used in the facility's sampling program

- a QA/QC at on-site lab - Equipment is not standardized on a frequent basis.
- b Field calibration of instruments - Only occasional calibration is performed.
- c Duplicate and/or spiked samples and blanks - None
- d (Other)

10 Chain of Custody (C O C) procedures

- a Describe C O C and shipping procedures Label is equivalent to the COC tag Sampler hand carries samples to the contract lab (Analytical Petroleum Research, APR, Dickinson, Texas)
The samples are packed in ice
 - 1) Example of C O C Form or Tag - Attachment Not Available
 - 2) Example of Sample Identification Tag or Label - Attachment ~~Not available~~ L-2
 - 3) (Other)
- b Do the C O C and shipping procedures minimize the possibility of tampering with the samples (yes/no)? Yes

11 TWC co-sampling of monitor wells - complete the following if monitor wells are co-sampled with the facility operator

a Person(s) who collected samples for

Facility - Doug Chin

TWC - Robert Hahn

b Number of wells co-sampled - 2


Total number of RCRA wells - 4

c TWC Sample Schedule - Attachment M

d TWC Field Notes - Attachment N

III Response


A List, in chronological order, activities, events and correspondence relating to groundwater monitoring in Attachment O

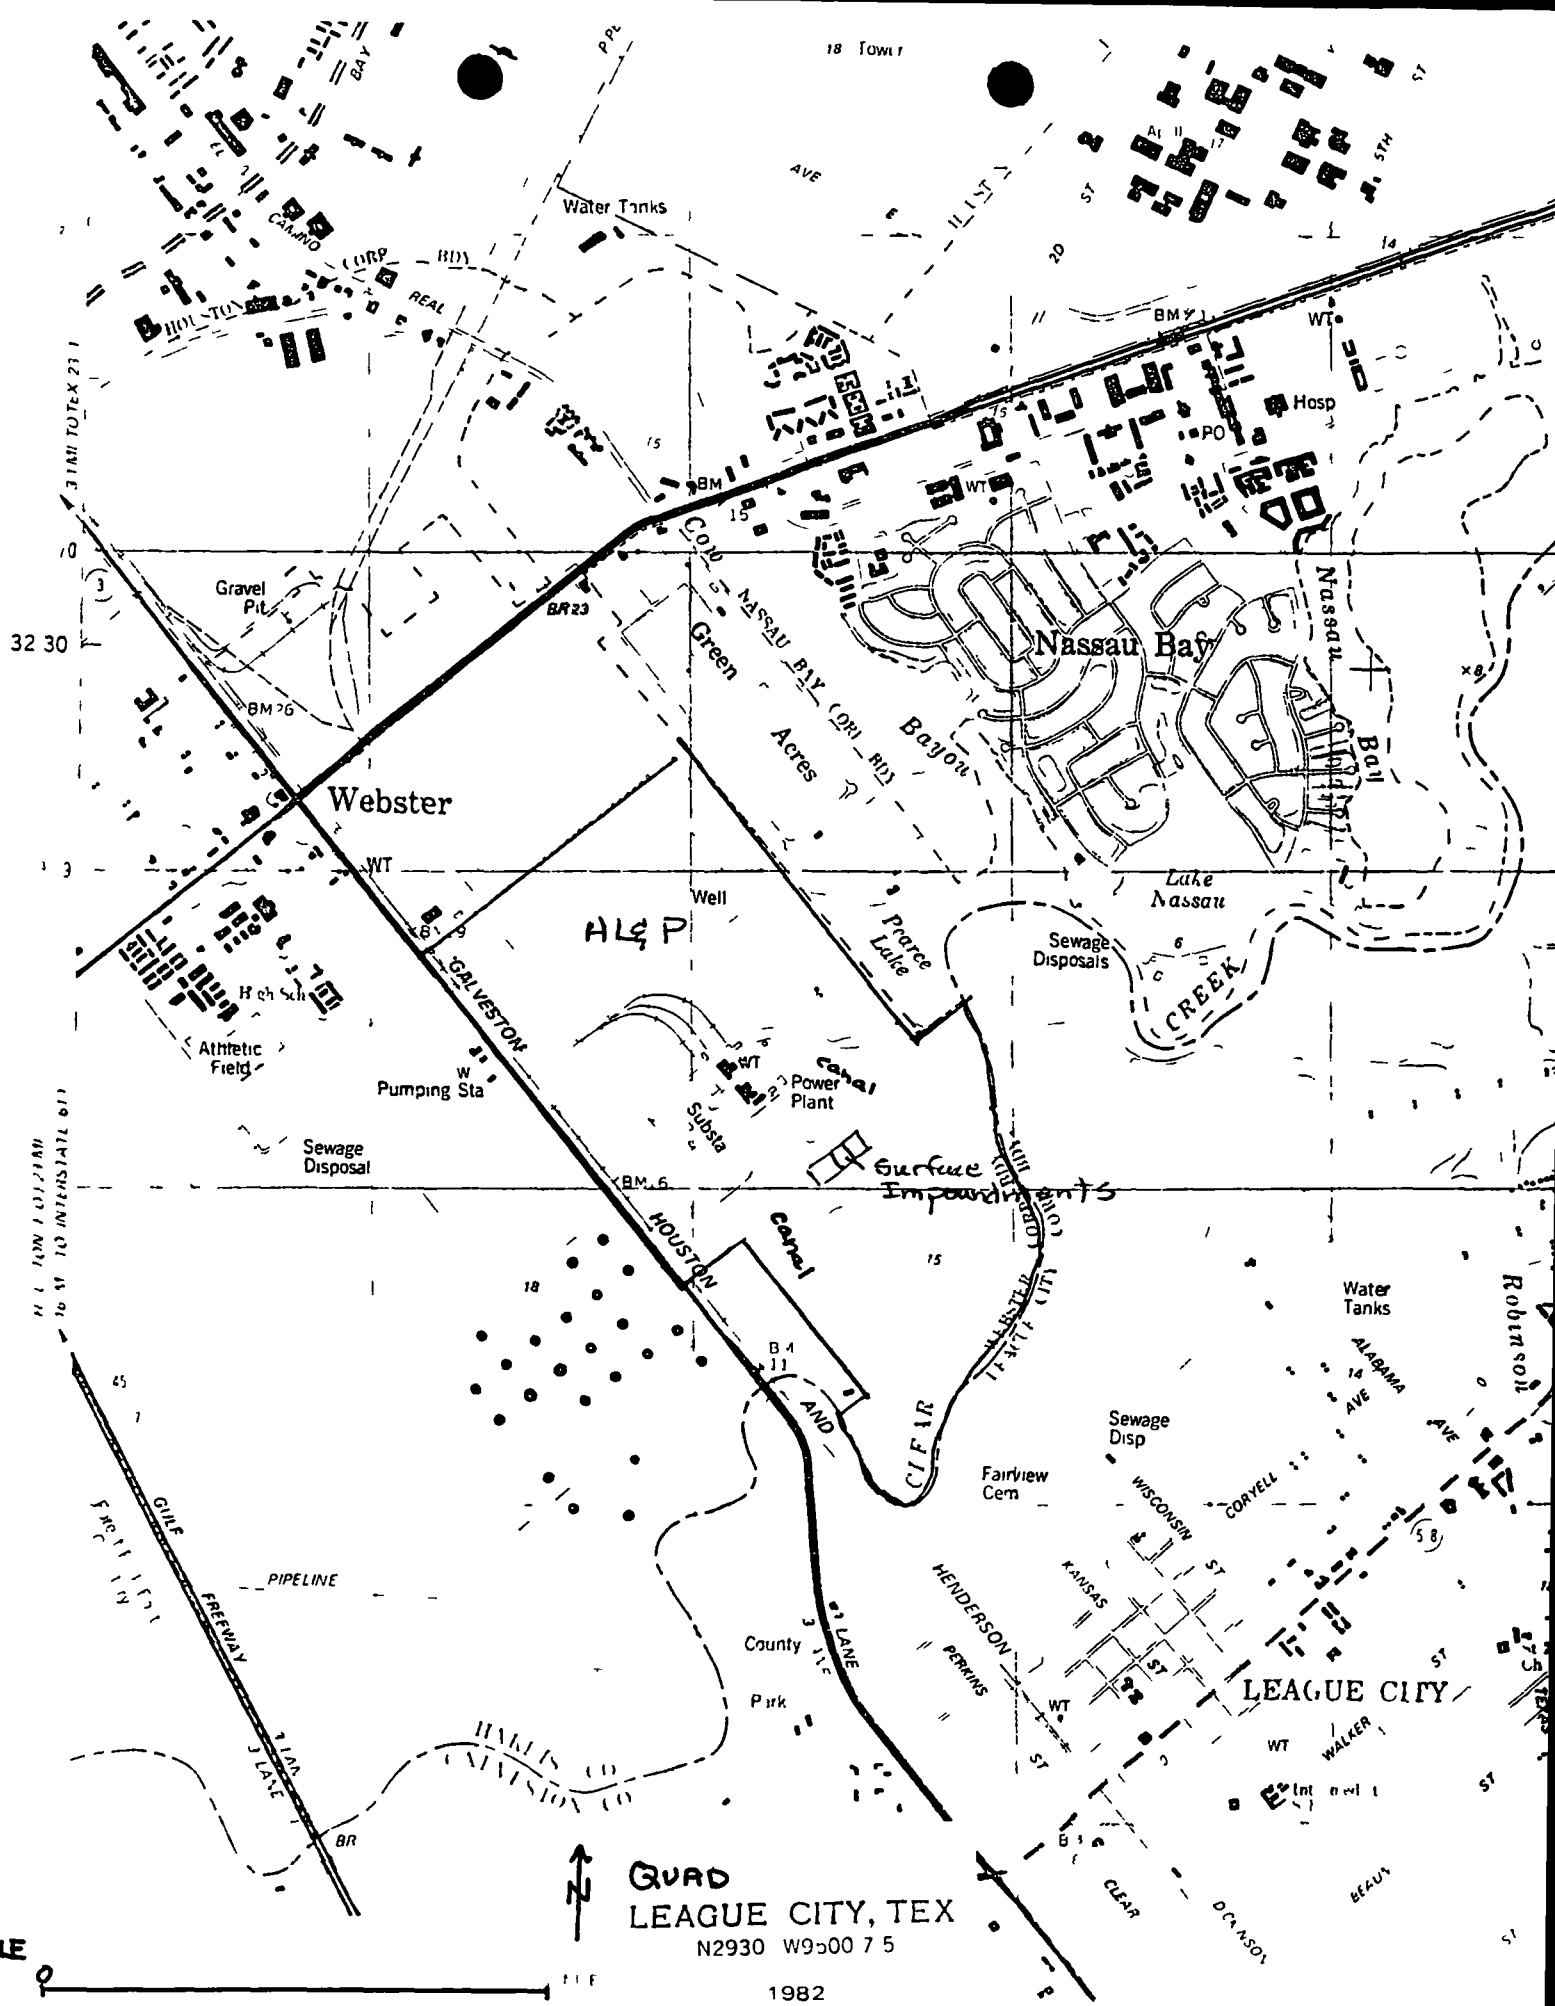

GUARD
LEAGUE CITY, TEX
N2930 W9500 7 5

1982


Attachment A-1
Site Topography

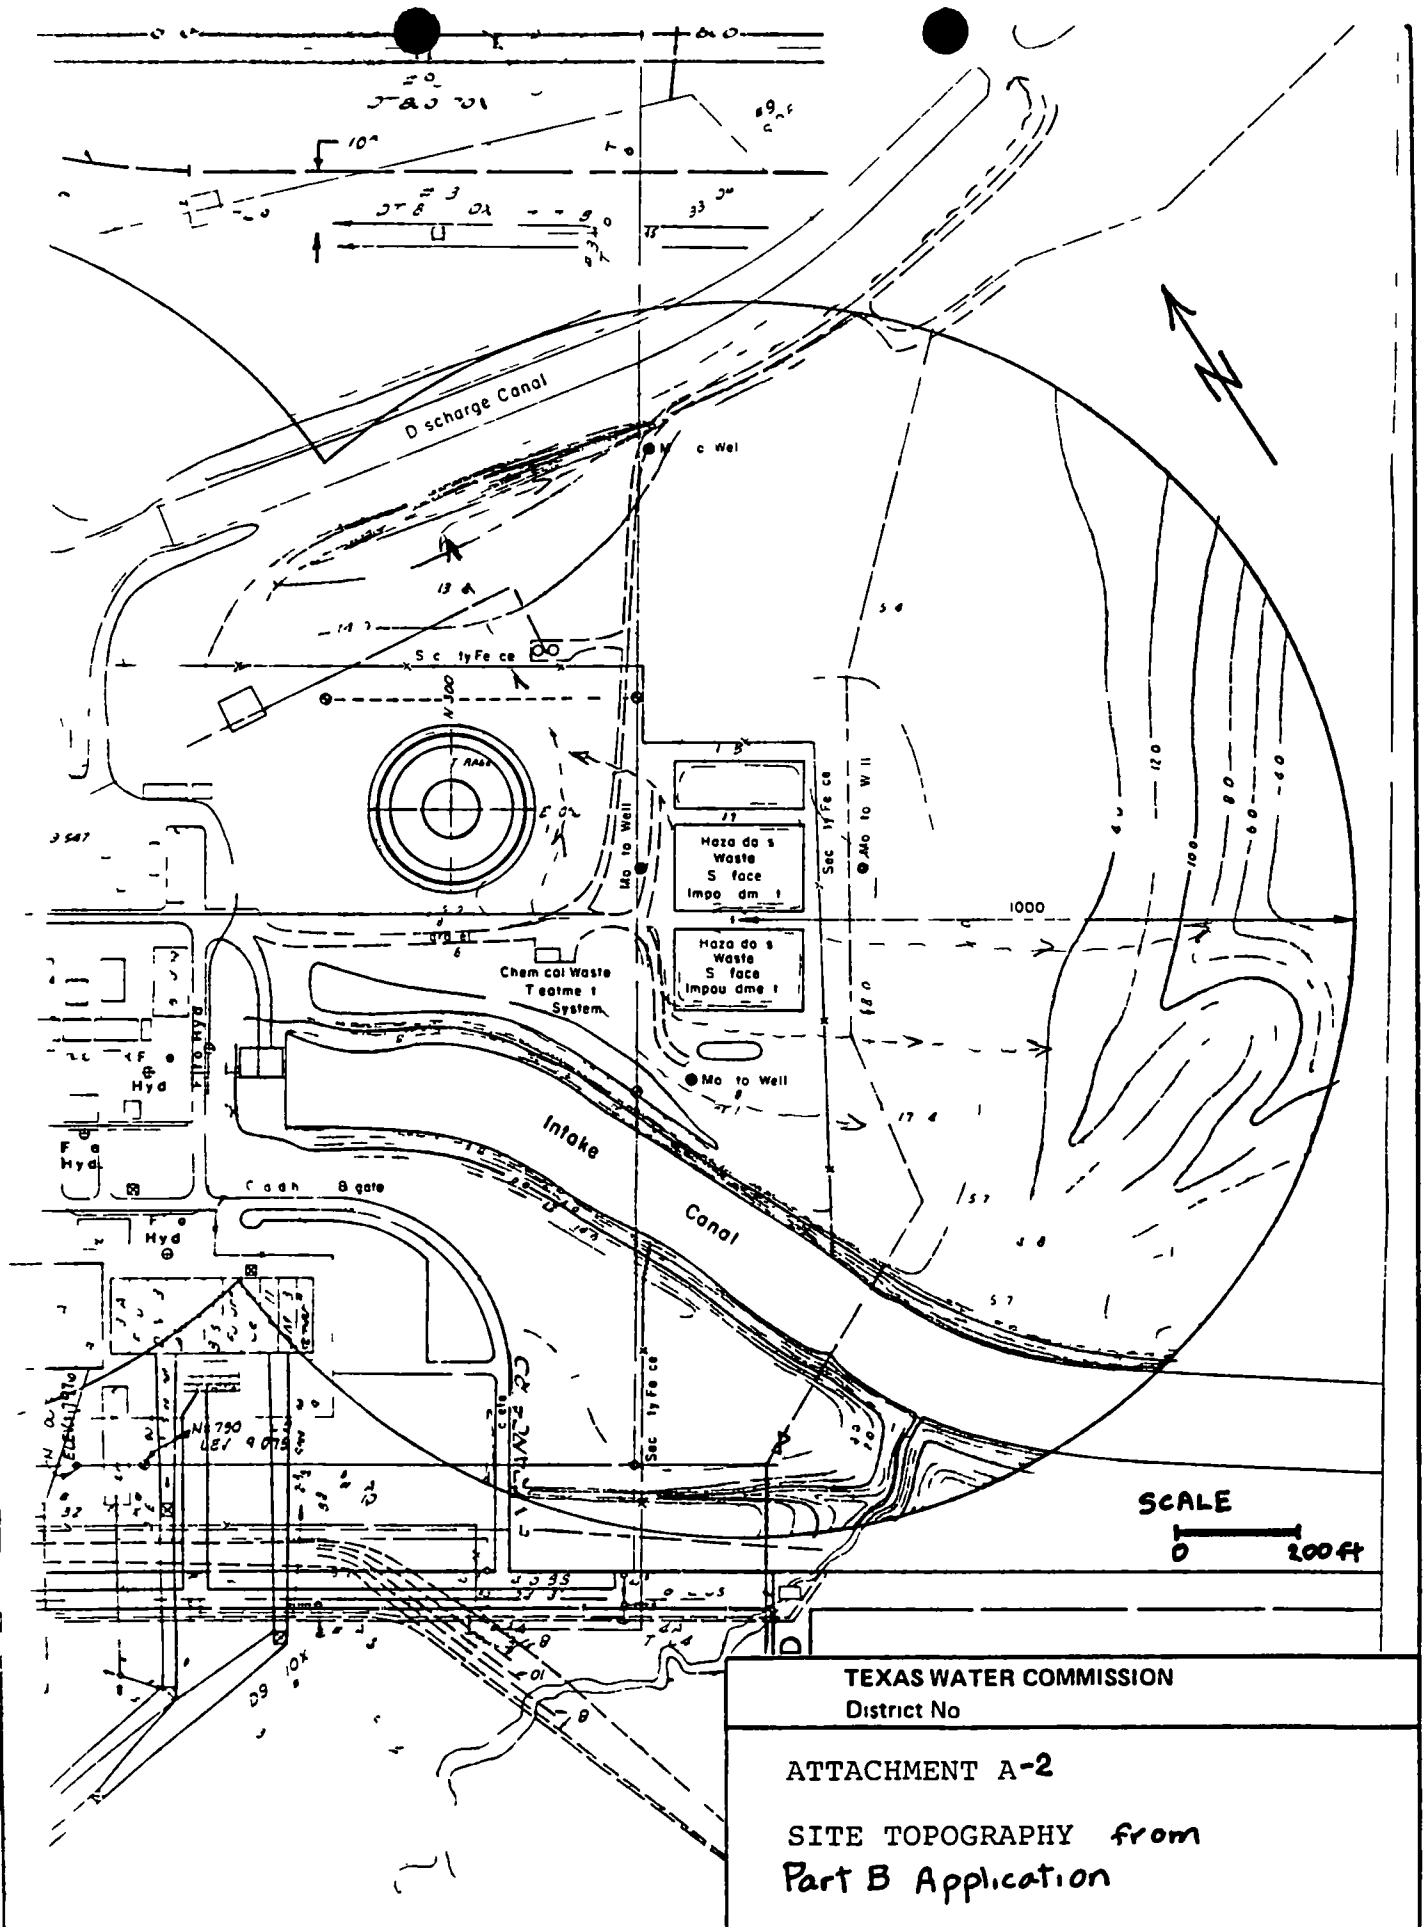

TEXAS WATER COMMISSION
District No

ATTACHMENT A-2

SITE TOPOGRAPHY from
Part B Application

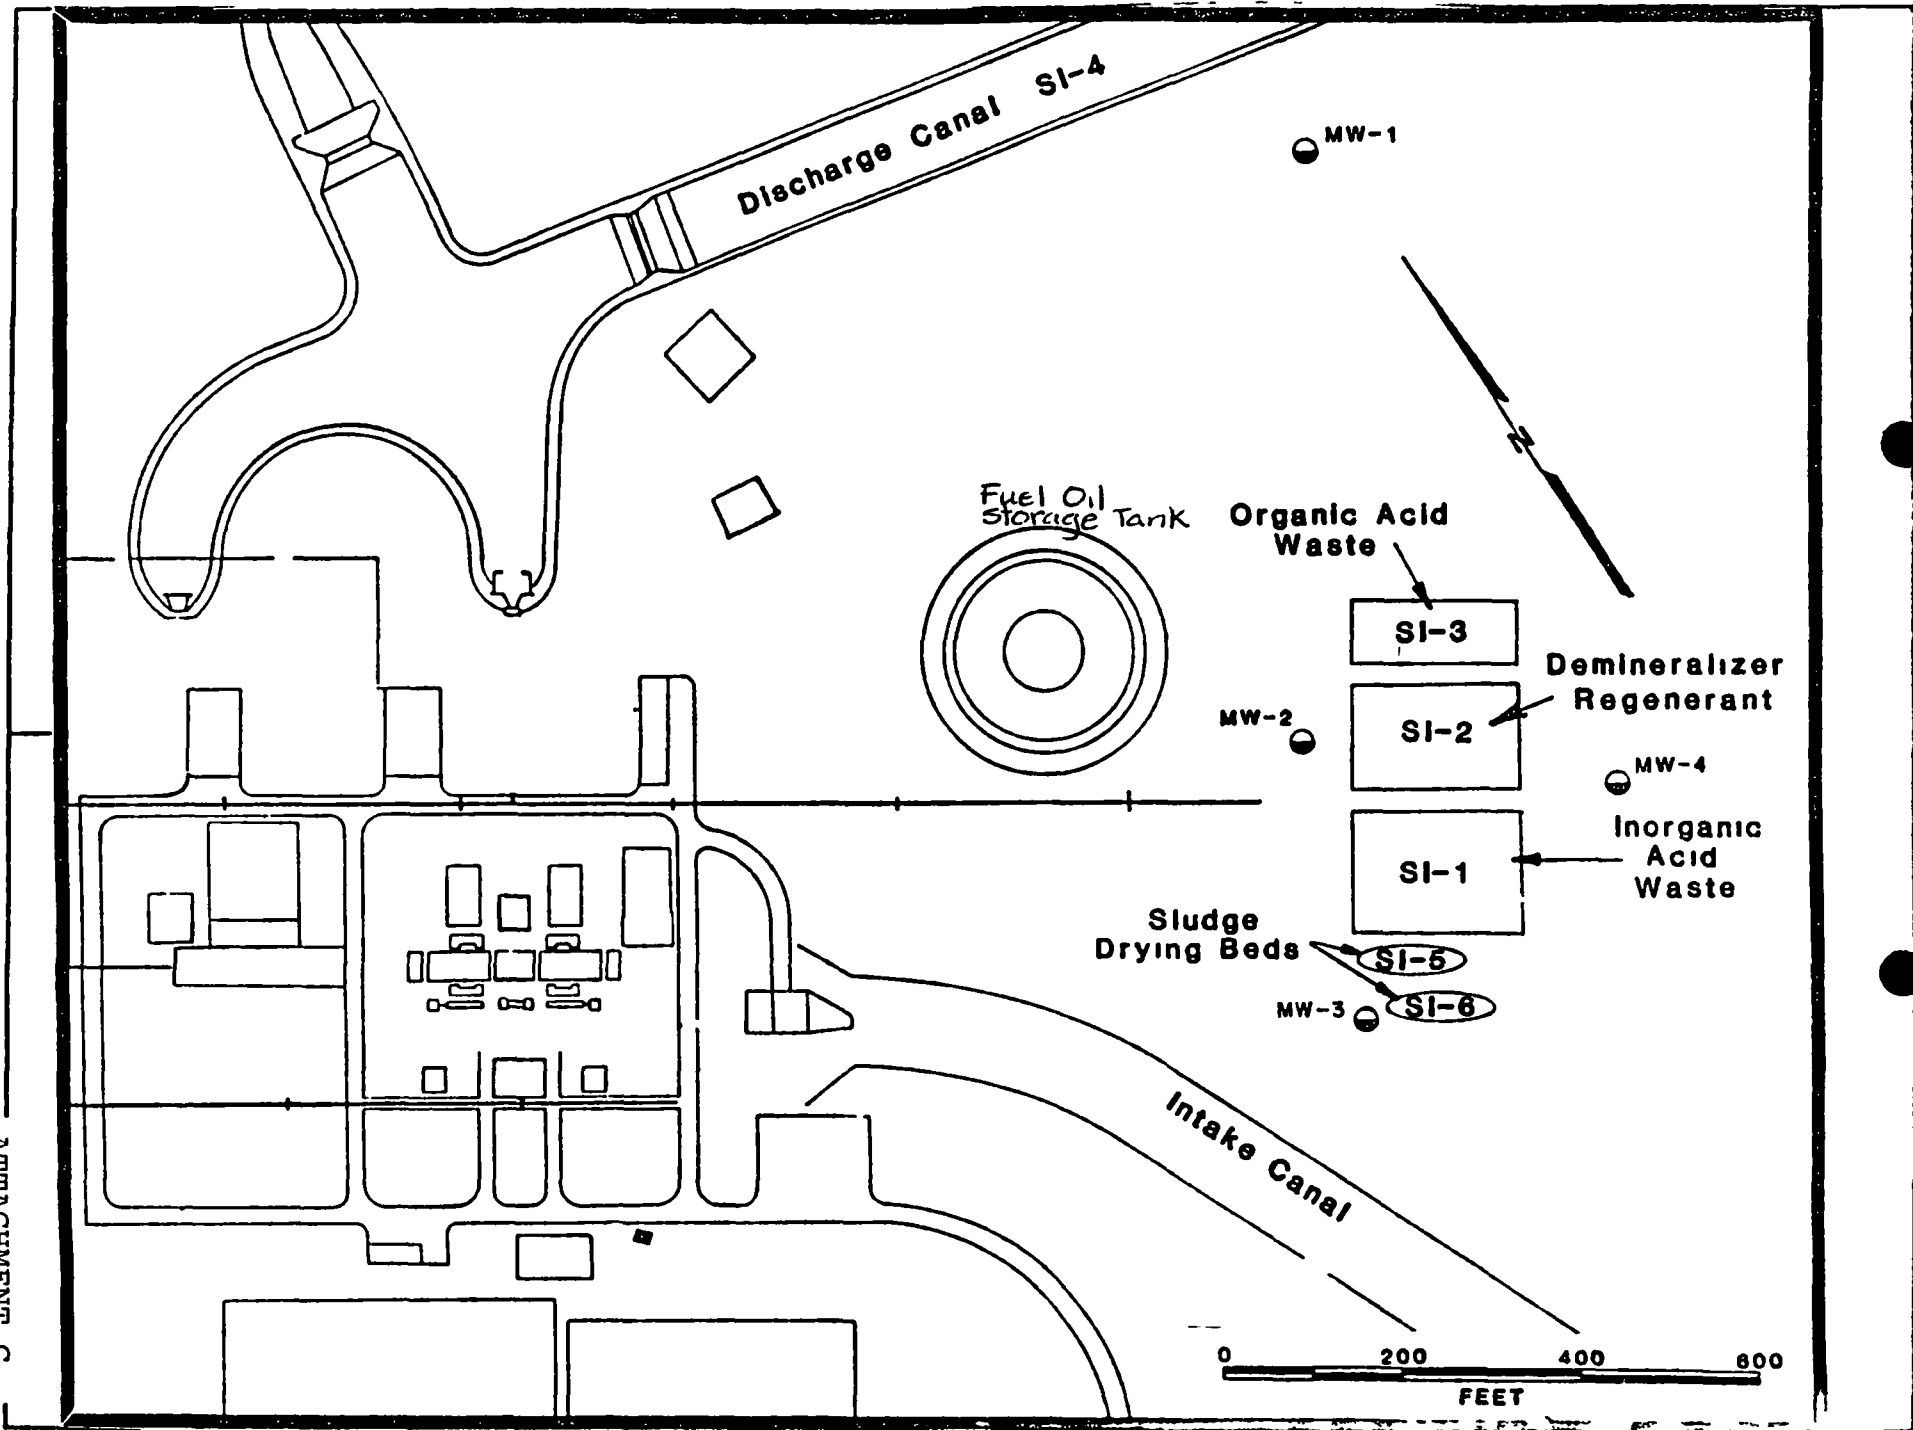

TWC Solid Waste Inspection Report

TWC Reg No 31633CLOSURE-in-PROGRESS CHECKLISTReg Facility No Type of facility component Surface Impoundments(2)


1. Is the facility component being closed a RCRA unit? YES ☒ NO ☐
2. Type of closure Full-Facility Closure ☒ Partial Closure ☐ ***
3. Has closure plan received TWC approval or final modification? N/A ☐ YES ☒ NO ☐
Date of approval August 6, 1985
Sept 25, 1986
4. Is this the last on-site facility to be closed which requires RCRA groundwater monitoring? N/A ☐ YES ☒ NO ☐
5. Has an approved public notice of closure been published? N/A ☐ YES ☒ NO ☐
Date published April 3, 1985
6. Is a public hearing required? YES ☐ NO ☒
Date of hearing N/A
7. Has on-site closure work started? YES ☒ NO ☐
Date work initiated June 17, 1986 (Demin)
Sept 19, 1985 (Inorg)
8. Is closure work proceeding according to the work schedule in the approved closure plan? N/A ☐ YES ☒ NO ☐
9. Have 180 days elapsed since TWC approval of the closure plan? N/A ☐ YES ☐ NO ☒
- a. If Yes,
Has TWC approved an extension period? N/A ☐ YES ☐ NO ☐
10. Was District Office notified of sampling event when complete removal (clean closure) of a Land Disposal facility was to have been accomplished? N/A ☐ YES ☒ NO ☐
11. Were TWC samples taken to verify completion of closure? YES ☒ NO ☐

NOTE List chain-of-custody sample tag numbers in comments.

TWC was available JW12329, 12328
12-23-86


12. Is the closure work completed? YES ☒ NO ☐
Date of completion Nov 1985
July 1, 1986
13. Has the closure certification been submitted to TWC? N/A ☐ YES ☒ NO ☐
Attach copy or explain. Date of certification September 2, 1986
Demin
Inorganic - Nov 1985

*** An entry in this column indicates explanation/response is needed

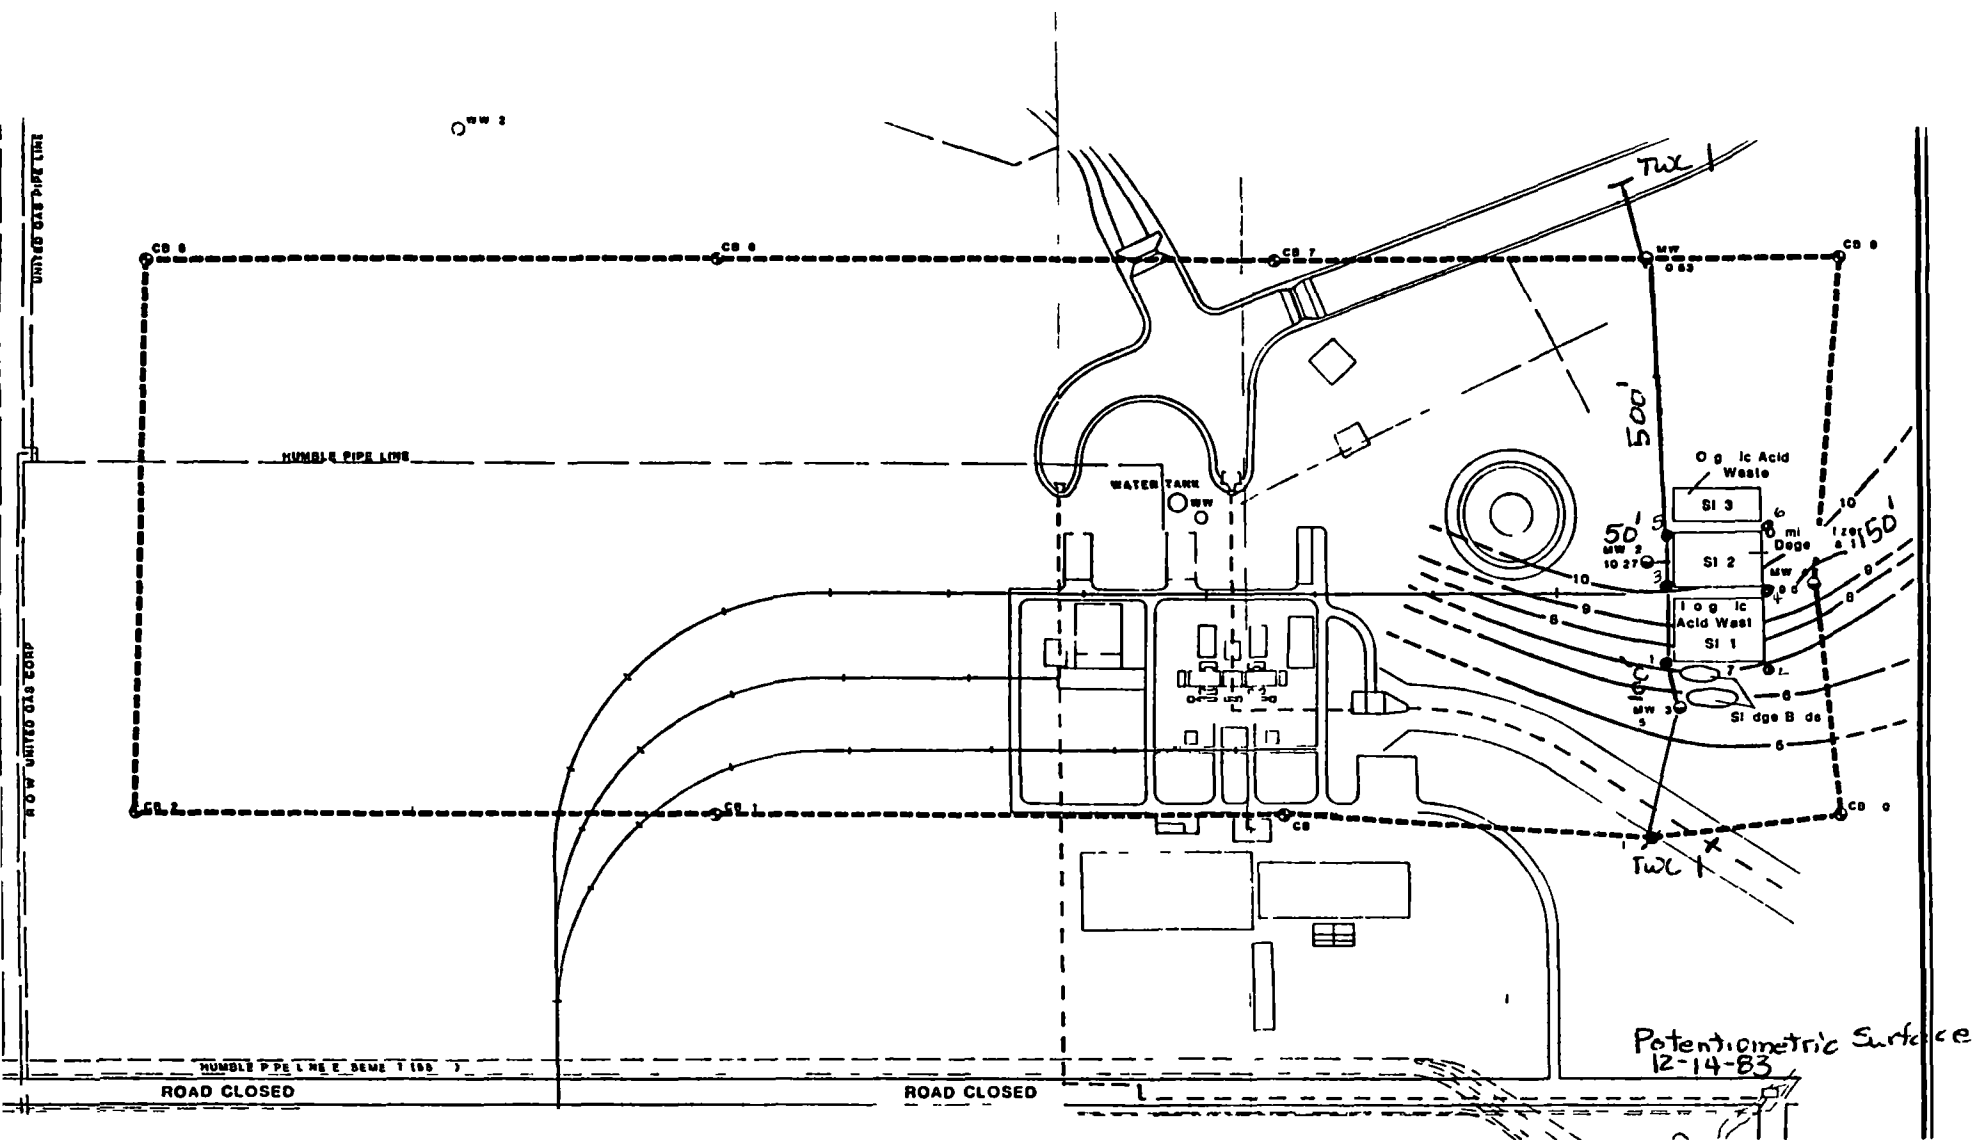

ATTACHMENT E


SITE DIAGRAM LOCATION
OF WELLS, BORINGS AND
CROSS SECTIONS

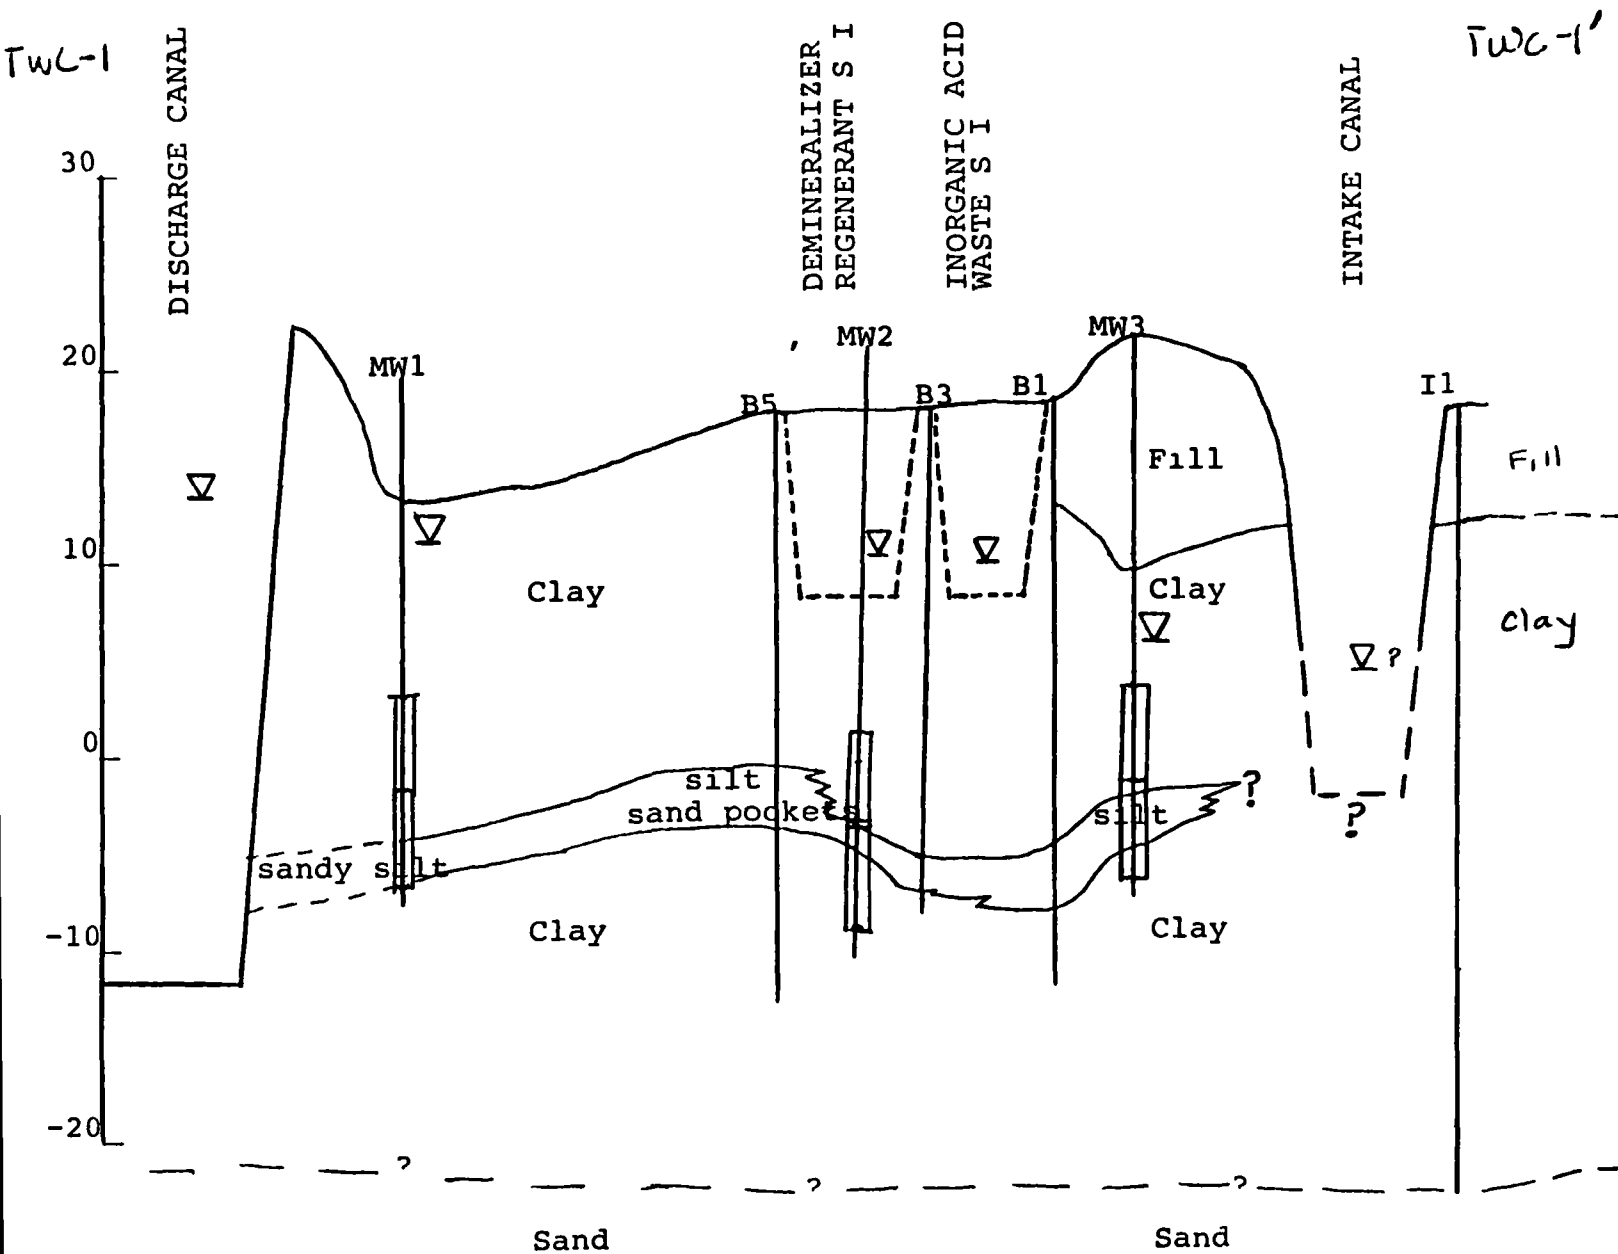

ATTACHMENT G

CROSS-SECTION SHOWING
MONITOR WELLS, BORINGS
LOCATIONS OF SURFACE
IMPOUNDMENTS AND CANAL

A of Disch ge 81 uatur

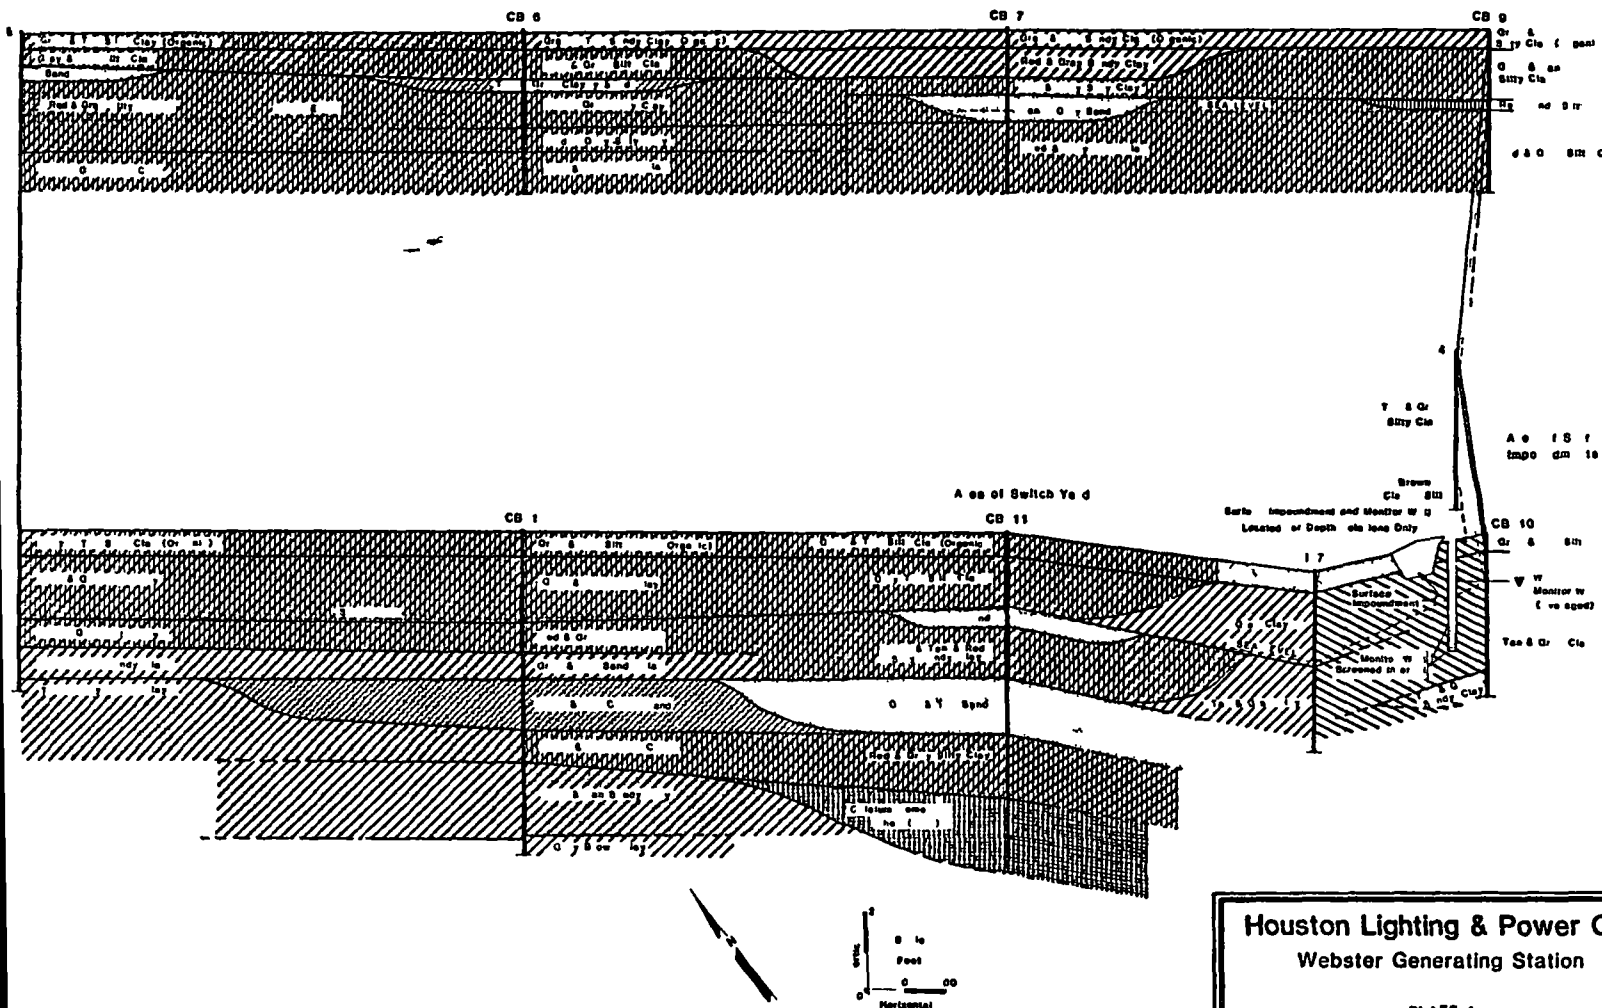

8. Imp. and ment Horizontal
Dimensions of 10 Scale

Houston Lighting & Power Co
Webster Generating Station


PLATE 1

LITHOLOGIC CROSS SECTION


Date Prepared: 2/8/

Prepared by
Underground Railroad Management Inc.
Austin, Texas

ATTACHMENT G
COMPANY CROSS_SECTION

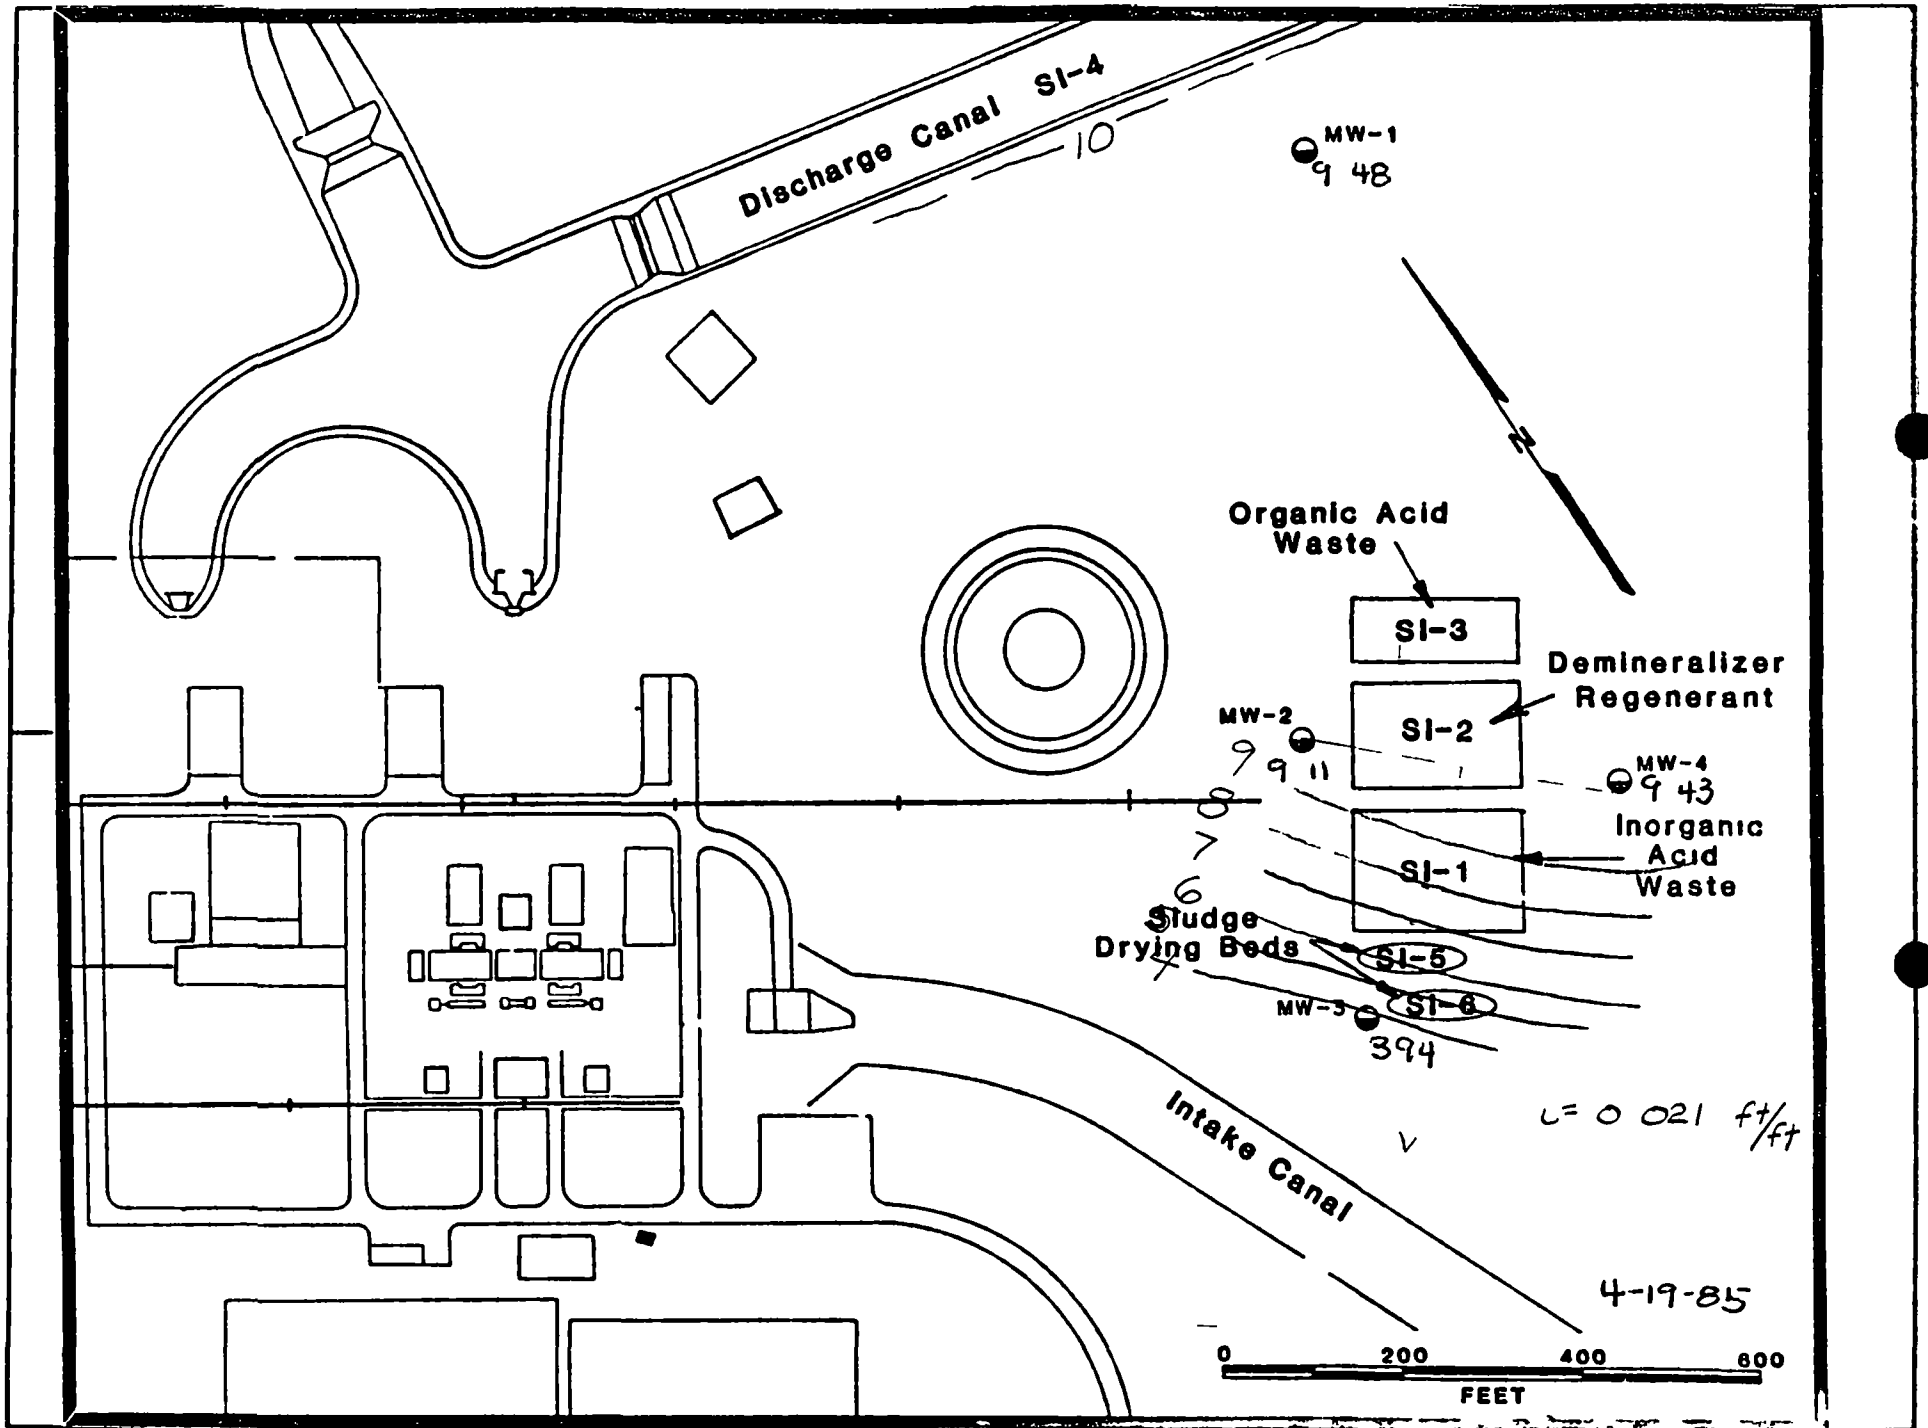

ATTACHMENT H
POTENTIOMETRIC SURFACE
MAP

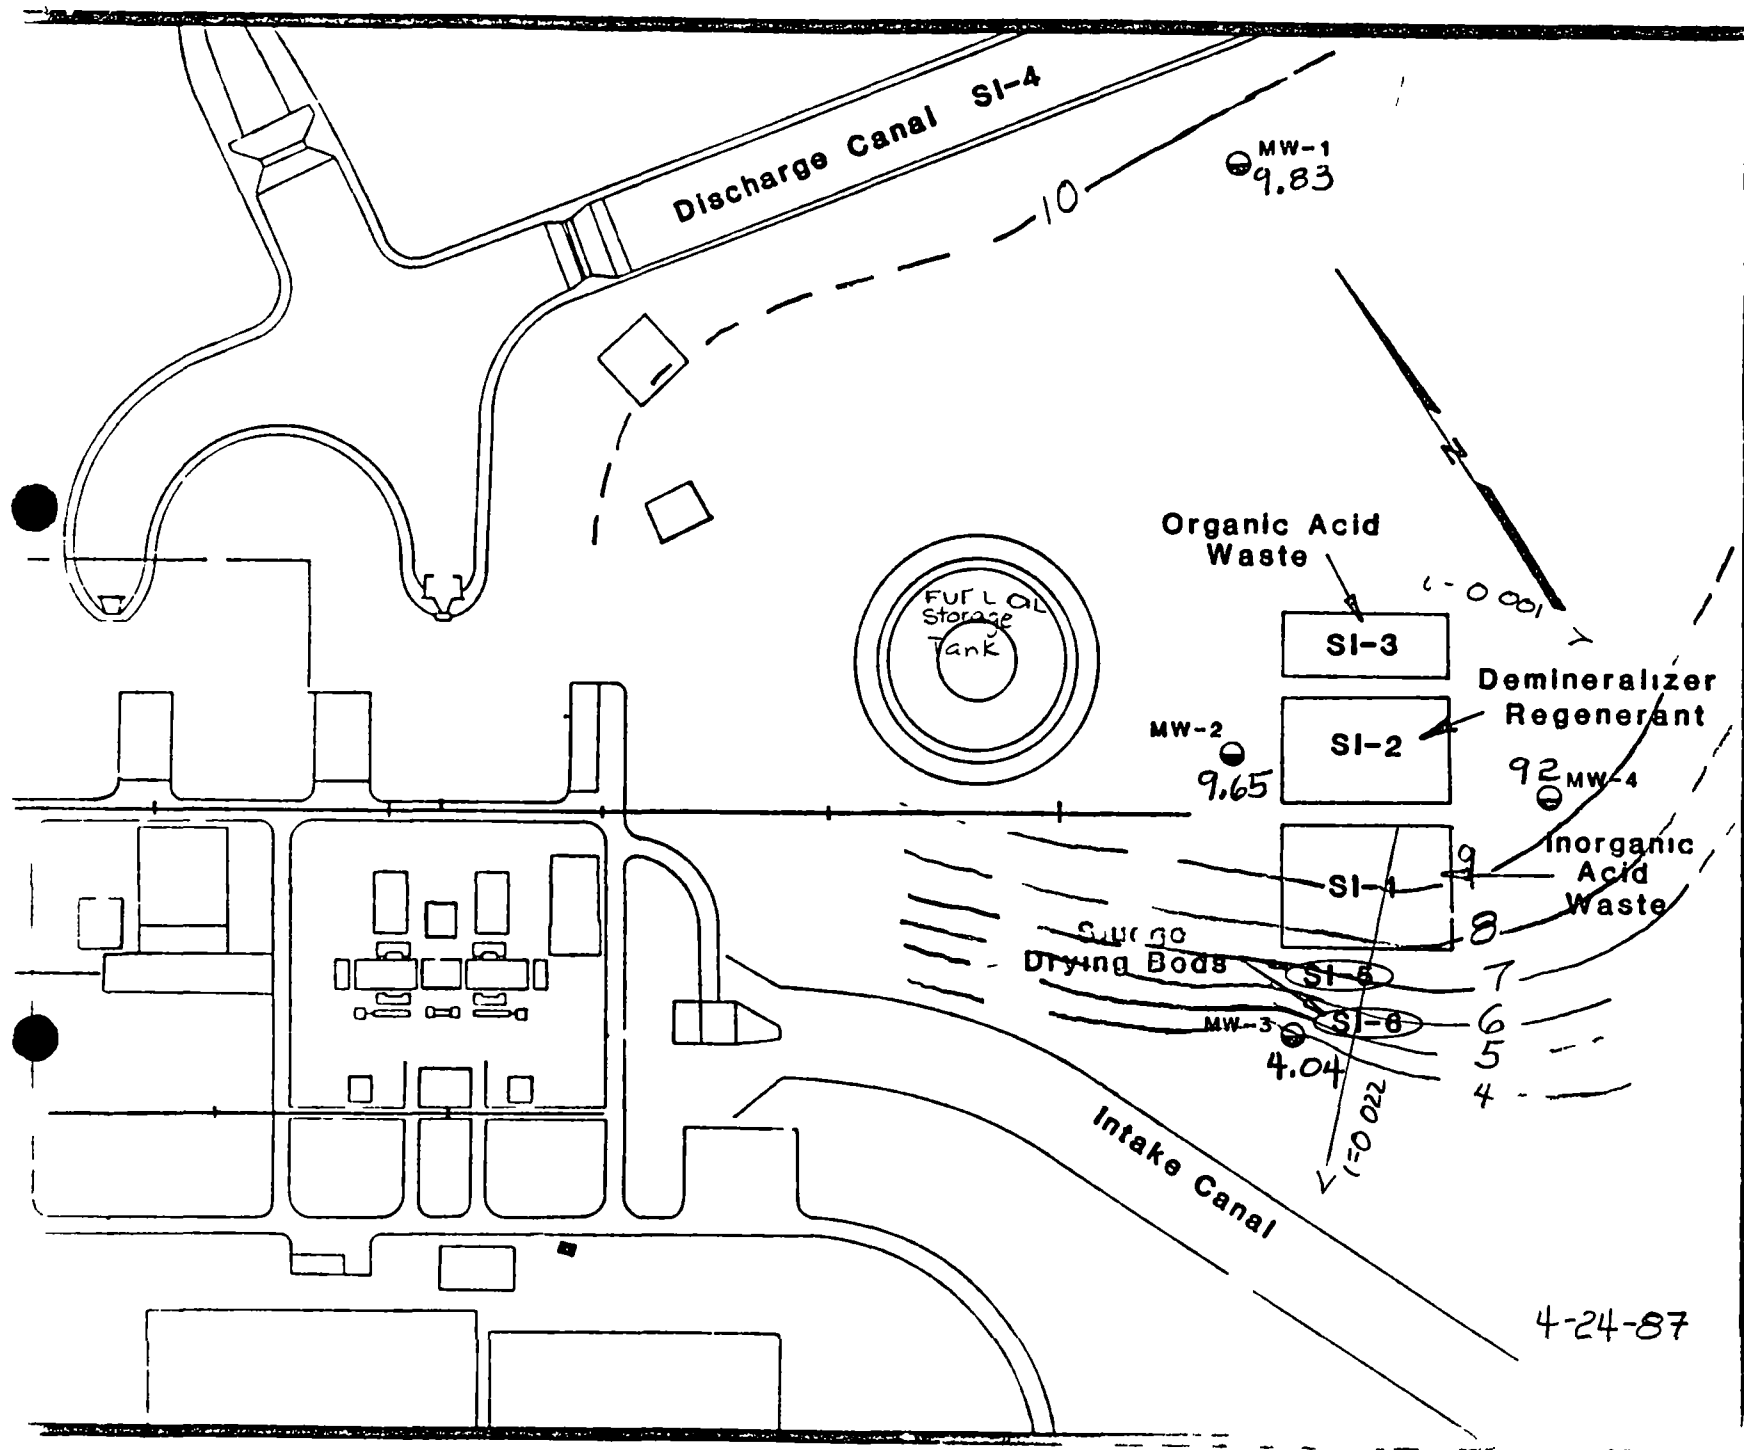

Calculations of Average Linear Velocity

Assumptions Let $K = 1.5 \times 10^{-4} \text{ cm/s}$ slug test in MW-2
 $\phi = 35\%$ porosity, from assumptions made in HL&P Part B for Gulf Coast clayey sediments

For $i = 0.001 \text{ ft/ft}$

Fudge Factor

$$V = \frac{K i}{\phi} = \frac{1.5 \times 10^{-4} \text{ cm/s}}{35} \times 0.001 \frac{\text{ft}}{\text{ft}} \times 1.0348 \times 10^6 \frac{\text{ft}}{\text{yr}} \frac{\text{cm}}{\text{s}}$$

$$V = 0.44 \text{ ft/yr}$$

For $i = 0.022 \text{ ft/ft}$

$$V = 9.75 \text{ ft/yr}$$

Assumptions Let $K = 2.7 \times 10^{-3} \text{ cm/s}$ slug test in MW-3
 $\phi = 35\%$ porosity

For $i = 0.001 \text{ ft/ft}$

$$V = 7.98 \text{ ft/yr}$$

For $i = 0.022 \text{ ft/ft}$

$$V = 175.6 \text{ ft/yr}$$

TEXAS WATER COMMISSION
 District No

ATTACHMENT I CALCULATIONS OF
 LINEAR VELOCITY



TABLE 7

Monitor Well Data
Webster Generating Station

<u>Measurement</u>	<u>Monitor Well No. 1</u>	<u>Monitor Well No. 2</u>	<u>Monitor Well No. 3</u>	<u>Monitor Well No. 4</u>
Location (Local Flow)	Updip	Downdip	Downdip	Downdip
Top of Casing Elevation (ft MSL)	19 48	21 11	21 94	21 43
Total Depth (ft)	21	28	29	28
Total Depth (ft MSL)	-1 52	-6 89	-7 06	-6 57
Screened Interval (ft below ground level)	15 - 20	22 - 27	23 - 28	22 - 27
Screened Interval (ft MSL)	4 48--0 52	-0 89--5 89	-1 06--6 06	-0 57--5 57
Static Water Level (12/17/83) (ft below casing point)	8 95	10 84	16 34	11 92
Static Water Level (12/17/83) (ft MSL)	10 53	10 27	5 6	9 51
Associated Surface Impoundments*	Discharge Channel	SI-2	SI-1	SI-1, SI-2, and SI-3
Surface Impoundment Water Levels (12/14/83) (ft MSL)	12 82	11 19	10 02	10 02/11 29/10 41

*See Figure 13 for Surface Impoundment Location

These may not be correct

File ITATWC Reg. No. 31600TEXAS WATER COMMISSION
Solid Waste Compliance Monitoring Inspection Report

C O Use Only

INSPECTION COVER SHEET

JAN 05 1987

C1-87 LLS

TWC Dist. 7EPA ID No. TXD000376COMMERCIAL WASTE Facility GOVT. Facility NAME OF COMPANY Houston Lighting & Power Website StationMAILING ADDRESS P.O. Box 1700 Houston 77001 Tel. (713) 922-2217SITE LOCATION 19301 Old Galveston Rd Tel. COUNTY Harris TYPE OF INDUSTRY electrical generating stationGENERATOR CLASSIFICATION Industrial ☒ Municipal Part A Application submitted to the State? Yes ☒ No To EPA? Yes ☒ No Affidavit of Exclusion submitted to the State? Yes ☒ No Was a written exclusion granted by TWC? Yes No ☒ If yes, Date Will this facility require a RCRA permit? Yes No ☒

CURRENT WASTE MANAGEMENT (Haz.-"H", Class I NonHaz -"NH", Class II-"II", Class III-"III")

Generator H, NH, II Treatment Storage Disposal Transporter HW Exemptions 90-Day Storage ☒ Other WWTSQG Total HW Generation Per Month <100 kg. 100-1000 kg. H W Facilities (circle appropriate codes) (C) T (SI) WP LT LP I TT TR WDW ON H Facilities (circle appropriate codes) (C) T (SI) WP LT LP I TT TR WDW OAnomalies in the above information will be addressed by (a) Enforcement in progress ,
(b) Central Office , (c) District Office ☒, (d) Owner/Operator .Type of Inspection (circle) EV EB EC CL GW (SA) CD FO OT FE SQ SWInspector's Name and Title Paula Thetford, Hazardous & Solid Waste SpecialistInspection Participants Barbara Dery - HLC, PDate(s) of Inspection 7-1-86Approved Shirley A. Parker for Signed Paula R. Thetford 10-21-86
District Manager TEK 4515 Inspector Date

TEXAS WATER COMMISSION
Solid Waste Inspection Report
CONTENTS SHEET

TWC Reg No _____

COMPANY NAME Little Lagoon, Inc. - Houston

- ☒ 1. Code Sheet (0814)
- ☒ 2. Inspection Cover Sheet ☐ 2b Special Insp Cover Sheet (HB.2358)
- ☐ 3. Generators Checklist ☐ 3b. Small Quantity Gen. Checklist
- ☐ 4 General Facilities Checklist
- ☐ 5 Transporters Checklist
- *6. Component Facility Checklists
- ☐ A. Containers (C)
 - ☐ B. Tanks (T)
 - ☐ C. Surface Impoundments (SI)
 - ☐ D. Waste Piles (WP)
 - ☐ E. Land Treatment (LT)
 - ☐ F. Landfills (LF)
 - ☐ G. Incinerators (I)
 - ☐ H. Thermal Treatment (TT)
 - ☐ I. Chemical, Physical, or Biological Treatment (TR)
 - ☐ J. Other (O)

- ☐ 7. Closure/Post-Closure Checklist ☐ 7b. Closure-In-Progress Checklist
- ☐ 8. Groundwater Monitoring Checklist Group
- ☐ 9. Notice of Violation (NOV) Letter
- ☐ 10. Interoffice Memorandum (IOM)
- ☐ 11. Registration
- ☐ 12. Maps, Plans, Sketches
- ☐ 13 Photographs/Slides

- ☒ 14. Other (describe) sample results from closure of
surface impoundment
- * If a required Checklist is omitted, explain Closure in Progress Checklist
has been previously submitted

Texas Water Commission

INTEROFFICE MEMORANDUM

TO Russ Kimble, Chief, Reports and Management Section, Hazardous and Solid Waste Division
THRU *gcl* Luis Campos, Hazardous & Solid Waste Coordinator, Field Operations Division
FROM Paula Thetford, Hazardous and Solid Waste Specialist, Deer Park Office
SUBJECT Houston Lighting & Power - Webster Station
ISW Reg No 31633

On July 1, 1986, a closure inspection was conducted at a surface impoundment at HL&P - Webster Station. Two composite samples were taken, the results of which are tabulated below.

SW 12329 pH=7.0

<u>EP-tox metals (ug/l)</u>	
Arsenic	11.5
Barium	326
Cadmium	18
Chromium	<8
Lead	<10
Mercury	0.2
Selenium	20.1
Silver	2

SW 12328 pH=7.6

<u>EP-tox metals (ug/l)</u>	
Arsenic	5.4
Barium	390
Cadmium	10
Chromium	16
Lead	12
Mercury	<0.2
Selenium	22.4
Silver	6

This information is provided for file data.

Signed

Paula B. Thetford

Approved

Russ Kimble

TK/PRT/amh

NO SW

12329

Site Name

HLP Webster Station

Site Location

19301 Old Galveston Rd

Webster 77001

County

Harris

Basin

1101

Method of Collection

The 3-part composite was ~~not~~ taken using a clean metal scoop to place the sample in an untreated glass jar w/a teflon liner

Facility

Demineralizer Regenerant

Boiler Blowdown Surface Impoundment - clay liner 18" beneath surface

Type facility ☐ Drum ☐ Tank ☒ Impoundment ☐ ☐ ☐☐ Vast pile ☐ Land arm ☐ Other

Tr Collected 11/30 (O) m Date Shipped

Add COC to

ODOP ☐ Yes ☒ No Describe

SW Registration										Permit Number										P eff										Date									
1 9 10 N/A										10 1 11 12 13 14										20																			
31633										3070186 E										Paula R. [Signature]																			
Code 35 Parameter Value										Code 43 Parameter Value										Code 44 Parameter Value																			
																				ID OPE																			

NO SW

12329

District

7

Org No

331

Work No

9091

Lab

TRA

Material Sampled ☐ Solid waste (W) ☐ Liquid waste (L) ☒ Soil (E) ☐ Well (M)☐ Stream (S) ☐ Other (O)

Comments: The sample was taken 18" beneath the surface of a 3-part composite

(continued on next)

Only Date	rec'd 7-3-86	86 3818-02 (Lab No)
	cr 5-28-86	
Analyst sign [Signature]		

Pre ion ☐ Nitrate ☐ Ice ☒ H₂SO₄ ☐ HNO₃

Chr

Auxiliary Tests

☒ LEACHATE ☒ EP Toxicity Series TDWR

30 Code	35 Parameter Value	44 Code	43 Parameter Value	58 Code	63 Parameter Value	71
pH	7.0	EP-tox series				
COD		ARSENIC EPTOX ug/L		LEAD EPTOX ug/L		
TOC		011002	11.5	011051		<1 C
GC/MS		BARIIUM EPTOX ug/L		MERCURY EPTOX ug/L		
		011007	326	71190		0.2
		CADMIUM EPTOX ug/L		SELENIUM EPTOX ug/L		
		011027	18	011147		20.1
		CHROMIUM EPTOX ug/L		SILVER EPTOX ug/L		
		011034	<8	011077		=

ODOR ☐ Yes ☒ No Describe _____

S W Registration										Permit Number										Page No				Date											
1										9										10				11											
3										1										6				33											
30										Code										35				Parameter Value											
44										Code										49				Parameter Value											
58										Code										63				Parameter Value											
ELD OPERAT																																			

Auxiliary Tags LEACHATE ✓ EP Toxicity Series TDWR

30	Code	35	Parameter Value	44	Code	49	Parameter Value	58	Code	63	Parameter Value
pH				EP-TOX SERIES				LEAD		EP TOX ug/l	
00403			7.6					01051			12
COD				BARIUM		EP TOX ug/l		MERCURY		EP TOX ug/l	
00340				01007			390	71900			<0.2
TOC				ARSENIC		EP TOX ug/l		SELENIUM		EP TOX ug/l	
00680				01002			5.4	01147			22.4
GC/MS				CADMIUM		EP TOX ug/l		SILVER		EP TOX ug/l	
				01027			10	01077			6
				CHROMIUM		EP TOX ug/l					
				01034			16				

JUL 21 1986

TEXAS WATER COMMISSION
Solid Waste Compliance Monitoring Inspection Report

C O Use Only

MATERIAL FIELD OFFICE

INSPECTION COVER SHEET

C 78

Gr 1

TWC Dist 7EPA ID No. TXD000837369COMMERCIAL WASTE Facility GOVT Facility NAME OF COMPANY Houston Lighting & Power - Webster StationMAILING ADDRESS PO Box 1700 - W F McGuirs Houston TX 77001 Tel (713) 922-2186SITE LOCATION 19301 Old Galveston Rd, Webster Tel COUNTY Harris TYPE OF INDUSTRY electrical generating stationGENERATOR CLASSIFICATION Industrial ☒ Municipal Part A Application submitted to the State Yes ☒ No In LPA Yes ☒ No Affidavit of Exclusion submitted to the State Yes No ☒Was a written exclusion granted by TWC? Yes No ☒ If yes, Date Will this facility require a permit? Yes No ☒

CURRENT WASTE MANAGEMENT (Haz -"H", Class I NonHaz -"NH", Class II-"II", Class III-"III")

Generator H, NH, II Treatment II Storage II, NH, II Disposal Transport HW Exemptions (check) 90-Day Storage ☒ Other W/L Treatment

(when facility closure is complete)

*SQG Total HW Generation Per Month <1000 kg 1000-10000 kg H W Facilities (circle appropriate codes) (C) (T) (SI) WP LT LF I TT TR WDW ON H Facilities (circle appropriate codes) (C) (T) (SI) WP LT LF I TT TR WDW OAnomalies in the above information will be addressed by (a) Enforcement in progress (b) Central Office , (c) District Office , (d) Owner/Operator Type of Inspection (circle) (EV) EB EC CL GW SA CD FO OT FE SQ JWInspector's Name and Title Paula Thetford, Hazardous & Solid Waste SpecialistInspection Participants Richard Bye, Barbara Dorf, Debbie Peters, Richard Pacham - HLCFDate(s) of Inspection 7/9/86Approved [Signature]
District ManagerSigned Paula R Thetford 7/14/86
Inspector (SA) Date

* SQG- small quantity generator, <1000 kg of hazardous waste per month

TEXAS WATER COMMISSION
Solid Waste Inspection Report
CONTENTS SHEET

TWC Reg No. 162-1

COMPANY NAME Houston Lighting & Power Webster

- ☒ 1 Code Sheet (MRIA)
- ☒ 2. Inspection Cover Sheet
- ☐ 3. Special Inspection Cover Sheet (HB 2358)
- ☒ 4 Generators Checklist
- ☐ 5 Small Quantity Generator Checklist
- ☒ 6 General Facilities Checklist
- *7 Component Facility Checklists
 - ☒ A Containers (C)
 - ☐ B Tanks (T) - part of the WW Treatment System
 - ☐ C Surface Impoundments (SI)
 - ☐ D. Waste Piles (WP)
 - ☐ E. Land Treatment (LT)
 - ☐ F Landfills (LF)
 - ☐ G Incinerators (I)
 - ☐ H. Thermal Treatment (TT)
 - ☐ I. Chemical, Physical, or Biological Treatment (TR)
 - ☐ J. Other (O)
- ☐ 8 Closure and Post-Closure Checklist ☐ Closure-In-Progress Checklist
- ☐ 9 Groundwater Monitoring Checklist
- ☒ 10 Notice of Violation (NOV) Letter
- ☐ 11 Interoffice Memorandum (IOM)
- ☐ 12 Registration
- ☒ 13. Maps, Plans, Sketches
- ☐ 14 Photographs/Slides
- ☐ 15 Other (describe)

* If a required Checklist is omitted, explain The groundwater monitoring checklist is omitted because groundwater monitoring will cease upon facility closure in 2-3 weeks, as stated and approved in the facility closure plan.

GENERATORS CHECKLIST**Section A - Notification and Waste Determination (335 6, 62, 63)**

- 1 Has generator completed an appropriate hazardous waste determination for each solid waste produced? YES ☒ NO ☐
- 2 Check the method used for determination
- a Listed as a hazardous waste in 40 CFR Part 261, Subpart D ☐
- b Process or materials knowledge ☒
- c Tested for characteristics as identified in 40 CFR Part 261, Subpart C (If equivalent test method is used, attach a copy) ☐

NOTE If a hazardous determination has not been made or appears to be incorrect, the inspector should obtain a sample of the waste for analysis and explain in comments

- 3 Has the facility received an EPA ID number? N/A ☐ YES ☒ NO ☐
- 4 Is notification of waste streams generated correct? YES ☒ NO ☐
- 5 Do all waste management (TSD) methods in use agree with Registration? YES ☐ NO ☒
- 6 Does this facility generate, treat, store, or dispose of PCB wastes? YES ☐ NO ☒
If yes, describe storage and disposition

- 7 Does this facility generate **used oils**? YES ☒ NO ☐
If yes, describe storage and disposition

Waste oils (Class I and II) are stored in a 500 gallon tank located in the container storage area.

- 8 Does this facility generate **spent solvents**? YES ☒ NO ☐
If yes, describe storage and disposition

Spent solvents are drummed and shipped to Rollins

- 9 Does this facility utilize **sumps** in the management of hazardous waste? YES ☐ NO ☒
If yes, describe use

*** An entry in this column indicates corrective action/response is needed

Section B - Special Conditions (335 75)

- 1 If generator has received from or transported to a **foreign** entity any hazardous waste, has the appropriate notice been filed with the EPA Regional Administrator? N/A ☒ YES ___ NO ___
- 2 Was the waste manifested and signed by the foreign consignee? N/A ☒ YES ___ NO ___
- 3 Has confirmation of waste transport out of the country been received by the generator? N/A ☒ YES ___ NO ___

Section C - Recordkeeping and Reporting (335 9, 10, 13, .70-71)

- 1 Does the generator maintain the following records and reports (if applicable) for the necessary three years?
- | | |
|---|--|
| a Shipping Manifests | N/A ___ YES <input checked="" type="checkbox"/> NO ___ |
| b Monthly off-site shipment summaries | N/A ___ YES <input checked="" type="checkbox"/> NO ___ |
| c Monthly on-site land disposal summaries | N/A <input checked="" type="checkbox"/> YES ___ NO ___ |
| d Monthly waste receipt summaries | N/A <input checked="" type="checkbox"/> YES ___ NO ___ |
| e Tests and analyses | N/A ___ YES <input checked="" type="checkbox"/> NO ___ |
| f Annual reports | N/A ___ YES <input checked="" type="checkbox"/> NO ___ |
- 2 Has generator submitted **exception reports** to TWC for any original (white) copies of manifests not received back? N/A ☒ YES ___ NO ___
- 3 Have any spills, unauthorized discharges or threats of such discharges occurred? YES ☒ NO ___
- If yes, have they been reported? (335.4, 453) N/A ___ YES ___ NO ☒
- Have they been remedied? (335 453) Explain *see comments* N/A ___ YES ☒ NO ___

+++ IF GENERATOR DISPOSES OF WASTES ON-SITE ONLY, WRITE N/A IN SECTION D+++

Section D - Pretransport and Manifest Requirements (335 61-68)

- 1 Identify primary off-site disposal facilities
BFI, Rollins
- 2 Are off-site disposal facilities permitted or operating under interim status standards? N/A ___ YES ☒ NO ___
- 3 Are TWC manifests properly completed? N/A ___ YES ☒ NO ___

+++ STOP & SIGN HERE IF FACILITY QUALIFIES AS A SMALL QUANTITY GENERATOR +++
Signed _____

Section D - (Continued)

- 4 Do containers used to hold waste(s) meet DOT packaging requirements (49 CFR Parts 173, 178, 179) before being offered for transport (if circumstances observed)? N/A ☒ YES ___ NO ___
- 5 Does generator label and mark each package in accordance with 49 CFR Part 172 (if circumstances observed)? N/A ☒ YES ___ NO ___
- 6 Is each container of 110 gallons or less marked with the required hazardous waste warning label? N/A ☒ YES ___ NO ___
There were no drums containing waste at the time of inspection
- 7 Does generator placard off-site waste shipments in accordance with DOT regulations (49 CFR Part 172, Subpart F)? N/A ☒ YES ___ NO ___
(if circumstances observed)

Section E - Accumulation Time Exemption (335.69)

Note A facility may accumulate and store hazardous wastes in containers or tanks for up to 90 days without a permit

- 1 Is the beginning date of Accumulation Time clearly indicated on each container? N/A ☒ YES ___ NO ___
- 2 Is each container or tank clearly labeled or marked with the words "Hazardous Waste"? N/A ☒ YES ___ NO ___
There were no drums containing wastes at the time of inspection

Note Attach a Container Storage Area Checklist for each container storage area

Note Attach a Tanks Checklist for each tank or each group of similar tanks

Note If this is a T/S/D Facility, proceed to General Facilities Checklist

COMMENTS SHEET

Section A 15 The boiler or industrial furnace (Facility No 03) is not being used to dispose of any wastes, and according to plant personnel, will not be used in the future. Also, two surface impoundments (Facilities No 01 and 02) are in the process of being closed.

Section C 13 During inspection of the manifests, it was found that approximately 150 cubic yards of sodium hydroxide contaminated material was removed from the plant site. According to plant personnel, a caustic line broke, spilling approximately 100 lbs of sodium hydroxide on the plant site. The sodium hydroxide contaminated material was soil removed from the area. This spill was not reported.

Section /

GENERAL FACILITIES CHECKLISTSection A - General Site Information

1. Are any solid waste facilities located in the 100-year floodplain? NO ☒ YES ☐ ***
- 2 Describe land use within one mile residential, commercial, rural
- 3 Are there any **closed** or **abandoned** solid waste facilities? NO ☐ YES ☐
two surface impoundments and the container storage area are in the process of being closed
- 4 Has proof of **deed recordation** of all on-site solid waste Land Disposal facilities been provided to TWC? N/A ☒ YES ☐ NO ☐
- 5 Are all solid waste facilities compliant with TAC **general prohibitions**? YES ☐ NO ☐

NOTE Attach Plant Map showing site orientation, waste management facilities, and major topographic features. Each facility component checklist should have a map or sketch attached.

+++ STOP & SIGN HERE IF THERE ARE NO RCRA FACILITIES ON-SITE +++
 Signed: _____

Section B - Personnel Training

1. Does the owner/operator maintain proper personnel training records at the facility? N/A ☐ YES ☒ NO ☐
- 2 Do personnel training records include
- a Job title and written job description of each position N/A ☐ YES ☒ NO ☐
 - b. Description of type and amount of training N/A ☐ YES ☒ NO ☐
 - c. Records of training given to facility personnel N/A ☐ YES ☒ NO ☐
- 3 Are personnel training records maintained for the appropriate length of time? N/A ☐ YES ☒ NO ☐
- 4 Is the training program adequate for response to emergencies? N/A ☐ YES ☒ NO ☐
A more detailed training program is being revised to include more emphasis on the container storage area

*** An entry in this column indicates explanation/response is needed.

Section C - Preparedness and Prevention

1. Describe any evidence of fire, explosion, or contamination of the environment in the comments sheet
2. Is the facility equipped with ***
- a. Internal communication or alarm system within easy access YES ☒ NO ☐
 - b. Communication system to call off-site emergency assistance YES ☒ NO ☐
 - c. Fire, spill control, and decontamination equipment YES ☒ NO ☐
 - d. Adequate fire-water supply (volume and pressure)
located around transformers and electrical equipment YES ☒ NO ☐
3. Is the above-noted emergency equipment regularly tested? YES ☒ NO ☐
Fire extinguishers checked monthly
sprinkler system checked annually
4. Is aisle space sufficient to allow unobstructed movement of personnel and equipment? YES ☒ NO ☐
5. Has the owner/operator attempted to familiarize local response authorities with the facility layout, entrances and evacuation routes, hazardous waste properties and hazards, and the work location of facility personnel? N/A ☐ YES ☐ NO ☒
6. If more than one law enforcement or fire department responds, has a **primary authority** been designated? N/A ☐ YES ☒ NO ☐
The plant is located in the city limits of Webster
7. Has the owner/operator attempted to reach agreements with State emergency response teams, emergency response contractors and equipment suppliers? N/A ☐ YES ☒ NO ☐
8. Has the owner/operator attempted to make arrangements with local hospitals to familiarize them with the hazardous wastes handled and the injuries that could result from fires, explosions, or releases from the facility? N/A ☐ YES ☐ NO ☒
9. If State or local authorities have declined to enter into the above-noted agreements, has the owner/operator documented this? N/A ☒ YES ☐ NO ☐ ^{on}

Section D - Contingency Plan and Emergency Procedures

1. Is a contingency plan to minimize dangers from accidental releases from hazardous waste facilities maintained on site? *See comments* YES ☒ NO ☐
2. Does the contingency plan contain
- a. Description of emergency response actions YES ☒ NO ☐
 - b. Names of emergency coordinators on-site or on-call YES ☒ NO ☐
 - c. Location of emergency equipment YES ☒ NO ☐
 - d. Evacuation plans YES ☒ NO ☐

+++ STOP & SIGN HERE IF FACILITY QUALIFIES FOR THE 90-DAY STORAGE EXEMPTION +++

Signed _____

The facility will be a 90 day storage exempt facility in 2-3 weeks upon certification of closure.

Section E - Waste Analysis

- 1 Is a **written waste analysis plan** maintained at the facility? YES ___ NO ___
- 2 Does the plan include the following
 - a. Detailed physical and chemical analysis of all haz. wastes YES ___ NO ___
 - b. Rationale for selection of analytical parameters YES ___ NO ___
 - c. Test methods used YES ___ NO ___
 - d. Sampling methods used YES ___ NO ___
 - e. Frequency the initial analysis will be reviewed or repeated YES ___ NO ___
 - f. Waste analyses that generators have agreed to provide N/A ___ YES ___ NO ___
- 3 For disposal facilities receiving wastes from off-site, is each incoming waste shipment inspected and, if necessary, analyzed to check it against the manifest? N/A ___ YES ___ NO ___

Section F - Security

1. Does the facility provide adequate security to minimize the possibility of unauthorized entry by persons or livestock? YES ___ NO ___
- 2 Is security of the active portion of the facility provided through
 - a. 24 Hr surveillance
or
 - b. Perimeter barriers and means to control entry YES ___ NO ___
3. Does facility post a "Danger-Unauthorized Personnel Keep Out" sign at approaches to active portions of the facility? YES ___ NO ___

Section G - General Inspection Requirements

- 1 Is a **written inspection schedule** maintained at the facility? N/A ☐ YES ☐ NO ☐
- 2 Does the schedule provide for inspection of the following
- | | | |
|---------------------------------------|------------------------------|-----------------------------|
| a. Monitoring equipment | YES <input type="checkbox"/> | NO <input type="checkbox"/> |
| b. Safety and emergency equipment | YES <input type="checkbox"/> | NO <input type="checkbox"/> |
| c. Security devices | YES <input type="checkbox"/> | NO <input type="checkbox"/> |
| d. Operating and structural equipment | YES <input type="checkbox"/> | NO <input type="checkbox"/> |
- 3 Does the schedule identify the following **types of problems** to be looked for during the inspection
- | | | |
|-------------------------------------|------------------------------|-----------------------------|
| a. Malfunction and deterioration | YES <input type="checkbox"/> | NO <input type="checkbox"/> |
| b. Operator error | YES <input type="checkbox"/> | NO <input type="checkbox"/> |
| c. Discharge or threat of discharge | YES <input type="checkbox"/> | NO <input type="checkbox"/> |
- 4 Does owner/operator maintain **inspection logs** which include
- | | | |
|---|------------------------------|-----------------------------|
| a. Date and time of inspection | YES <input type="checkbox"/> | NO <input type="checkbox"/> |
| b. Name of inspector | YES <input type="checkbox"/> | NO <input type="checkbox"/> |
| c. Notation of observation | YES <input type="checkbox"/> | NO <input type="checkbox"/> |
| d. Date and nature of repairs and remedial action | YES <input type="checkbox"/> | NO <input type="checkbox"/> |
5. Have malfunctions or other deficiencies noted in the inspection log been corrected? N/A ☐ YES ☐ NO ☐
- 6 Are **inspection log records** maintained for three years? YES ☐ NO ☐

Section H - Requirements for Ignitable, Reactive or Incompatible Wastes

1. Does owner/operator take precautions to prevent accidental ignition or reaction of ignitable or reactive wastes? N/A ☐ YES ☐ NO ☐
- 2 Are smoking and open flame confined to designated smoking areas? N/A ☐ YES ☐ NO ☐
3. Are "No Smoking" signs posted in areas with ignitable or reactive wastes? N/A ☐ YES ☐ NO ☐

Section I - Manifest System, Recordkeeping and Reporting

- 1 Does owner/operator comply with manifesting requirements? N/A ___ YES ___ NO ___
- 2 For wastes received from off-site
- a. Is waste transported by rail or water (bulk) accompanied by a properly executed shipping papers? N/A ___ YES ___ NO ___
- b. Have all shipments been consistent with the manifests? N/A ___ YES ___ NO ___
- c. Are unmanifested wastes reported to TWC? N/A ___ YES ___ NO ___
- d. Have manifest discrepancies been reconciled with the generator and transporter? N/A ___ YES ___ NO ___

Section J Operating Record

- 1 Is a **written operating record** maintained at the facility? N/A ___ YES ___ NO ___
- 2 Does the operating record reflects the following
- a. Description and quantity of each hazardous waste received and methods and date of treatment/storage/disposal at the facility N/A ___ YES ___ NO ___
- b. Location and quantity of each hazardous waste within the facility N/A ___ YES ___ NO ___
- c. Records and results of waste analyses and trial tests N/A ___ YES ___ NO ___
- d. Summary reports of all incidents requiring implementation of the Emergency Contingency Plan N/A ___ YES ___ NO ___
- e. **Closure Cost estimates** for all facilities. N/A ___ YES ___ NO ___
- f. **Post-Closure cost estimates** for all disposal facilities N/A ___ YES ___ NO ___

Section K - Financial Assurance

1. Did preinspection call to Central Office confirm that facility has submitted current financial assurance documentation? N/A ___ YES ___ NO ___
- 2 If Yes, indicate the documents submitted and their respective values
- | | | | | | | | |
|-----------------------------|--------|----|-------|-----------------|----|-------|--------|
| ___ Sudden Liability- | Amount | \$ | _____ | per occurrence, | \$ | _____ | annual |
| ___ Non-sudden Liability- | Amount | \$ | _____ | per occurrence, | \$ | _____ | annual |
| ___ Closure Assurance- | Amount | \$ | _____ | | | | |
| ___ Post-Closure Assurance- | Amount | \$ | _____ | | | | |
| ___ Corrective Action- | Amount | \$ | _____ | | | | |
3. Did Financial Assurance Officer report that documentation is adequate? N/A ___ YES ___ NO ___

COMMENTS SHEET

Section C 15.8, c 9. H&P personnel have not formally contacted local response authorities for the purpose of familiarizing them with the power plant. Arrangements have not been made to familiarize local hospitals with the hazardous wastes handled at the plant and possible injuries associated with the waste.

Section /

Section /

Section /

TWC Solid Waste Inspection Report
(TAC 335.241-247)
CONTAINER STORAGE AREA CHECKLIST

TWC Reg No 3/6-3

Reg Facility No 05

Class of waste (H/A/H)

NOTE TAC rules 335.241-247 apply to interim status and 90-Day Storage exempt facilities

1. Are containers in good condition? YES ☒ NO ☐
2. Are the containers compatible with the wastes being stored? YES ☒ NO ☐
3. Are containers kept closed and stored in a safe manner? YES ☒ NO ☐
4. Are containers inspected weekly for leakage and deterioration? YES ☒ NO ☐
5. Are containers holding **ignitable** or **reactive** wastes kept at least 15 meters (50 ft) from the facility's property line? N/A ☐ YES ☒ NO ☐
6. Are containers holding **incompatible** wastes separated by a physical barrier or sufficient distance? N/A ☒ YES ☐ NO ☐
7. Does the storage area have containment protection? YES ☐ NO ☒
8. Describe the Container Storage Area using comments sheet and/or photos

The container storage area recently underwent closure as a storage facility certification by a registered PE is pending. A 500-gallon tank containing the waste oils (Class I & II) is located in the container storage area, and is about 1/2 full. Also located in the area are 2 empty 55-gallon drums, one marked "waste solvent", and another to be removed from the area. Labeling and inspection requirements for containers to be held there in the future were discussed with H&P personnel.

*** An entry in this column indicates corrective action/response is needed

TEXAS WATER COMMISSION

Bolz MB
Lee RWC
Coloton 57

34599

Paul Hopkins Chairman
Lee B M Biggart Commissioner
Ralph Roming Commissioner



Larry R Soward Executive Director
Mary Ann Hefner Chief Clerk
James H Rourke Jr. General Counsel

April 4, 1986

14 July 86

J. C. H. H. H. H.

Mr Melvin G Warthan
Manufacturing, Supply and Distribution
Chemical Enterprises, Inc
8582 Katy Freeway, Suite 202
Houston, Texas 77024

Dear Mr Warthan.

Re The assessment of pesticide contamination at the
Chemical Enterprises, Inc, Odessa Facility
Solid Waste Registration No. 34599

The staff of the Enforcement Unit has reviewed the subject pesticide contamination assessment submitted with your letter of November 22, 1985. We note that this assessment satisfactorily sets out to measure the known area of contamination at the facility. The Texas Water Commission (TWC) approves the immediate implementation of the assessment with the following additions

- 1 Section I B of the assessment states that "a surface soil sample will be collected at each intersection of the grid lines." The Commission recommends that the first six inches of soil be removed prior to collecting a surface soil sample at each intersection of the grid lines
- 2 Section I.C of the assessment states that "two subsurface samples will be collected at depths of three feet and six feet at selected stations at each of the two landfills." The Commission recommends that Chemical Enterprises take subsurface samples at depths of one foot and two feet and take any additional deeper subsurface samples that may be necessary to adequately determine the extent of contamination
- 3 In addition to collecting subsurface samples at a depth of one foot at selected stations from the Playa Lake area on the plant side and from the Playa Lake east of the plant area, the TWC recommends that surface samples be collected at each grid point. If contamination is found at a depth of one foot, Chemical Enterprises should continue to collect deeper samples until background concentrations are reached

Mr Melvin G Warthan
Page 2

- 4 Submit an updated schedule for completion of the cleanup In addition, submit monthly status reports to the TWC outlining the cleanup progress

The Commission request that Chemical Enterprises, Inc, immediately implement the subject plan Please notify the TWC Central Office and TWC District Office of the implementation date

Should you have any questions or comments please do not hesitate to contact Ms Nancy J Bolz of my staff at 512/463-8564

Sincerely,

Merton J Coloton, P E , Chief
Hazardous and Solid Waste Enforcement Section
Hazardous and Solid Waste Division

NJB/da

cc Texas Water Commission District 10 Office
Dallas Cantwell, President, Chemical Enterprises
James Baker, Ph D , Rollins Environmental Services Inc
Darless Goolsby, Chemical Enterprises, Inc

TEXAS WATER COMMISSION



Paul Collins, Chairman
Ralph Roming, Commissioner
John O. Houchins, Commissioner

Earl R. Soward, Executive Director
Marc Ann Hofner, Chief Clerk
James K. Rourke, Jr., General Counsel

July 16, 1986

Mr. W. F. McGuire
Manager
Environmental Protection Department
Houston Lighting and Power
P. O. Box 1700
Houston, Texas 77001

Dear Mr. McGuire:

RE: Registration No. 31633-Webster Station Industrial Solid Waste Compliance Inspection

On July 9, 1986, Paula Thetford of this office conducted an industrial solid waste inspection of your facility. The following deficiencies were noted:

1. Texas Administrative Code (TAC), Section 335.6(c) - Notification Requirements

As discussed with your personnel, the Registration will need to be updated upon certification of closure of your waste management facilities. At this time please include any additional changes that should be made in order to accurately reflect current waste handling practices. A request to amend the registration should be sent to:

Texas Water Commission
Attention: Mr. Dick Martin
P. O. Box 13087
Austin, Texas 78711

2. TAC Section 335.112 - Preparedness and Prevention

Arrangements should be made to familiarize police and fire departments with the layout of the facility. Also, local hospitals should be made familiar with the hazardous wastes handled at the facility and the related injuries which could occur.

In addition, during inspection of your shipping manifests, it was found that 150 cubic yards of sodium hydroxide contaminated material was removed from your facility. Further discussion revealed that the contaminated material was soil contaminated by a recent spill of sodium hydroxide. Please be advised that the State of Texas Oil and Hazardous Substances Spill Contingency Plan, Section 2.2 requires immediate reporting of any spill of a hazardous substance to the TWC.

040550

TEXAS WATER COMMISSION
NOTICE OF REGISTRATION
INDUSTRIAL SOLID WASTE GENERATION/DISPOSAL

05-08-86

THIS IS NOT A PERMIT AND DOES NOT CONSTITUTE AUTHORIZATION OF ANY WASTE MANAGEMENT ACTIVITIES OR FACILITIES LISTED BELOW. REQUIREMENTS FOR SOLID WASTE MANAGEMENT ARE PROVIDED BY TEXAS ADMINISTRATIVE CODE SECTION 335 OF THE RULES OF THE TEXAS WATER COMMISSION (TWC). CHANGES OR ADDITIONS TO WASTE MANAGEMENT METHODS REFERRED TO IN THIS NOTICE REQUIRE WRITTEN NOTIFICATION TO THE TWC.

DATE OF NOTICE 05-09-86

REGISTRATION DATE 12-14-79

REGISTRATION NUMBER 31633

EPA I.D. NUMBER TX0000837369

THE REGISTRATION NUMBER PROVIDES ACCESS TO STORED INFORMATION PERTAINING TO YOUR OPERATION. PLEASE REFER TO THAT NUMBER IN ANY CORRESPONDENCE.

COMPANY NAME HOUSTON LIGHTING & POWER CO.
MAILING ADDRESS. WEBSTER GENERATING STATION
P O BOX 1700 - W.F.MCGUIRE
HOUSTON, TEXAS 77001

GENERATING SITE LOCATION
19301 OLD GALVESTON RD, WEBSTER, TX

CONTACT PERSON W F MCGUIRE

PHONE (713) 922-2186

NUMBER OF EMPLOYEES LESS THAN 100

TWC DISTRICT 07


REGISTRATION STATUS ACTIVE

REGISTRATION TYPE GENERATOR

HAZARDOUS WASTE STATUS GENERATOR/TSD FACILITY

I. WASTE GENERATED

WASTE NUMBER	DESCRIPTION	CLASS	CODE	DISPOSITION
001	OILS, WASTE	I	110450	ON-SITE / SOLD FOR RECOVERY/SECONDARY USE
002	MISC. INORGANIC SLUDGES	II	240540	OFF-SITE
003	ASBESTOS	I	170750	ON-SITE/OFF-SITE
004	BRICK, REFRACTORY (SPENT)	I	170300	ON-SITE/OFF-SITE
005	SOLVENTS, SPENT	IH	910100	ON-SITE / SOLD FOR RECOVERY/SECONDARY USE

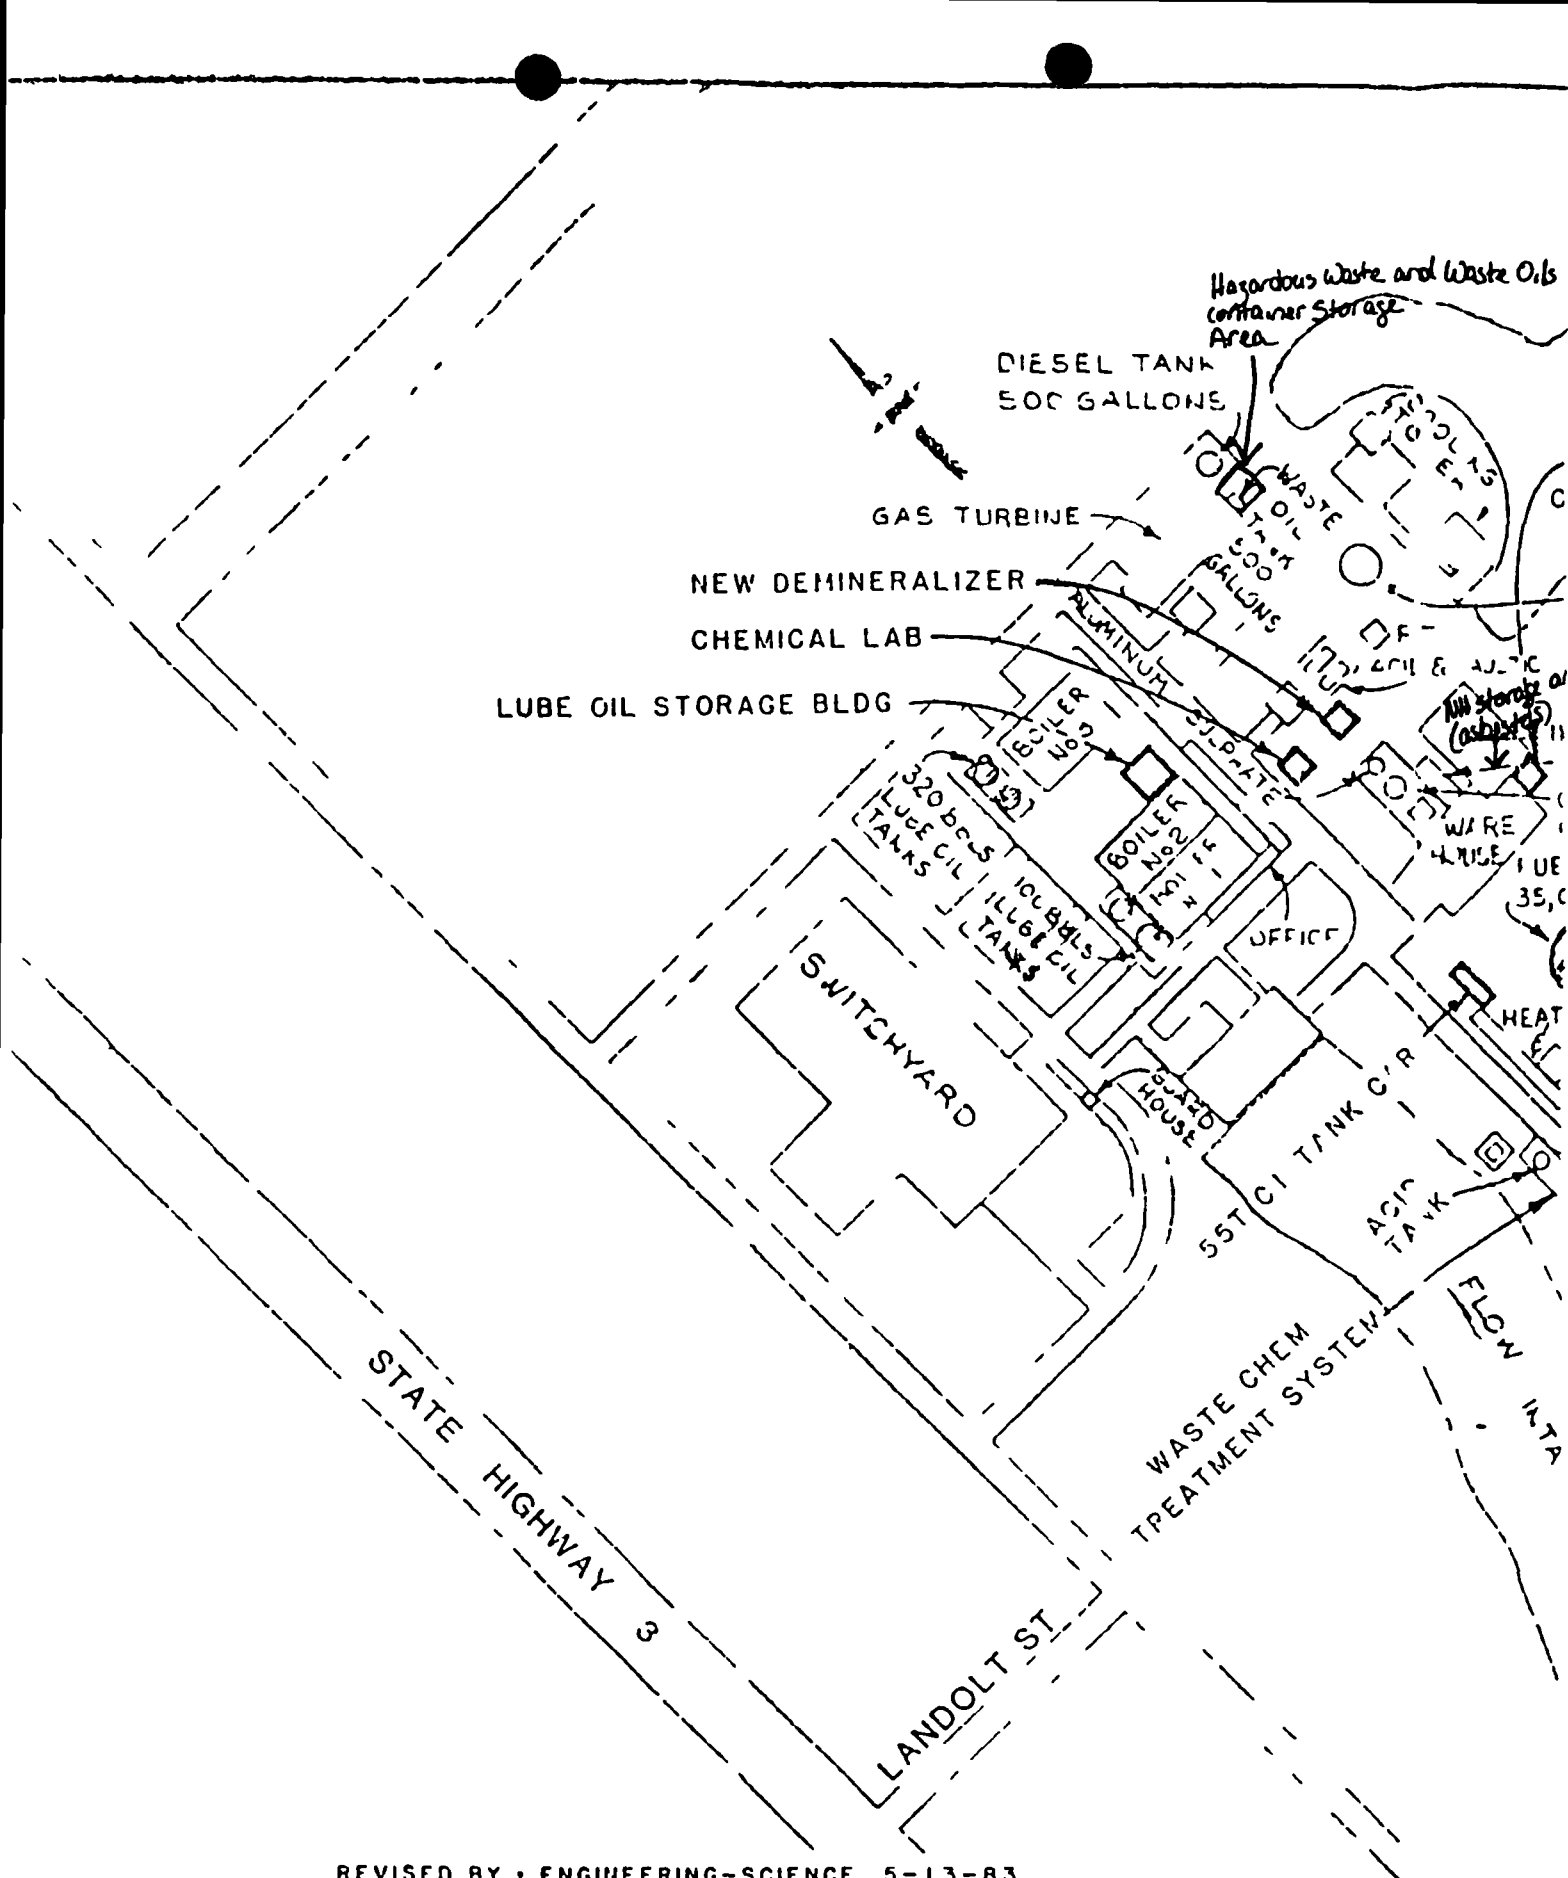


REVISED BY : ENGINEERING-SCIENCE 5-13-83


ENGINEERING-SCIENCE

DESIGN • RESEARCH • PLANNING

10915 EL CAMINO REAL HOUSTON TEXAS 77058 713/488 2944

OFFICES IN PRINCIPAL CITIES



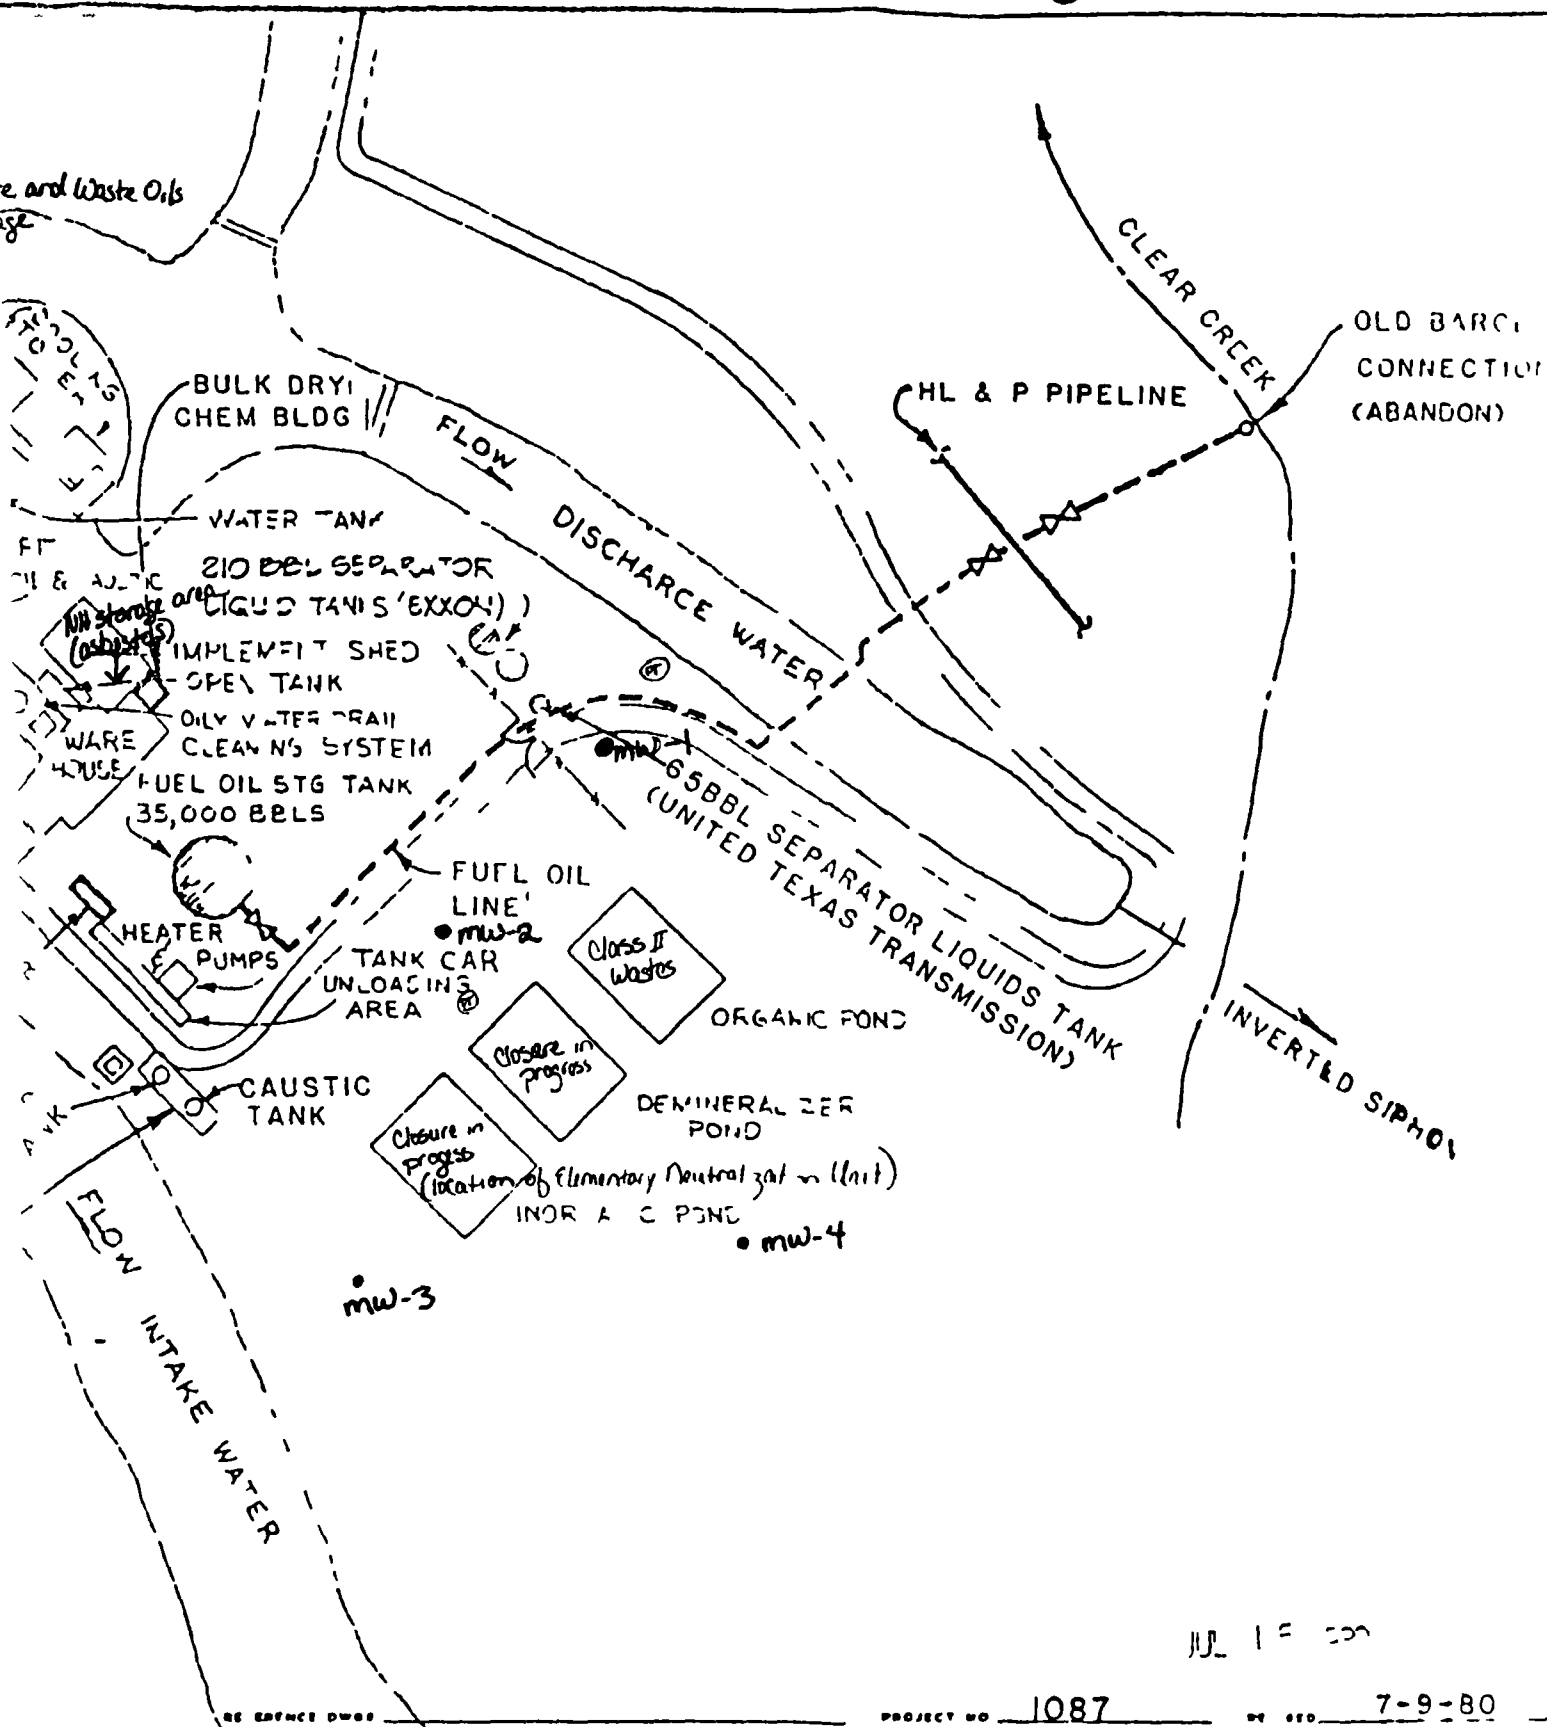

SEE REFERENCE DWG 001

PROJECT NO 1087

DATE 7-9-80


PIPE LINE TECHNOLOGISTS, INC.
HOUSTON TEXAS

HOUSTON LIGHTING & POWER COMPANY

WEBSTER PLANT SITE
PLOT PLAN

	DWG NO	CHECKED	APPROVED
•	GP		F E M
•	5 15 74		G E


	DWG NO
NONE	C - 868-4723



Mr W F McGuire
Houston Lighting & Power
Page 2,
July 16, 1986

Please respond to this office in writing by August 15, 1986 with your plans and implementation schedule which will ensure corrective action of the above listed deficiencies by September 15, 1986. If you have any questions, please contact Paula Thetford of this office

Sincerely,



Tom Kearns
Manager
Hazardous and Solid Waste
Southeast Region

TK/PT/np

E

EPA HAZARDOUS WASTE NOS. (REFER TO 40 CFR PART 261 FOR DESCRIPTIONS) D001

006 PAINT THINNER IH 910110 OFF-SITE

EPA HAZARDOUS WASTE NOS. (REFER TO 40 CFR PART 261 FOR DESCRIPTIONS). F003, F005

007 WASTEWATER, DEMINERALIZER ACID REGENERATION IH 902570 ON-SITE

EPA HAZARDOUS WASTE NOS. (REFER TO 40 CFR PART 261 FOR DESCRIPTIONS) D002

008 WASTEWATER, DEMINERALIZER BASE REGENERATION IH 902560 ON-SITE

EPA HAZARDOUS WASTE NOS. (REFER TO 40 CFR PART 261 FOR DESCRIPTIONS) D002

009 DEMINERALIZER REGENERANT SLUDGE II 241470 OFF-SITE

010 METAL CLEANING WASTE, INORGANIC C IH 903070 ON-SITE

EPA HAZARDOUS WASTE NOS. (REFER TO 40 CFR PART 261 FOR DESCRIPTIONS). D002

011 SLUDGE CONTAINING INORGANICS II 241210 OFF-SITE

012 METAL CLEANING WASTE, ORGANIC II 215290 ON-SITE/OFF-SITE

013 SLUDGE CONTAINING ORGANICS II 248990 OFF-SITE

014 OILS, WASTE II 210450 ON-SITE / SOLD FOR RECOVERY/SECONDARY USE

015 OILY WASTE, MISCELLANEOUS II 283230 ON-SITE/OFF-SITE

016 OILY WASTE, MISCELLANEOUS I 183230 ON-SITE/OFF-SITE

017 SODIUM HYDROXIDE CONTAMINATED MATERIAL IH 976330 OFF-SITE

EPA HAZARDOUS WASTE NOS. (REFER TO 40 CFR PART 261 FOR DESCRIPTIONS) D002

018 SANDBLASTING GRII IH 973280 OFF-SITE

EPA HAZARDOUS WASTE NOS. (REFER TO 40 CFR PART 261 FOR DESCRIPTIONS) D008

NOTICE OF REGISTRATION (CONTINUED)
REGISTRATION NUMBER 31633
COMPANY NAME HOUSTON LIGHTING & POWER CO.

PAGE 3

019 MERCURY CONTAMINATED WASTE IH 978850 OFF-SITE

EPA HAZARDOUS WASTE NOS. (REFER TO 40 CFR PART 261 FOR
DESCRIPTIONS) 0009

020 TANK BOTTOMS, FULL OIL I 152920 OFF-SITE/SECONDARY U
SE

021 SANDBLASTING GRIT II 273280 OFF-SITE

022 DEMINERALIZER RESIN BEADS, SPENT II 270131 OFF-SITE
T

023 FLUE DUST II 271430 OFF-SITE

024 ACID CONTAMINATED MATERIAL IH 979290 OFF-SITE

EPA HAZARDOUS WASTE NOS. (REFER TO 40 CFR PART 261 FOR
DESCRIPTIONS)

II. SHIPPING/REPORTING NOT APPLICABLE

III. ON-SITE WASTE MANAGEMENT FACILITIES

FAC NO.	FACILITY	STATUS
---------	----------	--------

01	SURFACE IMPOUNDMENT STORAGE OF WASTE NUMBER(S) 007, 008	ACTIVE Closure-in-progress
02	SURFACE IMPOUNDMENT STORAGE OF WASTE NUMBER(S) 010	ACTIVE Closure in progress
03	BOILER OR INDUSTRIAL FURNACE (ENERGY PRODUC PROCESSING/DISPOSAL OF WASTE NUMBER(S) 001, 005, 014	ACTIVE → now used
04	SURFACE IMPOUNDMENT STORAGE OF WASTE NUMBER(S) 012 - <i>Class II waste</i>	ACTIVE
05	MISCELLANEOUS STORAGE CONTAINERS STORAGE OF WASTE NUMBER(S) 001, 003, 004, 005, 006, 014, 015, 016	ACTIVE

UNLESS OTHERWISE STATED ABOVE, FACILITIES ARE LOCATED
AT 19301 OLD GALVESTON RD, WEBSTER, TX
COUNTY OF HARRIS

REGISTRATION NUMBER 31633

COMPANY NAME HOUSTON LIGHTING & POWER CO.

IV. RECORDS.

- A FOR PURPOSES OF FILING ANNUAL REPORTS PURSUANT TO TEXAS ADMINISTRATIVE CODE SECTION 335 OF THE RULES OF THE TWC PERTAINING TO INDUSTRIAL SOLID WASTE MANAGEMENT, RECORDS SHOULD BE MAINTAINED FOR STORAGE, PROCESSING AND/OR DISPOSAL OF THE FOLLOWING WASTE(S) LISTED IN PART I

C01 110450 OILS, WASTE

C03 170750 ASBESTOS

C04 170300 BRICK, REFRACTORY (SPENT)

C05 910100 SOLVENTS, SPENT

C07 902570 WASTEWATER, DEMINERALIZER ACID
REGENERATIONC08 902560 WASTEWATER, DEMINERALIZER BASE
REGENERATIONC10 903070 METAL CLEANING WASTE, INORGANI
C

C16 183230 OILY WASTE, MISCELLANEOUS

TWC Reg No 31633TEXAS WATER COMMISSION
Solid Waste Compliance Monitoring Inspection Report

INSPECTION COVER SHEET

C O U e Only

31633 LLS

51-16-112

EPA ID No TXD00037369 Commercial Waste Facility _____ Govt Facility _____NAME OF COMPANY Houston Lighting & Power Co - Webster StationMAILING ADDRESS PO Box 1700 - WF McGuire, Houston, TX 77001 Tel (713) 922-8216SITE LOCATION 19301 Old Galveston Rd, Webster Tel "COUNTY Harris TYPE OF INDUSTRY Electric Power Generation

Part A Application submitted to the State? Yes ☒ No ☐ To EPA? Yes ☒ No ☐
 Affidavit of Exclusion submitted to the State? Yes ☒ No ☐
 Was a written exclusion granted by TWC? Yes ☐ No ☒ If yes, Date _____
 Will this facility require a permit? Yes ☐ No ☒

Current Waste Management (Haz -H, Class I NonHaz -NH, Class II, III or check as appropriate)

Generator H, NH, II Treatment H Storage H, NH, II Disposal _____ Transporter _____HW Exemptions SQG _____ 90-Day Storage ☒ Other WW Treatment
enclosure activities are completeHW Facilities (circle appropriate codes) ☒ T ☒ SI ☐ LP ☐ LT ☐ LF ☐ I ☐ TT ☐ TR ☐ WDW ☐ ONH Facilities (circle appropriate codes) ☐ C ☐ T ☒ SI ☐ LP ☐ LT ☐ LF ☐ I ☐ TT ☐ TR ☐ WDW ☐ OAnomalies in the above information will be addressed by (a) Enforcement in progress _____,
 (b) Central Office ☒, (c) District Office _____, (d) Owner/Operator _____Inspection InformationType of Inspection (circle) IV EB IC ☒ CL GW SA CD FO OT FE SWInspector's Name and Title Karen L Blean - Hazardous & Solid Waste SpecialistInspection Participants Richard ByeInspection Date(s) October 13, 1985

Approved

[Signature]
District Manager

Signed

[Signature]
InspectorDate 12-12-85

FACILITY NAME Houston Lighting & Power Co - Webster Station

- ✓ 1 Code Sheet (0814)
- ✓ 2 Inspection Cover Sheet
- 3 Generators Checklist
- 4 Small Quantity Generator Checklist
- 5 General Facilities Checklist
- 6 Component Facility Checklists*
 - A Containers (C)
 - B Tanks (T)
 - C. Surface Impoundments (SI)
 - D Waste Piles (WP)
 - E Land Treatment (LT)
 - F. Landfills (LF)
 - G Incinerators (I)
 - H Thermal Treatment (TT)
 - I Chemical, Physical, or Biological Treatment (TR)
 - J Other (O) _____
- ✓ 6 ^{In-Progress} Closure and Post-Closure Checklist
- 7 Groundwater Monitoring Checklist
- 8 Notice of Violation (NOV) Letter
- 9 Interoffice Memorandum (ICM)
- ✓ 10 Registration
- 11 Maps, Plans, Sketches
- 12 Photographs/Slides
- ✓ 13 Other (describe) correspondence regarding closure

* If a required Checklist is omitted, explain _____

TWC Solid Waste Inspection Report
(40 CFR Part 261 Subpart G, Part 265 Subpart G)
CLOSURE-IN-PROGRESS CHECKLIST

TWC Reg No 31633
Reg Facility No 05

Note This checklist is to be completed if company is in the process of closing a hazardous waste management facility

- 1 Type of facility Container Storage Area
- 2 Has the closure plan received TWC approval or final modification? N/A ☐ YES ☒ NO ☐
Date of approval 09 / 23 / 85
- 3 Identify the type of closure Final Closure ☐
Partial Closure ☒
- 4 If this is a partial closure, is this the last facility to be closed requiring RCRA ground water monitoring? N/A ☐ YES ☐ NO ☒
- 5 If this is an interim status facility
- a Has an approved public notice of closure been published? N/A ☐ YES ☒ NO ☐
Date published 07 / 26 / 85
- b Is a public hearing required? N/A ☐ YES ☐ NO ☒
Date of hearing / /
- 6 Has on-site closure work started? N/A ☐ YES ☐ NO ☐
Date work initiated 10 / 18 / 85
- 7 Is the on-site closure work proceeding in accordance with the work schedule established in the approved closure plan? N/A ☐ YES ☒ NO ☐
- 8 Have 180 days elapsed since TWC approval of the closure plan? N/A ☐ YES ☐ NO ☒
a If yes, has the Executive Director approved a closure period of greater than 180 days? N/A ☒ YES ☐ NO ☐
- 9 Was District office notified of sampling event when complete removal of land facility was to have been accomplished? (not a land facility) N/A ☒ YES ☐ NO ☐
- 10 Were TWC samples taken during the inspection to verify completion of closure? N/A ☒ YES ☐ NO ☐

NOTE List chain-of-custody tag numbers in comments section

Checklist Closure in Progress

Date 12 12 83

Reg ~~Permit~~ No 31633

COMMENTS SHEET

Section _____ / Paragraph _____ The hazardous waste container storage area was closed according to the outlined closure plan. All containers in storage were disposed of at Rollins and the resulting cleaning materials and contaminated equipment were disposed of at BFI as class II wastes. HL&P will reopen the facility as a less-than 90 day storage facility. One hazardous waste impoundment has been closed, leaving one impoundment to be closed before HL&P-Webster will be exempt from needing a permit under the 90 day storage and wastewater treatment exemptions.

040551

TEXAS WATER COMMISSION
 OFFICE OF REGISTRATION

08-20-85

INDUSTRIAL SOLID WASTE GENERATION/DISPOSAL

THIS IS NOT A PERMIT AND DOES NOT CONSTITUTE AUTHORIZATION
 OF ANY WASTE MANAGEMENT ACTIVITIES OR FACILITIES LISTED
 BELOW. REQUIREMENTS FOR SOLID WASTE MANAGEMENT ARE PROVIDED
 BY TEXAS ADMINISTRATIVE CODE SECTION 335 OF THE RULES OF THE
 TEXAS WATER COMMISSION (TWC). CHANGES OR ADDITIONS TO WASTE
 MANAGEMENT METHODS REFERRED TO IN THIS NOTICE REQUIRE WRIT-
 TEN NOTIFICATION TO THE TWC.

DATE OF NOTICE 08-20-85

REGISTRATION DATE 12-14-79

REGISTRATION NUMBER 31673

EPA ID NUMBER TX00000837769

THE REGISTRATION NUMBER PROVIDES ACCESS TO STORED INFOR-
 MATION PERTAINING TO YOUR OPERATION. PLEASE REFER TO THAT
 NUMBER IN ANY CORRESPONDENCE.

COMPANY NAME HOUSTON LIGHTING & POWER CO
 MAILING ADDRESS WEBSTER GENERATING STATION
 P O BOX 1700 - W F MCQUIRE
 HOUSTON, TEXAS 77001

GENERATING SITE LOCATION
 17301 OLD GALVESTON RD, WEBSTER, TX

CONTACT PERSON W F MCQUIRE

PHONE (713) 922-2186

NUMBER OF EMPLOYEES 5 - 99

TWC DISTRICT 07

REGISTRATION STATUS ACTIVE

REGISTRATION TYPE GENERATOR

HAZARDOUS WASTE STATUS GENERATION/USE FACILITY

INDUSTRIAL WASTE GENERATED

WASTE NUMBER	DESCRIPTION	CLASS	CODE	DISPOSITION
001	OILS, WASTE	I	110400	ON-SITE / SOLD FOR RECOVERY/SECONDARY USE
002	MISC. INORGANIC SLUDGES	II	240540	OFF-SITE
003	ASBESTOS	I	170750	ON-SITE/OFF-SITE
004	BRICK, REFRACTORY (FEI)	I	171300	ON-SITE/OFF-SITE
005	SOLVENTS, SPENT	II	910100	ON-SITE / SOLD FOR RECOVERY/SECONDARY USE

EPA HAZARDOUS WASTE NOS (REFER TO 40 CFR PART 261 FOR DESCRIPTIONS) D001

006 PAINT THINNER IH 919110 OFF-SITE

EPA HAZARDOUS WASTE NOS (REFER TO 40 CFR PART 261 FOR DESCRIPTIONS) F003, F005

007 WASTEWATER, DEMINERALIZED ACID REGENERATION IH 902570 ON-SITE

EPA HAZARDOUS WASTE NOS (REFER TO 40 CFR PART 261 FOR DESCRIPTIONS) D002

008 WASTEWATER, DEMINERALIZED BASE REGENERATION IH 902560 ON-SITE

EPA HAZARDOUS WASTE NOS (REFER TO 40 CFR PART 261 FOR DESCRIPTIONS) D002

009 DEMINERALIZER REGENERANT SLUDGE II 241470 OFF-SITE

010 METAL CLEANING WASTE, INORGANIC C IH 903070 ON-SITE

EPA HAZARDOUS WASTE NOS (REFER TO 40 CFR PART 261 FOR DESCRIPTIONS) D002

011 SLUDGE CONTAINING INORGANICS II 241210 OFF-SITE

012 METAL CLEANING WASTE, ORGANIC II 215290 ON-SITE/OFF-SITE

013 SLUDGE CONTAINING ORGANICS II 249900 OFF-SITE

014 OILS, WASTE II 210450 ON-SITE / SOLD FOR RECOVERY/SECONDARY USE

015 OILY WASTE, MISCELLANEOUS II 283230 ON-SITE/OFF-SITE

016 OILY WASTE, MISCELLANEOUS I 187230 ON-SITE/OFF-SITE

017 SODIUM HYDROXIDE CONTAMINATED MATERIAL IH 976330 NO LONGER GENERATED

EPA HAZARDOUS WASTE NOS (REFER TO 40 CFR PART 261 FOR DESCRIPTIONS) D002

018 SANDBLASTING GRIT IH 973280 OFF-SITE

EPA HAZARDOUS WASTE NOS (REFER TO 40 CFR PART 261 FOR DESCRIPTIONS) D006

019 MERCURY CONTAMINATED WASTE 4 978850 OFF-SITE
 EPA HAZARDOUS WASTE NOS (REFER TO 40 CFR PART 261 FOR
 DESCRIPTIONS) 0109
 020 TANK BOTTOMS, FUEL OIL I 152920 OFF-SITE/STORAGE, U
 IL
 021 SANDBLASTING GRIT II 273780 OFF-SITE

II SHIPPING/REPORTING PURSUANT TO TEXAS ADMINISTRATIVE CODE
 SECTION 335 OF THE RULES OF THE TDC PERTAINING TO INDUSTRIAL SOLID
 WASTE MANAGEMENT, ISSUANCE OF MANIFESTS AND MONTHLY REPORTING ARE
 REQUIRED FOR OFF-SITE STORAGE/PROCESSING/DISPOSAL OF THE FOLLOWING
 CLASS 1 WASTES LISTED IN PART 1

PREPARE A MONTHLY WASTE SHIPMENT SUMMARY AND SUBMIT IT ALONG WITH
 THE GIVEN COPY OF THE MANIFEST(S) FOR EACH MONTH THAT
 SHIPMENTS OF THE FOLLOWING WASTE(S) ARE MADE. NO MONTHLY
 WASTE SHIPMENT SUMMARY IS REQUIRED FOR MONTHS WHEN SHIPMENTS
 ARE NOT MADE.

007 170750 ASBESTOS
 004 171300 BRICK, REFRACTORY (SPENT)
 006 10110 PAINT THINNER
 010 183230 OILY WASTE, MISCELLANEOUS
 010 273780 SANDBLASTING GRIT
 010 978850 MERCURY CONTAMINATED WASTE
 020 152920 TANK BOTTOMS, FUEL OIL

III OFF-SITE WASTE MANAGEMENT FACILITIES

FAC	0	FACILITY	STATUS
01		SURFACE IMPONEMENT STORAGE OF WASTE NUMBER(S) 007, 009	ACTIVE
02		SURFACE IMPONEMENT STORAGE OF WASTE NUMBER(S) 010	ACTIVE
03		BOILER OR INDUSTRIAL FURNACE (ENERGY PRODUCE PROCESSING/DISPOSAL OF WASTE NUMBER(S) 001, 005, 014	ACTIVE

- 04 SURFACE INFILTRATION STORAGE ACTIVE
OF WASTE NUMBER(S) 012
- 05 MISCELLANEOUS STORAGE CONTAINERS ACTIVE
STORAGE
OF WASTE NUMBER(S) 001, 003, 004, 005, 006, 014,
015, 016

UNLESS OTHERWISE STATED ABOVE, FACILITIES ARE LOCATED
AT 19301 OLD GALVESTON RD, WEBSTER, TX
COUNTY OF HARRIS

IV RECORDS

- A FOR PURPOSES OF FILING ANNUAL REPORTS PURSUANT TO TEXAS
ADMINISTRATIVE CODE SECTION 335 OF THE RULES OF THE TWC
PERTAINING TO INDUSTRIAL SOLID WASTE MANAGEMENT, RECORDS
SHOULD BE MAINTAINED FOR STORAGE, PROCESSING AND/OR DISPOSAL
OF THE FOLLOWING WASTE(S) LISTED IN PART I

- 001 110450 OILS, WASTE
- 003 170750 ASBESTOS
- 004 170300 BRICK, REFRACTORY (SPENT)
- 005 910100 SOLVENTS, SPENT
- 007 902570 WASTEWATER, DEMINERALIZER ACID
REGENERATION
- 008 902560 WASTEWATER, DEMINERALIZER BASE
REGENERATION
- 010 903070 METAL CLEANING WASTE, INORGANIC
- 016 183230 OILY WASTE, MISCELLANEOUS

Mr Jay Snow
May 13, 1985
Page 2

P. H. Robinson

Closure plans for three hazardous waste surface impoundments have been submitted to TDWR. Upon final approval, closure activities are scheduled to begin in the summer of 1985

Webster


Closure plans for two hazardous waste surface impoundments have been submitted to TDWR. Upon final approval, closure activities are scheduled to begin in the summer of 1985.

T. H. Wharton

The inorganic metal cleaning impoundment has been closed under a TDWR-approved closure plan. After completion of a fiberglass-lined concrete tank, the demineralizer regenerant impoundment will be closed and an affidavit of exclusion from hazardous waste permitting will be submitted

Should you have any questions pursuant to these container storage area closure plans, please contact Mr R T Bye at 922-2201

Sincerely,



for

W. F. McGuire, Manager
Environmental Protection Dept.

RDG/rmr
Attachments

The Light company

Houston Lighting, N.E. 1st St. Box 1700 Houston, Texas 77001 (713) 225-9111

REC

5/20/85

May 13, 1985

Mr. Jay Snow, P.E.
Chief, Solid Waste Section
Texas Department of Water Resources
P. O. Box 13087, Capitol Station
Austin, Texas 78711

*See me about filing the
closure plans*

SUBJECT: CLOSURE PLANS FOR CONTAINER STORAGE AREAS

S. R. Bertron Generating Station	TDWR No. 31637
H. O. Clarke Generating Station	TDWR No. 31635
Greens Bayou Generating Station	TDWR No. 31634
P. H. Robinson Generating Station	TDWR No. 31638
Webster Generating Station	<u>TDWR No. 31633</u>
T. H. Wharton Generating Station	TDWR No. 31636

Dear Mr. Snow:

Discussions between Mr. Ray Austin, Mr. Jim Feeley (TDWR) and Dr. R. D. Groover (HL&P) indicate that, to achieve full-facility closure and generator-only status for the above-referenced facilities, closure plans for container storage areas are required even though the storage areas will continue in use under the "Accumulation Time" storage exclusion (31 TAC, Section 335.69). Transmitted herewith are three (3) copies of closure plans for the container storage areas. The current status of each generating station is briefly summarized below:

S. R. Bertron


All hazardous waste surface impoundments have been closed under TDWR-approved closure plans; an affidavit for exclusion from hazardous waste permitting is in preparation.

H. O. Clarke

All hazardous waste surface impoundments have been closed under TDWR-approved closure plans, and an affidavit of exclusion from hazardous waste permitting was submitted on March 12, 1985.

Greens Bayou

The demineralizer regenerant impoundment has been closed under a TDWR-approved closure plan. After completion of a fiberglass-lined concrete tank, the inorganic impoundment will be closed and an affidavit of exclusion from hazardous waste permitting will be submitted.



CLOSURE PLAN
FOR
WEBSTER HAZARDOUS WASTE CONTAINER STORAGE AREA 31633

1.0 INTRODUCTION

Background - Houston Lighting & Power Company (HL&P) operates a hazardous waste container storage area at the Webster Electric Generating Station. The container storage area is located adjacent to the waste oil tank at the east end of the gas turbine building.

In accordance with the requirements of 31 TAC, Section 335, Subchapter J, and 40 CFR 264.178, this closure plan identifies the steps necessary to close the container storage facility. Following closure, the area will continue to be used as a container storage facility. Accumulation time after closure for hazardous waste will be less than 90 days.

This facility currently stores 55 gallon drums of liquid and solid hazardous and nonhazardous wastes. These wastes include refractory brick, spent solvents, paint thinner, waste oils, miscellaneous oily wastes, and sandblasting grit.

All spills and leaks are cleaned up promptly using absorbants and surfactants when necessary.

2.0 MIGRATION ASSESSMENT

Surface Water - There is little potential for surface water contamination resulting from operation of the container storage area. The area is housed on a concrete pad and all spills or leaks are cleaned up promptly.

Subsurface Migration - The floor of the area is reinforced concrete. Any material spilled or leaked onto the floor is cleaned up promptly. Potential for subsurface migration of wastes from this facility is nil.

3 0 CLOSURE PROCEDURE AND SCHEDULE

Closure of the container storage area will begin on or about August 1, 1985, (pending TDWR approval) and will consist of the following steps:

1. Prior to closure all wastes stored in the facility will be transferred off-site to a Class I disposal facility.
2. The floor will be cleaned using brushes, solvents and an 'all purpose surfactant.
3. Absorbent material will be used to pick up the surfactant.
4. The cleaned area will then be rinsed three times with water. All water will be picked up by wet-vacuum or with sponge mops.
5. All materials and liquids will be placed in a 55 gallon drum for off-site disposal.

4 0 MISCELLANEOUS PROCEDURES

Safety - Protective clothing will be worn during cleaning to provide worker protection.

Material Disposal - All materials, liquids, and protective clothing used during closure of the storage area will be placed in a 55 gallon drum and disposed of at an off-site Class I disposal facility.

TEXAS WATER COMMISSION



Paul Hopkins Chairman
Ralph Roming Commissioner
John O Houchins Commissioner

Larry R Soward Executive Director
Marv Ann Hefner Chief Clerk
James K Rourke Jr General Counsel

September 23, 1985

Mr W F McGuire, Manager
Environmental Protection Department
Houston Lighting and Power
P O Box 1700
Houston, Texas 77001

Dear Mr McGuire

Re Solid Waste Registration No 31633
Webster Generating Station
Full Facility Closure

We have completed a review of the hazardous waste facility closure plan as detailed in your submittal of May 13, 1985. The subject closure plan describes the proposed method of closure for one drum storage area. The closure activities described in the plan have been evaluated pursuant to Title 31 of Texas Administrative Code (TAC) Sections 335.211-335.216, including the closure performance standard of 31 TAC 335.212.

This letter constitutes approval by the Executive Director of the hazardous waste facility closure plan, as described in your referenced submittal. Upon completion of the closure activities, certifications should be submitted by the owner or operator of the subject facility and by an independent Registered Professional Engineer that the hazardous waste management facility has been closed in accordance with the approved closure plan. Once the aforementioned certifications are received, we will resume processing of your Affidavit of Exclusion.

Should you have any questions regarding this evaluation, please contact Joe Gingerich of the Hazardous and Solid Waste Permits Section at AC512/463-8187 or AC512/463-8505.

Sincerely,

Larry R Soward
Executive Director

JG bb

cc Bill Brown, Field Operations Liaison
TWC District 7 Office - Deer Park

SEP 27 1985

5.0 NOTIFICATION

Mr. Merton J. Coloton, Supervisor, TDWR, District 7, will be notified ten (10) days prior to the commencement of closure in the event that TDWR District 7 personnel desire to observe closure activities.

6.0 CLOSURE CERTIFICATION

Following completion of all closure activities, a registered professional engineer will provide a written certification documenting that closure has been completed in accordance with this plan. This written certification will be submitted to the TDWR.

7.0 POST-CLOSURE ACTIVITIES


The storage area will continue to be used for containerized hazardous and nonhazardous wastes. An inventory of accumulation dates will be maintained to insure that hazardous wastes remain on-site for less than 90 days.

The Light company

Houston Lighting & Power P O Box 1700 Houston Texas 77001 (713) 228 9211

LOIS

November 8, 1985

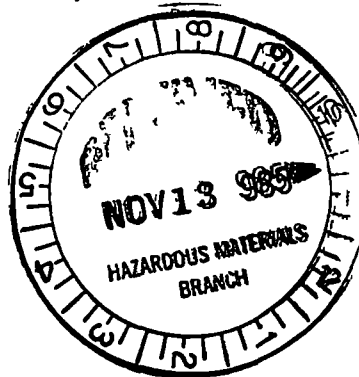

Mr. William N. Rhea
Hazardous Waste Management
Division (GH-HO)
Environmental Protection Agency
Region 6
1201 Elm Street
Interfirst II Building - 28th Floor
Dallas, Texas 75270

SUBJECT: RCRA SECTION 3007 INFORMATION REQUEST
HOUSTON LIGHTING & POWER COMPANY FACILITIES
Cedar Bayou Generating Station #TXD000761841
Deepwater Generating Station #TXD000837427
P. H. Robinson Generating Station #TXD000837401
Webster Generating Station #TXD000837369

Dear Mr. Rhea:

Pursuant to your letter requesting additional information as required by authority of Section 3007 of RCRA, 42 U.S.C. Section 6927, we are submitting information required in Enclosure 2, Item 1, for the subject Houston Lighting & Power Company (HL&P) facilities. Part B Hazardous Waste Permit Applications and certifications of compliance with groundwater monitoring and financial assurance were submitted to the Texas Water Commission (TWC) for the subject facilities on November 6, 1985. Please note that for the remaining HL&P facilities that received your information request, hazardous waste units at the facilities have been closed and certified as per TWC approved closure plans. Additionally, for those facilities, Affidavits of Exclusion from hazardous waste permitting requirements have been submitted to the Texas Water Commission. Therefore, the information provided in this response is limited to the subject facilities.

CEDAR BAYOU GENERATING STATION
FM 1405 Near Baytown
TXD000761841

Hazardous waste land disposal units located at this facility consist of the following:

Houston Lighting & Power Company

Mr. William N. Rhea
November 8, 1985
Page 2

- One clay lined earthen surface impoundment identified as the Demineralizer Regenerant Surface Impoundment utilized for the storage/equalization of demineralizer regenerant wastewater prior to treatment in a concrete wastewater treatment system and discharged under an existing NPDES/TWC permit.
- One clay lined earthen surface impoundment identified as the West Organic Metal Cleaning Impoundment utilized for the storage of demineralizer regenerant wastewater and occasional organic metal cleaning wastes generated during boiler cleaning operations.

DEEPWATER GENERATING STATION

Light Company Road at the Ship Channel
Pasadena, Texas
TXD000837427

Hazardous waste land disposal units located at this facility consist of the following

- Two clay lined above grade surface impoundments identified as the Demineralizer Regenerant/Boiler Blowdown Surface Impoundments utilized for the storage/equalization of demineralizer regenerant and boiler blowdown wastewaters prior to treatment in a concrete wastewater treatment system and discharged under an existing NPDES/TWC permit.

P. H. ROBINSON GENERATING STATION

Highway 146
Baycliff, Texas
TXD000837401

Hazardous waste land disposal units located at this facility consist of the following.

- One clay lined earthen surface impoundment identified as the Demineralizer Regenerant Surface Impoundment utilized for the storage/equalization of demineralizer regenerant wastewater prior to being pumped to the Demineralizer Regenerant/Non-Oily Floor Drain Mixing Surface Impoundment discussed below.
- One clay lined earthen surface impoundment identified as the Demineralizer Regenerant/Non-Oily Floor Drain Mixing Impoundment utilized for the storage/equalization of demineralizer regenerant wastewater and non-oily floor

Houston Lighting & Power Company

Mr. William N. Rhea
November 8, 1985
Page 3

drainage prior to treatment in a concrete wastewater treatment system and discharged under an existing NPDES/TWC permit.

- One clay lined earthen surface impoundment identified as the Inorganic Metal Cleaning Surface Impoundment utilized for the occasional storage/equalization of inorganic metal cleaning waste associated with boiler cleaning operations. This wastewater is then pumped to a concrete wastewater treatment system where it is treated and discharged under an existing NPDES/TWC permit.

WEBSTER GENERATING STATION
19301 Old Galveston Road
Webster, Texas 77598
TXD0008377369

Hazardous waste land disposal units located at this facility consist of the following:

- One clay lined earthen surface impoundment identified as the Demineralizer Regenerant Surface Impoundment utilized for the storage/equalization of demineralizer regenerant wastewater prior to treatment in a concrete wastewater treatment system and discharged under an existing NPDES/TWC permit.
- One clay lined earthen surface impoundment identified as the Inorganic Metal Cleaning Surface Impoundment utilized for the occasional storage/equalization of inorganic metal cleaning wastewater associated with boiler cleaning operations. This wastewater is then pumped to a concrete wastewater treatment system where it is treated and discharged under an existing NPDES/TWC permit.


Closure plans for hazardous waste surface impoundments at Webster and P. H. Robinson were approved by the TWC on August 6, 1985. Closure plans for Cedar Bayou and Deepwater were submitted to the TWC on August 2, 1985, and approval is expected shortly. Of the hazardous waste disposal units discussed above, one surface impoundment at the Webster station (inorganic metal cleaning surface impoundment) has been closed and certified (November 4, 1985), and one surface impoundment at the P. H. Robinson station (inorganic metal cleaning surface impoundment), is currently undergoing closure. The remaining surface impoundments will undergo closure in 1986.

Houston Lighting & Power Company

Mr William N Rhea
November 8, 1985
Page 4

Should you have any questions pursuant to this matter,
please contact Mr. R T Bye at 713/922-2201.

Sincerely,

A handwritten signature in black ink, appearing to read 'W. B. McGuire', with a large, stylized loop at the end.

W. B. McGuire
Manager, Environmental Protection
Department

RTB/rmr
Attachments - 4 site topographic maps

cc Mr. Minor Hibbs, Hazardous & Solid Waste Division, TWC

The Light company

Houston Lighting & Electric, P.O. Box 1700, Houston, Texas 77001 (713) 228-9211

May 6, 1985

Mr. Jay Snow, P.E.
Chief, Solid Waste Section
Texas Department of Water Resources
P. O. Box 13087, Capitol Station
Austin, Texas 78711

Dear Mr. Snow:


SUBJECT: WEBSTER GENERATING STATION - TDWR NO. 31633
Supplement to Closure Plan for Hazardous Waste
Surface Impoundments

A closure plan for hazardous waste surface impoundments at this facility was submitted on February 11, 1985. Your letter of April 15, 1985, discussed deficiencies in the closure plan and requested additional information for use in your evaluation. Attached is a supplement to the closure plan which addresses the comments in your letter.

Your expeditious review and response to the enclosed material will be appreciated since, as stated in the closure plan, HL&P intends to initiate closure on or about June 1, 1985, pending TDWR review and approval.

Please contact Dr. R. D. Groover, 713/922-2195, if you have any questions.

Sincerely,



for W. F. McGuire, Manager
Environmental Protection Dept.

BAD/rmg
Attachment

TEXAS DEPARTMENT OF WATER RESOURCES

HOUSTON, TEXAS

TEXAS

TEXAS WATER DEVELOPMENT BOARD

Louis A. Beecherl, Jr. Chairman
George W. McCleskey Vice Chairman
Glen E. Roney
Lonnie A. "Bo" Pilgrim
Louise Welch
Stuart S. Coleman



Charles F. Nemir
Executive Director

TEXAS WATER COMMISSION

Paul Hopkins Chairman
Lee B. M. Biggart
Ralph Roming

May 16, 1985

Mr. W. F. McGuire, Manager
Environmental Protection Dept
Houston Lighting and Power
P. O. Box 1700
Houston, Texas 77001

Dear Mr. McGuire:

Re: Proposed Wastewater Treatment Tank
Solid Waste Registration No. 31633
Webster, Texas Facility

This is in response to your correspondence received April 22, 1985 which transmitted the plans and specifications for the proposed fiberglass-lined concrete storage tank. As indicated in your letter, this tank will temporarily store demineralizer regenerant wastewater and boiler blowdown prior to treatment in the existing wastewater treatment facility.

The plans were reviewed for conformance with American Concrete Institute (ACI) and American Society of Testing and Materials (ASTM) Standards relating to the materials of construction and the requirements for reinforcing steel. Our review indicates that the proposed tank meets the definition of a "Wastewater Treatment Unit" pursuant to Texas Administrative Code (TAC) 335.42 and appears to be exempt from hazardous waste permitting requirements. We anticipate this decision will expedite your construction plans.

Should you require any additional assistance, please contact Ms. Kathleen DeMarinis at AC512/463-8184.

Sincerely,

Ray Henry Austin, Head
Storage and Processing Facilities Unit
Solid Waste Section

KMD:lab

cc: TDWR District 7 - Deer Park



The Light company

Houston Lighting & Power P.O. Box 1700 Houston Texas 77001 (713) 228-9211

May 13, 1985

Mr. Jay Snow, P.E.
Chief, Solid Waste Section
Texas Department of Water Resources
P. O. Box 13087, Capitol Station
Austin, Texas 78711

SUBJECT. CLOSURE PLANS FOR CONTAINER STORAGE AREAS

S. R. Bertron Generating Station	TDWR No. 31637
H. O. Clarke Generating Station	TDWR No. 31635
Greens Bayou Generating Station	TDWR No. 31634
P. H. Robinson Generating Station	TDWR No. 31638
Webster Generating Station	TDWR No. 31633
T. H. Wharton Generating Station	TDWR No. 31636

Dear Mr. Snow:

Discussions between Mr. Ray Austin, Mr. Jim Feeley (TDWR) and Dr. R. D. Groover (HL&P) indicate that, to achieve full-facility closure and generator-only status for the above-referenced facilities, closure plans for container storage areas are required even though the storage areas will continue in use under the "Accumulation Time" storage exclusion (31 TAC, Section 335.69). Transmitted herewith are three (3) copies of closure plans for the container storage areas. The current status of each generating station is briefly summarized below:

S. R. Bertron

All hazardous waste surface impoundments have been closed under TDWR-approved closure plans; an affidavit for exclusion from hazardous waste permitting is in preparation.

H. O. Clarke

All hazardous waste surface impoundments have been closed under TDWR-approved closure plans, and an affidavit of exclusion from hazardous waste permitting was submitted on March 12, 1985.

Greens Bayou

The demineralizer regenerant impoundment has been closed under a TDWR-approved closure plan. After completion of a fiberglass-lined concrete tank, the inorganic impoundment will be closed and an affidavit of exclusion from hazardous waste permitting will be submitted.

Houston Lighting & Power Company

Mr. Jay Snow
May 13, 1985
Page 2

P. H. Robinson

Closure plans for three hazardous waste surface impoundments have been submitted to TDWR. Upon final approval, closure activities are scheduled to begin in the summer of 1985.

Webster


Closure plans for two hazardous waste surface impoundments have been submitted to TDWR. Upon final approval, closure activities are scheduled to begin in the summer of 1985.

T. H. Wharton

The inorganic metal cleaning impoundment has been closed under a TDWR-approved closure plan. After completion of a fiberglass-lined concrete tank, the demineralizer regenerant impoundment will be closed and an affidavit of exclusion from hazardous waste permitting will be submitted.

Should you have any questions pursuant to these container storage area closure plans, please contact Mr. R. T. Bye at 922-2201.

Sincerely,



for

W. F. McGuire, Manager
Environmental Protection Dept.

RDG/rmr
Attachments

CLOSURE PLAN
FOR
S. R. BERTRON HAZARDOUS WASTE CONTAINER STORAGE AREA

1.0 INTRODUCTION

Background - Houston Lighting & Power Company (HL&P) operates a hazardous waste container storage area at the S. R. Bertron Electric Generating Station. The drum storage area is located in the north side of the Construction Warehouse in one tenth of a metal storage building. The remainder of the building is used for construction storage. The area is clearly identified as a hazardous waste storage area by signs on the buildings.

In accordance with the requirements of 31 TAC, Section 335, Subchapter J, and 40 CFR 264.178, this closure plan identifies the

[REDACTED]

facility. Accumulation time after closure for hazardous waste will be less than 90 days.

This facility currently stores bagged asbestos and 55 gallon drums of liquid and solid hazardous and nonhazardous wastes. These wastes include refractory brick, spent solvents, paint thinner, waste oils, miscellaneous oily wastes, and sandblasting grit.

All spills and leaks are cleaned up promptly using absorbants and surfactants when necessary.

2.0 MIGRATION ASSESSMENT

Surface Water - There is little potential for surface water contamination resulting from operation of the container storage

55 gallon drum and disposed of at an off-site Class 1 disposal facility.

5.0 NOTIFICATION

Mr. Merton J. Coloton, Supervisor, TDWR District 7, will be notified ten (10) days prior to the commencement of closure in the event that TDWR District 7 personnel desire to observe closure activities.

6.0 CLOSURE CERTIFICATION

Following completion of all closure activities, a registered professional engineer will provide a written certification documenting that closure has been completed in accordance with this plan. This written certification will be submitted to the TDWR.

7.0 POST-CLOSURE ACTIVITIES

The storage area will continue to be used for containerized hazardous and nonhazardous wastes. An inventory of accumulation dates will be maintained to insure that hazardous wastes remain on-site for less than 90 days.

CLOSURE PLAN
FOR
WEBSTER HAZARDOUS WASTE CONTAINER STORAGE AREA

1.0 INTRODUCTION

Background - Houston Lighting & Power Company (HL&P) operates a hazardous waste container storage area at the Webster Electric Generating Station. The container storage area is located adjacent to the waste oil tank at the east end of the gas turbine building.

In accordance with the requirements of 31 TAC, Section 335, Subchapter J, and 40 CFR 264.178, this closure plan identifies the steps necessary to close the container storage facility. Following closure, the area will continue to be used as a container storage facility. Accumulation time after closure for hazardous waste will be less than 90 days.

This facility currently stores 55 gallon drums of liquid and solid hazardous and nonhazardous wastes. These wastes include refractory brick, spent solvents, paint thinner, waste oils, miscellaneous oily wastes, and sandblasting grit.

All spills and leaks are cleaned up promptly using absorbants and surfactants when necessary.

2.0 MIGRATION ASSESSMENT

Surface Water - There is little potential for surface water contamination resulting from operation of the container storage area. The area is housed on a concrete pad and all spills or leaks are cleaned up promptly.

Subsurface Migration - The floor of the area is reinforced concrete. Any material spilled or leaked onto the floor is cleaned up promptly. Potential for subsurface migration of wastes from this facility is nil.

3.0 CLOSURE PROCEDURE AND SCHEDULE

Closure of the container storage area will begin on or about August 1, 1985, (pending TDWR approval) and will consist of the following steps:

1. Prior to closure all wastes stored in the facility will be transferred off-site to a Class I disposal facility.
2. The floor will be cleaned using brushes, solvents and an all purpose surfactant.
3. Absorbent material will be used to pick up the surfactant.
4. The cleaned area will then be rinsed three times with water. All water will be picked up by wet-vacuum or with sponge mops.
5. All materials and liquids will be placed in a 55 gallon drum for off-site disposal.

4.0 MISCELLANEOUS PROCEDURES

Safety - Protective clothing will be worn during cleaning to provide worker protection.

Material Disposal - All materials, liquids, and protective clothing used during closure of the storage area will be placed in a 55 gallon drum and disposed of at an off-site Class I disposal facility.

5.0 NOTIFICATION

Mr. Merton J. Coloton, Supervisor, TDWR, District 7, will be notified ten (10) days prior to the commencement of closure in the event that TDWR District 7 personnel desire to observe closure activities.

6.0 CLOSURE CERTIFICATION

Following completion of all closure activities, a registered professional engineer will provide a written certification documenting that closure has been completed in accordance with this plan. This written certification will be submitted to the TDWR.

7.0 POST-CLOSURE ACTIVITIES

The storage area will continue to be used for containerized hazardous and nonhazardous wastes. An inventory of accumulation dates will be maintained to insure that hazardous wastes remain on-site for less than 90 days.

SUPPLEMENT TO

CLOSURE PLAN FOR TWO HAZARDOUS WASTE IMPOUNDMENTS

AT THE WEBSTER GENERATING STATION

TDWR NO. 31633

HOUSTON LIGHTING & POWER COMPANY

HOUSTON, TEXAS

JULY 1985

SEQUENCE OF SAMPLING

For purposes of waste classification prior to disposal as outlined in Sec 3 3, Sludge Thickness and Analysis and Clay Liner Testing, ~~a composite sample of the sludge and first foot of clay liner will be collected and analyzed for pH and the EP Toxicity metals~~ All the sludge and one (1) foot of clay material from the surface of the clay liner will be removed and disposed prior to further sampling the clay liner.

ADDITIONAL ANALYTICAL COMPARISONS AND ANALYSES

In addition to the pH and EP metals toxicity analyses specified in Section 3.3 and the supplement submitted May 6, 1985, ~~seven surface samples of the exposed clay liner and sidewalls will be collected and an analysis for total metals will be performed for the eight EP toxicity metals to demonstrate absence of hazardous waste constituents.~~ Sample collection points will be as described in the May 6 supplement

These results will be compared to three (3) background samples taken in the vicinity of the impoundments and known literature values for soil samples. These background samples will be composites of the top two feet of soil. If the liner total metals concentrations are within the range of these background samples and known natural soil variations, the impoundments will be considered decontaminated of hazardous waste constituents.

In addition, a 24-hour modification of the TDWR leachate test will be performed on the liner samples from the inorganic metal cleaning impoundment. These samples will be analyzed for sulfate and chloride. These results will be compared to values for background soil samples and to groundwater monitoring data available from the groundwater monitoring program at the power plant. If the leachate concentrations are not significantly different from the background soil and groundwater data, the impoundments will be considered free of Class II waste.

ADDITIONAL SOIL BORINGS

In addition to the four shallow borings in the demineralizer impoundment as specified in Section 4.0, POST-CLOSURE ACTIVITIES, two (2) additional borings will be placed in the sidewall of the impoundment near the sampling locations identified in the May 6 supplement. All six borings will be used to verify the liner characteristics as specified in TDWR Technical Guideline No 4. If the liner characteristics are not in accordance with TDWR Guideline No. 4, the clay liner will be reworked and recompactd or additional clay will be placed as necessary to meet guideline recommendations

TEXAS DEPARTMENT OF WATER RESOURCES

1700 N Congress Avenue
Austin Texas

TEXAS WATER DEVELOPMENT BOARD

Louis A Beecherl Jr Chairman
George W McCleskey Vice Chairman
Glen E Roney
Lonnie A Bo Pilgrim
Louie Welch
Stuart S Coleman



Charles E Nemir
Executive Director
MAY 17 1985

TEXAS WATER COMMISSION

Paul Hopkins Chairman
Lee B M Biggart
Ralph Roming

Mr W F McGuire, Manager
Environmental Protection Dept
Houston Lighting and Power
P O Box 1700
Houston, Texas 77001

KMD DeMarinis
AKH Austin
AKH Snow
for

Dear Mr McGuire

Re Proposed Wastewater Treatment Tank
Solid Waste Registration No 31633
Webster, Texas Facility

This is in response to your correspondence received April 22, 1985 which transmitted the plans and specifications for the proposed fiberglass-lined concrete storage tank. As indicated in your letter, this tank will temporarily store demineralizer regenerant wastewater and boiler blowdown prior to treatment in the existing wastewater treatment facility.

The plans were reviewed for conformance with American Concrete Institute (ACI) and American Society of Testing and Materials (ASTM) Standards relating to the materials of construction and the requirements for reinforcing steel. Our review indicates that the proposed tank meets the definition of a "Wastewater Treatment Unit" pursuant to Texas Administrative Code (TAC) 335.42 and appears to be exempt from hazardous waste permitting requirements. We anticipate this decision will expedite your construction plans.

Should you require any additional assistance, please contact Ms Kathleen DeMarinis at AC512/463-8184.

Sincerely,

Ray Henry Austin, Head
Storage and Processing Facilities Unit
Solid Waste Section

KMD lab
cc TDWR District 7 - Deer Park

**The Light
company**

Houston Lighting & Power P O Box 1700 Houston Texas 77001 (713) 228 9211

February 8, 1985

Mr. Ray Henry Austin, Head
Storage and Processing Facilities Unit
Solid Waste Section
Texas Department of Water Resources
P.O. Box 13087, Capitol Station
Austin, Texas 78711

Dear Mr. Austin

SUBJECT. REVISED PART A APPLICATION
WEBSTER GENERATING STATION - TDWR 31633

The August 1980 Part A application for Houston Lighting & Power Company's Webster Generating Station has been updated. The attached revisions reflect current hazardous waste management practices at this facility.

Please call R. D. Groover at (713) 922-2195 if you have any questions concerning these revisions.

Sincerely,



W. F. McGuire, Manager
Environmental Protection Department

BAD/pm/L2

Attachments

cc: M. J. Coloton, TDWR District 7

Webster Generating Station Revised Part A Application

Appropriate tables/pages (attached) of the Part A application have been revised to reflect current hazardous waste management practices at Webster Generating Station

The Part A application prepared in August 1980 listed several wastes/facility components which have been removed in the revised Part A. These wastes/components are discussed below

1 Demineralizer Regenerant Inorganic Sludge

This sludge accumulates at the bottom of the demineralizer impoundment from storage of demineralizer regenerant. Based on EP toxicity analyses submitted to your office on April 8, 1981 (letter attached), this waste has been declassified to a Class II waste (TWC 241470)

2 Metal Cleaning and Other Inorganic Sludge

This sludge accumulates at the bottom of the inorganic impoundment from storage of hydrochloric acid boiler and equipment cleanings, and boiler blowdown. Based on EP toxicity analyses submitted to your office on April 8, 1981 (letter attached), this waste has been declassified to a Class II waste (TWC 241210)

3 Metal Cleaning Organic Acids/Metal Cleaning Organic Acids Collection Pond

This waste is generated from ammoniated citric acid or hydroxyacetic-formic acid boiler and equipment cleanings. It is stored in an impoundment prior to being injected in an energy-producing boiler for incineration. Based on EP toxicity analyses submitted to your office on April 8, 1981 (letter attached), this waste has been declassified to a Class II waste (TWC 215290). The organic impoundment has, therefore, never received hazardous waste

4 Metal Cleaning Organic Sludge

This sludge accumulates at the bottom of the organic impoundment. Based on EP toxicity analyses submitted to your office on April 8, 1981 (letter attached), this waste has been declassified to a Class II waste (TWC 248990)

5 Chemical Waste Treatment System Sludge/Chemical Waste Treatment System & Sand Drying Beds


A concrete chemical waste treatment system is used to treat demineralizer regenerant, inorganic metal cleaning waste (when produced), and boiler blowdown prior to NPDES discharge. The sludge which accumulates in the settling chamber of the treatment system is pumped to sand drying beds for dewatering and periodic off-site disposal. Based on EP toxicity analyses submitted to your office on February 23, 1981 (letter attached), this sludge has been declassified to a Class II waste (TWC 240540)

6 Waste Oil and Sludge/Waste Oil and Sludge Collection Facility

Oily sludge generated from the oily waste treatment system is classified as a Class I nonhazardous or Class II waste, depending on the amount of oil present in the sludge. The attached EP toxicity analyses of oily waste treatment system sludge indicate that no hazardous constituents are present.

7 Asbestos in Insulation

Insulation containing asbestos is classified as a Class I non-hazardous waste (TWC 170750). Asbestos, originally listed on the Part A application, has been delisted from the hazardous waste list (CFR 40 261).



WEBSTER GENERATING STATION

Table III I Hazardous Wastes and Management Activities

Verbal Description of Waste	TDWR Sequence Number	TDWR Waste Code Number	EPA Hazard Code	EPA Hazardous Waste No	Waste Management Activities (Check applicable items)				Estimated 1984	SIC Code and Process
					Off Site Disposal	On Site			Annual Quantity Generated (lbs)	
						Storage ¹	Processing ²	Disposal		
Demineralizer Acid and Base Regeneration Wastewater	007 008	902570 902560	C	D002		X	X		7.93X10 ^{7a}	4911 - Treatment Water
Inorganic Metal Cleaning Waste	010	903070	C	D002		X	X		0 ^b	4911 - denser Boiler & Con
Spent Solvents	005	910100	I	D001 D001	X	X			0	4911 - Degreasing
Paint Thinner	006	910110	I,T	F003,F005	X	X			0.79X10 ³	4911 - Painting
Sandblast Grit		973280	E	D008	X	X			0	4911 - Painting
Liquid Paint Waste		910650	E	D008	X	X			0.89X10 ³	4911 - Painting

a Total quantity discharged from demineralizer impoundment under NPDES permit (includes boiler blowdown)

b Inorganic metal cleaning waste is generated infrequently Quantity generated in 1980 was approximately 1.25X10⁶ lbs

c Projected quantity to be generated in 1985 is approximately 1X10⁴ lbs

¹ Storage means the holding of solid waste for a temporary period at the end of which the waste is processed disposed of or stored elsewhere

² Processing means the extraction of materials transfer volume reduction conversion to energy or other separation and preparation of solid waste for reuse or disposal including the treatment or neutralization of hazardous waste designed to change the physical chemical or biological character or composition of any hazardous waste so as to neutralize such waste or so as to recover energy or material from the waste or so as to render such waste non hazardous or less hazardous safer for transport store or dispose of or amenable for recovery amenable for storage or reduced in volume The transfer of solid waste for reuse or disposal as used above does not include the actions of a transporter in conveying or transporting solid waste by truck ship pipeline or other means Unless the Executive Director determines that regulation of such activity is necessary to protect human health or the environment the definition of processing does not include activities relating to those materials exempted by the Administrator of the EPA pursuant to the federal Solid Waste Disposal Act as amended by the Resource Conservation and Recovery Act 42 U S C 6901 et seq as amended

Table III 2 Hazardous Waste Management Facility Component Summary Sheet

Verbal Description of Waste

Spent Solvents

Process (see last column in Table III 1)

Degreasing

TDWR Sequence Number of Waste (if assigned)

005

Indicate the facility components used for storage/processing/disposal of the above specified waste by entering the number of such facility components by which this waste is managed

☐ Lagoon/Pond (unlined)☐ Landfarm☐ Lagoon/Pond (lined)☐ Landspreading Area☐ Basin (earthen above grade lined)☐ Spray Irrigation Area☐ Basin (earthen above grade unlined)☐ Flood Irrigation Area☐ Basin (earthen below grade lined)☐ Septic Tank/Drain Field☐ Basin (earthen below grade unlined)☐ Injection Well☐ Basin (concrete above grade lined)☐ Tank (surface storage)☐ Basin (concrete above grade unlined)☐ Tank (sub surface storage)☐ Basin (concrete below grade lined)☐ Tank (surface processing)☐ Basin (concrete below grade unlined)☐ Tank (sub surface processing)☐ Basin (other)☐ Tank (other)☐ Pit (lined)☒ 1 Drum Storage Area (open)☐ Pit (unlined)☐ Other Container Storage Area☐ Incinerator☐ Other Container Storage Area☐ Open Controlled Incineration Area
☐ Other Container Storage Area (specify type of
of container. _____
☐ Boiler (energy producing)

_____)

☐ Landfill (sanitary)☐ Waste Pile Storage Area☐ Landfill (surface open)☒ 1 Other (specify Mixed with☐ Landfill (other)
waste oil for pickup by a
waste oil recycling firm

Table III 2 Hazardous Waste Management Facility Component Summary Sheet

Verbal Description of Waste

Paint Thinner

Process (see last column in Table III 1)

Painting

TDWR Sequence Number of Waste (if assigned) 006

Indicate the facility components used for storage/processing/disposal of the above specified waste by entering the number of such facility components by which this waste is managed

- | | |
|---|---|
| <input type="checkbox"/> Lagoon/Pond (unlined) | <input type="checkbox"/> Landfarm |
| <input type="checkbox"/> Lagoon/Pond (lined) | <input type="checkbox"/> Landspreading Area |
| <input type="checkbox"/> Basin (earthen above grade lined) | <input type="checkbox"/> Spray Irrigation Area |
| <input type="checkbox"/> Basin (earthen above grade unlined) | <input type="checkbox"/> Flood Irrigation Area |
| <input type="checkbox"/> Basin (earthen below grade lined) | <input type="checkbox"/> Septic Tank/Drain Field |
| <input type="checkbox"/> Basin (earthen below grade unlined) | <input type="checkbox"/> Injection Well |
| <input type="checkbox"/> Basin (concrete above grade lined) | <input type="checkbox"/> Tank (surface storage) |
| <input type="checkbox"/> Basin (concrete above grade unlined) | <input type="checkbox"/> Tank (sub surface storage) |
| <input type="checkbox"/> Basin (concrete below grade lined) | <input type="checkbox"/> Tank (surface processing) |
| <input type="checkbox"/> Basin (concrete below grade unlined) | <input type="checkbox"/> Tank (sub surface processing) |
| <input type="checkbox"/> Basin (other) | <input type="checkbox"/> Tank (other) |
| <input type="checkbox"/> Pit (lined) | <input checked="" type="checkbox"/> 1 Drum Storage Area (open) |
| <input type="checkbox"/> Pit (unlined) | <input type="checkbox"/> Other Container Storage Area |
| <input type="checkbox"/> Incinerator | <input type="checkbox"/> Other Container Storage Area |
| <input type="checkbox"/> Open Controlled Incineration Area | <input type="checkbox"/> Other Container Storage Area (specify type of
of container_____) |
| <input type="checkbox"/> Boiler (energy producing) | <input type="checkbox"/> _____) |
| <input type="checkbox"/> Landfill (sanitary) | <input type="checkbox"/> Waste Pile Storage Area |
| <input type="checkbox"/> Landfill (surface open) | <input type="checkbox"/> Other (specify _____) |
| <input type="checkbox"/> Landfill (other) | <input type="checkbox"/> _____) |

WEBSTER GENERATING STATION

Table III 2 Hazardous Waste Management Facility Component Summary Sheet

Verbal Description of Waste

Demineralizer Acid and Base
Regeneration Wastewater

Process (see last column in Table III 1)

Water Treatment

TDWR Sequence Number of Waste (if assigned) 007, 008

Indicate the facility components used for storage/processing/disposal of the above specified waste by entering the number of such facility components by which this waste is managed

<input type="checkbox"/> Lagoon/Pond (unlined)	<input type="checkbox"/> Landfarm
<input checked="" type="checkbox"/> Lagoon/Pond (lined)	<input type="checkbox"/> Landspreading Area
<input type="checkbox"/> Basin (earthen above grade lined)	<input type="checkbox"/> Spray Irrigation Area
<input type="checkbox"/> Basin (earthen above grade unlined)	<input type="checkbox"/> Flood Irrigation Area
<input type="checkbox"/> Basin (earthen below grade lined)	<input type="checkbox"/> Septic Tank/Drain Field
<input type="checkbox"/> Basin (earthen below grade unlined)	<input type="checkbox"/> Injection Well
<input type="checkbox"/> Basin (concrete above grade lined)	<input type="checkbox"/> Tank (surface storage)
<input type="checkbox"/> Basin (concrete above grade unlined)	<input type="checkbox"/> Tank (sub surface storage)
<input type="checkbox"/> Basin (concrete below grade lined)	<input type="checkbox"/> Tank (surface processing)
<input type="checkbox"/> Basin (concrete below grade unlined)	<input type="checkbox"/> Tank (sub surface processing)
<input type="checkbox"/> Basin (other)	<input type="checkbox"/> Tank (other)
<input type="checkbox"/> Pit (lined)	<input type="checkbox"/> Drum Storage Area
<input type="checkbox"/> Pit (unlined)	<input type="checkbox"/> Other Container Storage Area
<input type="checkbox"/> Incinerator	<input type="checkbox"/> Other Container Storage Area
<input type="checkbox"/> Open Controlled Incineration Area	<input type="checkbox"/> Other Container Storage Area (specify type of of container_____)
<input type="checkbox"/> Boiler (energy producing)	_____)
<input type="checkbox"/> Landfill (sanitary)	<input type="checkbox"/> Waste Pile Storage Area
<input type="checkbox"/> Landfill (surface open)	<input type="checkbox"/> Other (specify _____)
<input type="checkbox"/> Landfill (other)	_____)

Table III 2 Hazardous Waste Management Facility Component Summary Sheet

Verbal Description of Waste

Inorganic Metal
Cleaning Waste

Process (see last column in Table III 1)

Boiler & Condenser Cleaning

TDWR Sequence Number of Waste (if assigned) 010

Indicate the facility components used for storage/processing/disposal of the above specified waste by entering the number of such facility components by which this waste is managed

<input type="checkbox"/> Lagoon/Pond (unlined)	<input type="checkbox"/> Landfarm
<input checked="" type="checkbox"/> Lagoon/Pond (lined)	<input type="checkbox"/> Landspreading Area
<input type="checkbox"/> Basin (earthen above grade lined)	<input type="checkbox"/> Spray Irrigation Area
<input type="checkbox"/> Basin (earthen above grade unlined)	<input type="checkbox"/> Flood Irrigation Area
<input type="checkbox"/> Basin (earthen below grade lined)	<input type="checkbox"/> Septic Tank/Drain Field
<input type="checkbox"/> Basin (earthen below grade unlined)	<input type="checkbox"/> Injection Well
<input type="checkbox"/> Basin (concrete above grade lined)	<input type="checkbox"/> Tank (surface storage)
<input type="checkbox"/> Basin (concrete above grade unlined)	<input type="checkbox"/> Tank (sub surface storage)
<input type="checkbox"/> Basin (concrete below grade lined)	<input type="checkbox"/> Tank (surface processing)
<input type="checkbox"/> Basin (concrete below grade unlined)	<input type="checkbox"/> Tank (sub surface processing)
<input type="checkbox"/> Basin (other)	<input type="checkbox"/> Tank (other)
<input type="checkbox"/> Pit (lined)	<input type="checkbox"/> Drum Storage Area
<input type="checkbox"/> Pit (unlined)	<input type="checkbox"/> Other Container Storage Area
<input type="checkbox"/> Incinerator	<input type="checkbox"/> Other Container Storage Area
<input type="checkbox"/> Open Controlled Incineration Area	<input type="checkbox"/> Other Container Storage Area (specify type of of container _____)
<input type="checkbox"/> Boiler (energy producing)	<input type="checkbox"/> Waste Pile Storage Area
<input type="checkbox"/> Landfill (sanitary)	<input type="checkbox"/> Other (specify _____)
<input type="checkbox"/> Landfill (surface open)	
<input type="checkbox"/> Landfill (other)	

Table III 2 Hazardous Waste Management Facility Component Summary Sheet

Verbal Description of Waste

Sandblast Grit

Process (see last column in Table III 1)

Painting

TDWR Sequence Number of Waste (if assigned)

Indicate the facility components used for storage/processing/disposal of the above specified waste by entering the number of such facility components by which this waste is managed

- | | |
|---|---|
| <input type="checkbox"/> Lagoon/Pond (unlined) | <input type="checkbox"/> Landfarm |
| <input type="checkbox"/> Lagoon/Pond (lined) | <input type="checkbox"/> Landspreading Area |
| <input type="checkbox"/> Basin (earthen above grade lined) | <input type="checkbox"/> Spray Irrigation Area |
| <input type="checkbox"/> Basin (earthen above grade unlined) | <input type="checkbox"/> Flood Irrigation Area |
| <input type="checkbox"/> Basin (earthen below grade lined) | <input type="checkbox"/> Septic Tank/Drain Field |
| <input type="checkbox"/> Basin (earthen below grade unlined) | <input type="checkbox"/> Injection Well |
| <input type="checkbox"/> Basin (concrete above grade lined) | <input type="checkbox"/> Tank (surface storage) |
| <input type="checkbox"/> Basin (concrete above grade unlined) | <input type="checkbox"/> Tank (sub surface storage) |
| <input type="checkbox"/> Basin (concrete below grade lined) | <input type="checkbox"/> Tank (surface processing) |
| <input type="checkbox"/> Basin (concrete below grade unlined) | <input type="checkbox"/> Tank (sub surface processing) |
| <input type="checkbox"/> Basin (other) | <input type="checkbox"/> Tank (other) |
| <input type="checkbox"/> Pit (lined) | <input type="checkbox"/> Drum Storage Area |
| <input type="checkbox"/> Pit (unlined) | <input type="checkbox"/> Other Container Storage Area |
| <input type="checkbox"/> Incinerator | <input type="checkbox"/> Other Container Storage Area |
| <input type="checkbox"/> Open Controlled Incineration Area | <input checked="" type="checkbox"/> Other Container Storage Area (specify type of
of container <u>(covered bins)</u> |
| <input type="checkbox"/> Boiler (energy producing) | <input type="checkbox"/> _____) |
| <input type="checkbox"/> Landfill (sanitary) | <input type="checkbox"/> Waste Pile Storage Area |
| <input type="checkbox"/> Landfill (surface open) | <input type="checkbox"/> Other (specify _____ |
| <input type="checkbox"/> Landfill (other) | <input type="checkbox"/> _____) |

Table III 2 Hazardous Waste Management Facility Component Summary Sheet

Verbal Description of Waste

Liquid Paint Wastes

Process (see last column in Table III 1)

Painting

TDWR Sequence Number of Waste (if assigned)

Indicate the facility components used for storage/processing/disposal of the above specified waste by entering the number of such facility components by which this waste is managed

- | | |
|---|--|
| <input type="checkbox"/> Lagoon/Pond (unlined) | <input type="checkbox"/> Landfarm |
| <input type="checkbox"/> Lagoon/Pond (lined) | <input type="checkbox"/> Landspreading Area |
| <input type="checkbox"/> Basin (earthen above grade lined) | <input type="checkbox"/> Spray Irrigation Area |
| <input type="checkbox"/> Basin (earthen above grade unlined) | <input type="checkbox"/> Flood Irrigation Area |
| <input type="checkbox"/> Basin (earthen below grade lined) | <input type="checkbox"/> Septic Tank/Drain Field |
| <input type="checkbox"/> Basin (earthen below grade unlined) | <input type="checkbox"/> Injection Well |
| <input type="checkbox"/> Basin (concrete above grade lined) | <input type="checkbox"/> Tank (surface storage) |
| <input type="checkbox"/> Basin (concrete above grade unlined) | <input type="checkbox"/> Tank (sub surface storage) |
| <input type="checkbox"/> Basin (concrete below grade lined) | <input type="checkbox"/> Tank (surface processing) |
| <input type="checkbox"/> Basin (concrete below grade unlined) | <input type="checkbox"/> Tank (sub surface processing) |
| <input type="checkbox"/> Basin (other) | <input type="checkbox"/> Tank (other) |
| <input type="checkbox"/> Pit (lined) | <input checked="" type="checkbox"/> Drum Storage Area (open) |
| <input type="checkbox"/> Pit (unlined) | <input type="checkbox"/> Other Container Storage Area |
| <input type="checkbox"/> Incinerator | <input type="checkbox"/> Other Container Storage Area |
| <input type="checkbox"/> Open Controlled Incineration Area | <input type="checkbox"/> Other Container Storage Area (specify type of
of container _____) |
| <input type="checkbox"/> Boiler (energy producing) | _____) |
| <input type="checkbox"/> Landfill (sanitary) | <input type="checkbox"/> Waste Pile Storage Area |
| <input type="checkbox"/> Landfill (surface open) | <input type="checkbox"/> Other (specify _____) |
| <input type="checkbox"/> Landfill (other) | _____) |

Webster Generating Station
Table III 4 Hazardous Waste Facility Components List

Facility Component		Status			Design Capacity			Number of	Date
Name	TDWR Seq No	Inactive	Active	Proposed	(cu yds)	(gal)	(lbs)	Years Utilized	In Service
Lagoon/Pond (lined)	01		X			372,000		14	1970
Verbal Description Clay lined pond for the collection of demineralizer regeneration wastes prior to treatment									
Treated wastewater is discharged via NPDES permit.									
Lagoon/Pond (lined)	02		X			270,000		7	1977
Verbal Description Clay lined pond for the collection of metal cleaning inorganic acid wastes from boiler and									
equipment cleaning operations prior to treatment. Treated wastewater is discharged via NPDES permit.									
Verbal Description									
Drum Storage Area (open)	05		X			NA		4	1980
Verbal Description Drum storage area for the collection of waste solvents, waste paint thinners and liquid paint prior to									
off-site disposal									
Other Container Storage Area				X	NA			NA	NA
Verbal Description Covered bins for storage of blasting material prior to off-site disposal									
Verbal Description									

Attachment G

Webster Generating Station

Process Description for Hazardous Waste Streams

1 Demineralizer Acid and Base Regenerant Wastewater (EPA Hazard Code C)

Demineralizer regenerant waste is collected in the demineralizer impoundment. ~~The waste is then pumped to the chemical waste treatment system for pH adjustment and suspended solids removal. Treated wastewater is discharged in accordance with the NPDES permit.~~

2 Inorganic Metal Cleaning Waste (EPA Hazard Code C)

Inorganic metal cleaning waste is collected in the inorganic impoundment. ~~The waste is then pumped to the chemical waste treatment system for pH adjustment, suspended solids and metals removal. Treated wastewater is discharged in accordance with the NPDES permit.~~

3 Spent Solvents (EPA Hazard Code I)

Spent solvents are collected in drums or mixed with waste oil for recycling.

4 Paint Thinner (EPA Hazard Code I, T)

Paint thinner waste is collected in drums. These drums are temporarily stored prior to off-site disposal.

5 Sandblast Grit (EPA Hazard Code E)

Waste blasting material is collected in bins for temporary storage prior to off-site disposal.

6 Liquid Paint Wastes (EPA Hazard Code E)

Liquid paint waste is collected in drums. These drums are temporarily stored prior to off-site disposal.



ANALYTICAL
PETROLEUM
RESEARCH

Laboratories

HOUSTON LIGHTING & POWER
P O BOX 1700
HOUSTON TEXAS 77001
ATTENTION MS ELLEN ZAMPELLO

DATE SEPTEMBER 25 1984
INVOICE NO. 10582
CERTIFICATE NO. 14438

SAMPLE DESCRIPTION WEB FLOOR DRAIN OIL SUMP (Waste Oil)

SAMPLE DATE SEPTEMBER 7. 1984
DATE RECEIVED SEPTEMBER 7 1984

IGNITABILITY (FLASH POINT) > 212 °F
CORROSIVITY pH = 6.48
REACTIVITY NONE

E P TOXICITY

ANALYSIS =====	RESULTS MG/L =====
ARSENIC	<0.02
BARIUM	<0.3
CADMIUM	<0.01
CHROMIUM	<0.1

ANALYSIS =====	RESULTS MG/L =====
LEAD	<0.1
MERCURY	<0.005
SELENIUM	<0.1
SILVER	<0.1

A P R LABORATORIES

Sammy Russo

RECEIVED
SEP 28 1984



ANALYTICAL
PETROLEUM
RESEARCH

Laboratories

HOUSTON LIGHTING & POWER
P O BOX 1700
HOUSTON TEXAS 77001
ATTENTION MS. ELLEN ZAMPELLO

DATE SEPTEMBER 25, 1984
INVOICE NO 10582
CERTIFICATE NO . 14439

SAMPLE DESCRIPTION WEB GAS TURBINE OIL TRAP (Waste Oil)

SAMPLE DATE SEPT 7 1984

DATE RECEIVED SEPT. 7, 1984

IGNITABILITY (FLASH POINT)

> 212 °F

CORROSIVITY

pH = 5.15

REACTIVITY

NONE

E P TOXICITY

ANALYSIS
=====

RESULTS MG/L
=====

ANALYSIS
=====

RESULTS MG/L
=====

ARSENIC

<0.02

LEAD

<0.1

BARIUM

<0.3

MERCURY

<0.005

CADMIUM

<0.01

SELENIUM

<0.01

CHROMIUM

<0.1

SILVER

<0.01

ENDRIN

<0.02

LINDANE

<0.4

METHOXYCHLOR

<2

TOXAPHENE

<0.2

2,4-DICHLOROPHENOXYACETIC ACID (2,4-D) <1

2,4,5-TP (SILVEX) <1

RECEIVED

SEP 28 1984

A P R LABORATORIES

Sammy Russo
4324 Highway 3

Suite 129

Dickinson Texas 77539

Phone (713) 337-6700

TEXAS DEPARTMENT OF WATER RESOURCES

1700 N Congress Avenue

Austin Texas

TEXAS WATER DEVELOPMENT BOARD

Louis A Beecherl Jr Chairman
 George W McCleskey Vice Chairman
 Glen E Roney
 W O Bankston
 Lonnie A Bo Pilgrim
 Louie Welch



Charles E Nemir
 Executive Director
 June 12, 1984

TEXAS WATER COMMISSION

Paul Hopkins Chairman
 Lee B M Biggart
 Ralph Roming

Kimble *pk*
 Ferguson *SE*
 Barker *EB*
 Dixon *for*

Mr W F McGuire, Manager
 Environmental Protection Department
 Houston Lighting & Power
 P O Box 1700
 Houston, Texas 77001

Dear Mr. McGuire

Re RCRA Financial Assurance
 TDWR Registration Numbers 31632, 31633, 31634, 31635, 31636, 31637
 31638, and 31639

The documents submitted for financial assurance of the above referenced facility(ies) have been reviewed and determined to be complete and in accordance with the applicable regulations. Any revisions or adjustments involving financial assurance of the facility(ies) should be submitted in writing to the attention of Mr Russell Kimble of our Enforcement and Field Operations Division

Sincerely,

Bryan W Dixon, P E , Chief
 Solid Waste and Spill Response Section
 Enforcement and Field Operations Division

RSK jr

ccs Jay Snow, Permits Division, Industrial Solid Waste Section
 Texas Department of Water Resources District 7 Office



The Light company

Houston Lighting & Power P O Box 1700 Houston Texas 77001 (713) 228 9211

May 29, 1984


Mr Paul S Lewis, Geologist
Enforcement & Field Operations Division
Texas Department of Water Resources
P O Box 13087, Capitol Station
Austin, Texas 78711

SUBJECT GROUND-WATER QUALITY ASSESSMENT PLAN, IMPLEMENTATION STUDIES
S R Bertron Generating Station, TDWR Reg No 31637
H O Clarke Generating Station, TDWR Reg No 31635
Deepwater Generating Station, TDWR Reg No 31632
Greens Bayou Generating Station, TDWR Reg No 31634
P H Robinson Generating Station, TDWR Reg No 31638
Webster Generating Station, TDWR Reg No [REDACTED]
T H Wharton Generating Station, TDWR Reg No 31636

Dear Mr Lewis

Enclosed are two (2) copies each of the ground-water quality plan implementation studies for the above-referenced facilities Please contact E A Feith (922-2205) or R D Groover (922-2195) if you have any questions concerning this material As discussed with you previously, Mr Feith and Mr Groover as well as representatives of Underground Resource Management, Inc plan to meet to discuss the reports with you on Thursday, May 31, 1984 at 10 00 a m

Sincerely,



W F McGuire, Manager
Environmental Protection Department

RDG/bwt

Enclosures

31633

PS Form 3811, July 1

• **SENDER.** Complete Items 1, 2, 3, and 4
Add your address in the "RETURN TO" space on reverse

(CONSULT POSTMASTER FOR FEES)

1 The following service is requested (check one)

☐ Show to whom and date delivered

HOUSTON LIGHTING & POWER CO. 316
WEBSTER GENERATING STATION
P O BOX 1700 - W.F.MCGUIRE
HOUSTON, TEXAS 77001
ATTN: W F MCGUIRE

4. TYPE OF SERVICE

☐ REGISTERED ☐ INSURED
☐ CERTIFIED ☐ COD
☐ EXPRESS MAIL

ARTICLE NUMBER
12281

(Always obtain signature of addressee or agent)

I have received the article described above.

SIGNATURE ☐ Addressee ☒ Authorized agent
E. J. Bepko

5. DATE OF DELIVERY
MAR 29 1984

6. ADDRESSEE'S ADDRESS (Only if requested)

7. UNABLE TO DELIVER BECAUSE:

7a. EMPLOYEE'S INITIALS

RETURN RECEIPT

* GPO: 1982-578-603

**McClelland engineers, inc. / geotechnical consultants**6100 HILLCROFT / HOUSTON TEXAS 77081
TEL 713 / 772 3701 / TELEX 762-447

SUBJECT Monitor Well Installation
 Webster Electric Generating Station
 Webster, Texas

DATE July 22, 1982

REPORT NO 0182-0119-1

TO Houston Lighting & Power Company
 12301 Kurland Drive
 Houston, Texas 77034

Attention Mr E A Feith

Introduction

Presented here is the report of our installation of monitor wells at your Webster Electric Generating Station in Webster, Texas. This work was performed in general accordance with our proposal dated June 1, 1982 and was verbally authorized by Mr James Mertink on May 4, 1982.

Field Services

Four monitor wells were installed in the Webster Generating Station at the locations shown on Plate 1. The locations were selected by HL&P and were confirmed by the Texas Department of Water Resources as being acceptable. Holes for the wells were drilled with a medium-duty truck-mounted rig using wet rotary techniques. A geotechnical engineer logged the well holes based on soil cuttings and drilling characteristics. A description of the soils encountered is included in the next section of this report.

As shown on Plate 2, a monitor well consists of a 4-in -diameter PVC riser pipe installed in a 7-in -diameter hole. The PVC riser pipe is provided with 0.02-in -wide slots and is surrounded by filter sand in the monitoring zone. A 1-ft-thick layer of bentonite is placed on top of the sand filter. Soil cuttings from the boring are backfilled in the annulus from the top of the bentonite to about 4 ft below ground surface. Cement grout is placed to fill the remaining annulus to the ground surface. The well is developed by blowing the water and any sediment out of the riser pipe with compressed air.

General Soil Conditions

The general soil stratigraphy at each well location as determined by logging the soil cuttings in the returning wash water and by observing the drilling characteristics is given below

Monitor Well W-1 Clay was observed to a depth of 25 ft Underlying the clay, silty clay with seams and thin layers of sandy silt and clayey silt was found to the bottom of the hole to 29-ft depth

Monitor Well W-2 Fill consisting of clay and silty clay with calcareous deposits was observed to a depth of 12 ft Circulation of drilling fluid was lost at 7-ft depth due to a thin layer of highly permeable organic silt Natural clay is present from 12-ft to the 30-ft depth drilled, the drilling indicates silt seams from 24-ft to 27-ft depth.

Monitor Well W-3 A clay profile was observed from the ground surface to the 30-ft depth of the hole The clay was interbedded with silt from 21-ft to 22-ft depth

Monitor Well W-4 Clay was observed to a depth of 17.5 ft and from

17.5-ft depth.

*

*

*

The following illustrations are attached and complete this report


Plate 1

Site Plan


Plate 2


Monitor Well Installation Data

McCLELLAND ENGINEERS, INC


Edward J Ulrich, Jr , P E
Engineer Manager


JAM/EJU/dka
Copies Submitted (6)



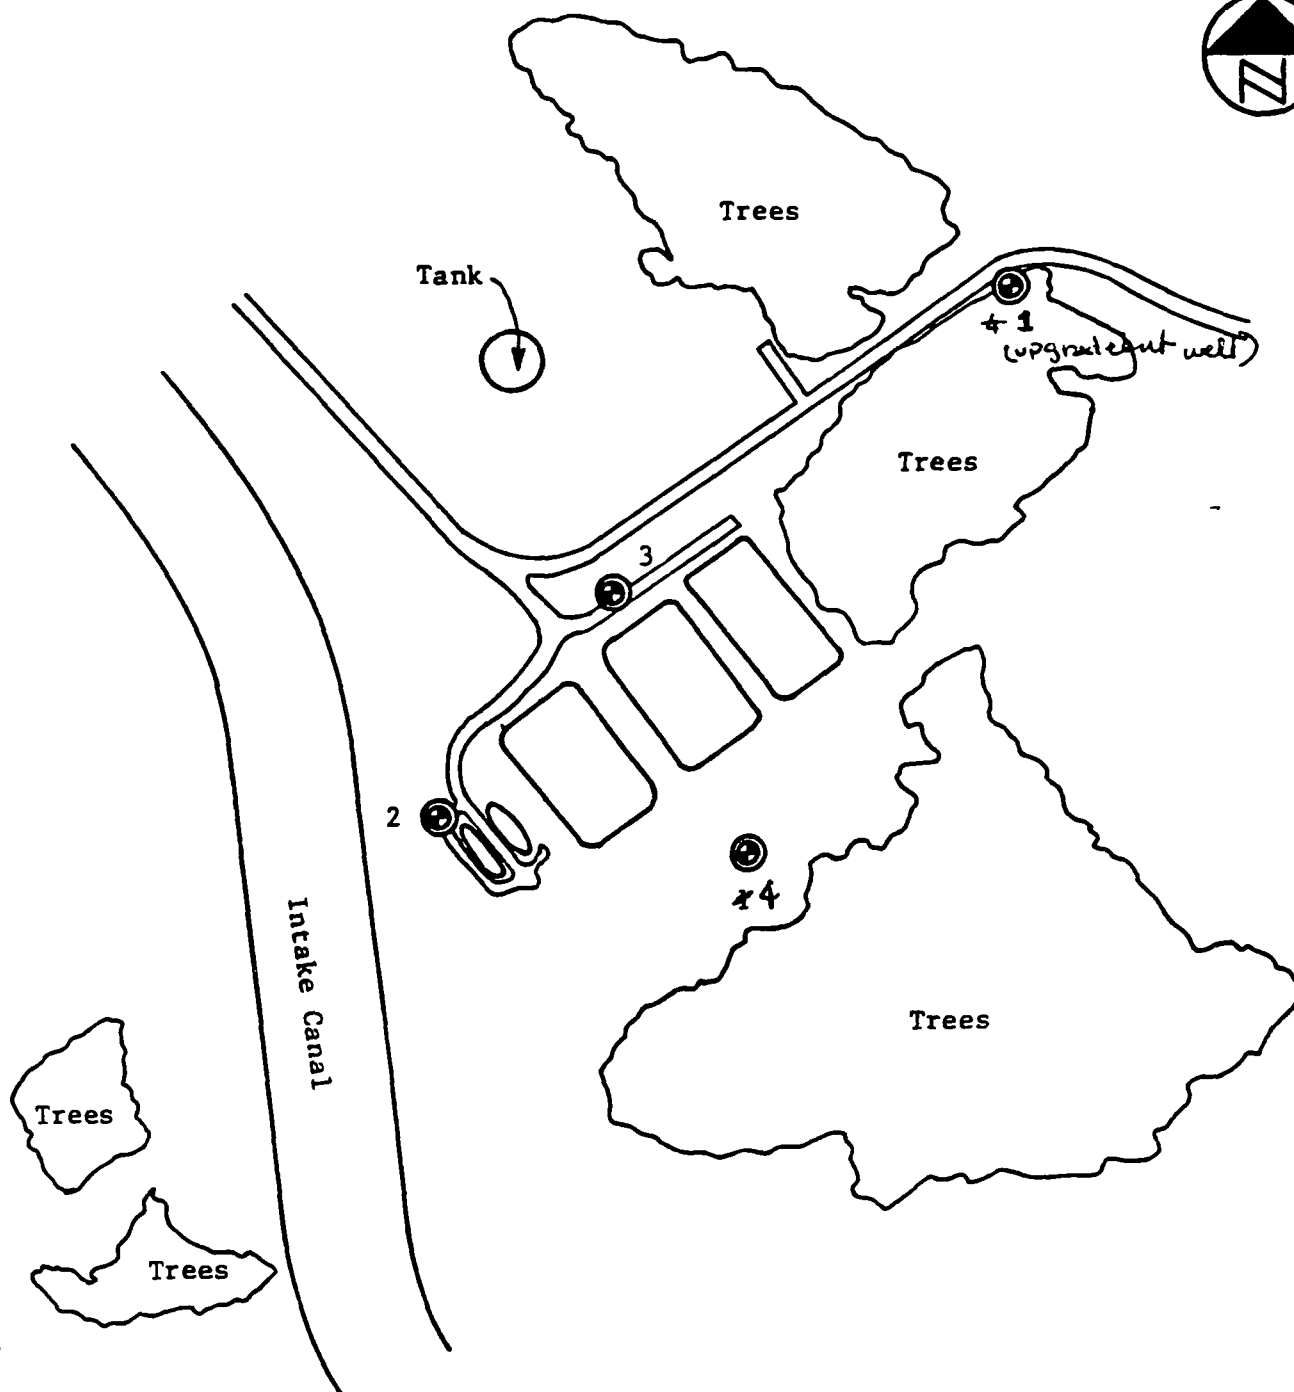


LEGEND

② Monitor Wells



SITE PLAN
Webster Generating Station

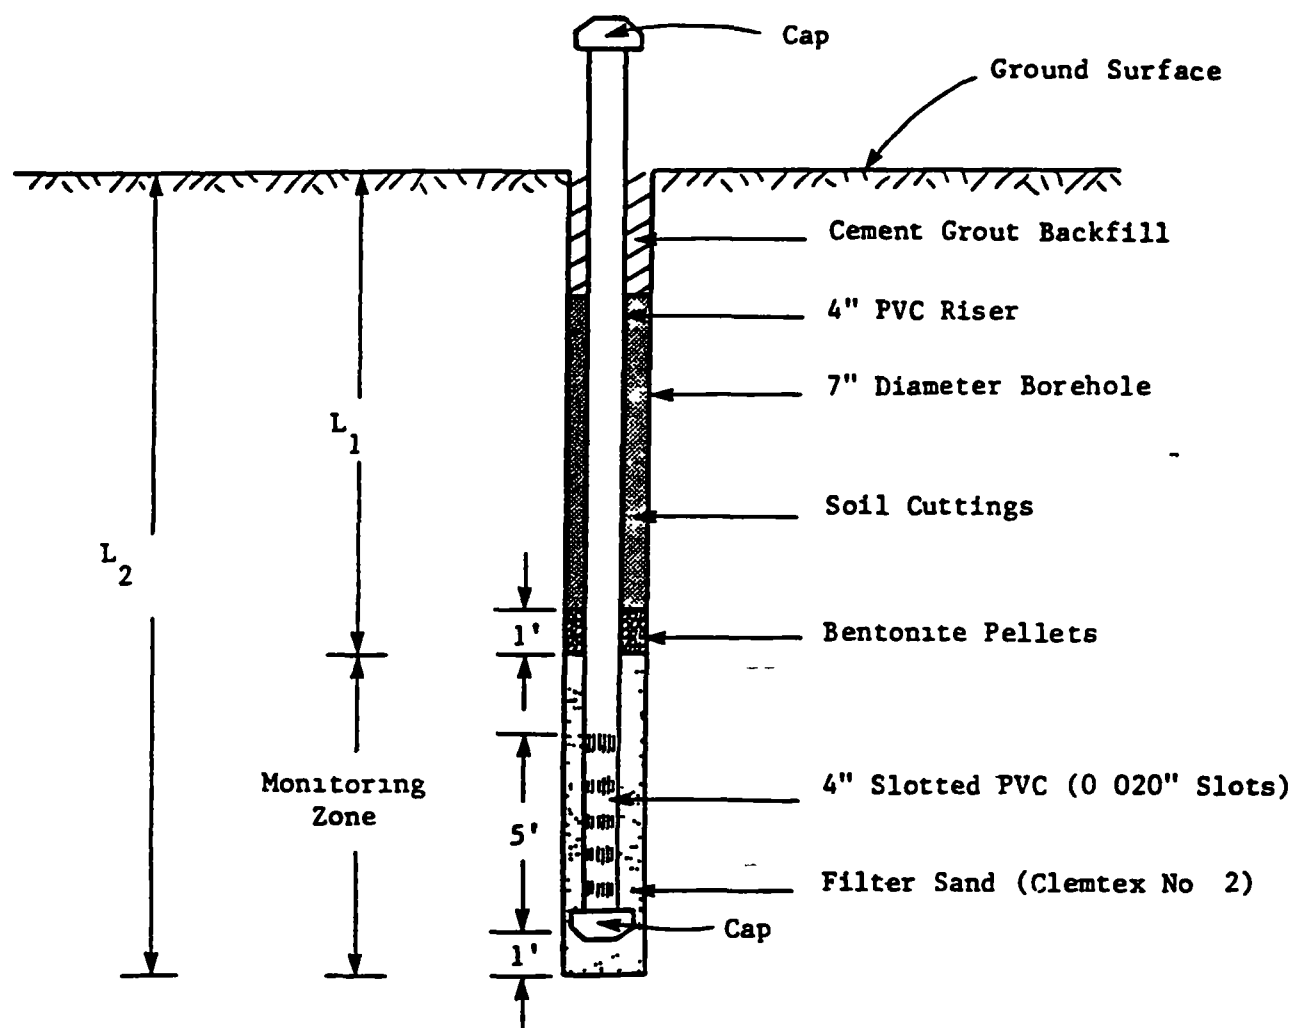

Well No	Installation Date	L_1 , Ft	L_2 , Ft	Granular Layer		
				Description	From, Ft	To, Ft
4 x	5-20-82	18	28	Clayey Silt Seams	25	29
2	5-18-82	18	29	Silt Seams	24	27
3	5-17-82	18	28	Silt Seams	21	22
1 x	5-18-82	10	21	Sandy Silt	17 5	19 5

MONITOR WELL INSTALLATION DATA
Webster Generating Station

FORM SUBMITTED

By _____

Date _____

MAJOR FACILITIES STATUS SHEET

Initial _____ Update _____

0484 12

4/84
2/12

ID No TxDOT 837349 Registration/Permit No 31633

Facility Name HL+P Webster Station District No Dist 7

1 Ground Water Monitoring Status

Detection
Assessment /

Waiver
NA

2 Ground Water Monitoring Well System

a Evaluated? NA NE DATE EVAL'D
b Adequate? YES / NO

3 Ground Water Sampling, Analysis and Evaluation Program

a Evaluated? NA NE DATE EVAL'D
b Adequate? YES / NO

4 Notice of Significant Increase in Parameter Concentrations

Submitted? NA NO DATE SUB'D Oct 1984

5 Ground Water Quality Assessment Report

will submit May 84

a Submitted? NA NO DATE SUB'D
b Evaluated? NE DATE EVAL'D
c Adequate? YES NO
d Showed hazardous waste constituents in ground water?
YES NO

6 Waiver Demonstration

a Evaluated? NA / NE DATE EVAL'D
b Adequate? YES NO

7 Ground Water Monitoring Records

a Evaluated? NA NE DATE EVAL'D
b Adequate? YES / NP

ID # _____

8 Activities Subject to Closure/Post-Closure

Landfill _____ Incinerator _____
 Surface Impoundment ✓ Waste Pile _____
 Land Treatment/Application _____ Other (Specify) _____

9 Closure Plan

a Evaluated? NE _____ DATE EVAL'D _____
 b Adequate? YES ✓ NO _____

10 Closure Cost Estimate

a Evaluated? NA _____ NE _____ DATE EVAL'D _____
 b Adequate? YES ✓ NO _____
 c Amount \$ _____ UNKNOWN _____

11 Closure Assurance Instrument(s)

a Evaluated? NA _____ NE ✓ DATE EVAL'D _____
 b Adequate? YES _____ NO _____ NO INSTRUMENT ✓
 c Type(s)

TRUST FUND _____
 FINANCIAL BOND _____
 PERFORMANCE BOND _____
 LETTER OF CREDIT _____

INSURANCE _____
 FINANCIAL TEST _____
 CORPORATE GUARANTEED _____
 STATE GUARANTEE _____
 OTHER STATE MECHANISM _____

12 Post-Closure Plan

a Evaluated? NA ✓ NE _____ DATE EVAL'D _____
 b Adequate? YES _____ NO _____

13 Post-Closure Cost Estimate

a Evaluated? NA ✓ NE _____ DATE EVAL'D _____
 b Adequate? YES _____ NO _____
 c Amount \$ _____ UNKN JWN _____

14 Post-Closure Assurance Instrument(s)

a Evaluated? NA ✓ NE _____ DATE EVAL'D _____
 b Adequate? YES _____ NO _____ NO INSTRUMENT _____
 c Type(s)

TRUST FUND _____
 FINANCIAL BOND _____
 PERFORMANCE BOND _____
 LETTER OF CREDIT _____

INSURANCE _____
 FINANCIAL TEST _____
 CORPORATE GUARANTEE _____
 STATE GUARANTEE _____
 OTHER STATE MECHANISM _____

ID # _____

15 Sudden Liability Instrument(s)

a Evaluated? NA ☐ NE ☐ DATE EVAL'D July 82
 b Adequate? YES ☐ NO ☐ NO INSTRUMENT ☐
 c Amount \$ _____ per occurrence, \$ _____ annual aggregate
 d Type(s)
 INSURANCE POLICY _____ STATE GUARANTEE _____
 FINANCIAL TEST _____ OTHER STATE MECHANISM _____

16 Nonsudden Liability Instrument(s)

a Evaluated? NA ☐ NE ☐ DATE EVAL'D July 82
 b Adequate? YES ☐ NO ☐ NO INSTRUMENT ☐
 c Amount \$ _____ per occurrence, \$ _____ annual aggregate
 d Type(s)
 INSURANCE POLICY _____ STATE GUARANTEE _____
 FINANCIAL TEST _____ OTHER STATE MECHANISM _____

17 Closure Process

a Process Begun? NO ☒ DATE BEGUN _____
 b In accordance with approved plan and required procedures? YES ☐ NO ☐
 c Closure certifications received? NO ☐ DATE REC'D _____
 d Facility released from closure assurance and liability requirements? NA ☐ NO ☐ DATE RELEASED July 82

18 Post-Closure Process

a Process Begun? NA ☒ NO ☐ DATE BEGUN _____
 b In accordance with approved plan and required procedures? YES ☐ NO ☐
 c Survey plat/Record of wastes received? NO ☐ DATE REC'D _____
 d Post-closure period completed? NO ☐ DATE COMPLETED _____
 e Facility released from post-closure assurance requirements? NA ☐ NO ☐ DATE RELEASED _____

19 Permit Application

a Called? NO ☒ DATE CALLED _____
 b Reason? GROUND WATER _____ FINANCIAL ASSURANCE _____
 CLOSURE _____ LIABILITY COVERAGE _____
 OTHER _____

MEMORANDUM REPORT

**McClelland engineers, inc. / geotechnical consultants**6100 HILLCROFT / HOUSTON TEXAS 7706
TEL 713 / 772 3701 / TELEX 762 447

SUBJECT Geotechnical Investigation
 Class I Disposal Ponds
 Webster Generating Station
 Webster, Texas

DATE November 16, 1981

REPORT NO 0181-0318-4

TO Houston Lighting & Power Company
 12301 Kurland Drive
 Houston, Texas 77034

Attention Mr. James R Mertink

Introduction

Presented here are the results of our investigation of soil conditions at the site of two Class I disposal ponds at your Webster Generating Station in Webster, Texas. This study was performed in general accordance with our proposal dated August 12, 1981 and was authorized by your Purchase Order No M-76559 dated October 9, 1981.

A Demineralizer Regenerant Collection (D R C) pond and an Inorganic Metal Cleaning (I M C) collection pond are presently in use at the plant site. The ponds are about 5 ft deep and were constructed at grade as open-cut excavations.

We understand that the Texas Department of Water Resources indicated that by November 19, 1981, the owners of hazardous waste impoundments must have a groundwater monitoring program. This requirement may be waived if there is a low potential for migration of hazardous waste from the facility. The purposes of this investigation were to obtain information on the soil conditions at the site and evaluate the potential for migration of waste from the ponds to the uppermost aquifer.

To accomplish our objectives, the study included the following phases:

- review of previous geotechnical work performed in the Webster Plant
- field investigation
- laboratory investigation
- engineering analyses

Principal Findings

The principal findings of this study, based on our soil borings and laboratory tests, are presented below

- (1) The ponds are located in clay to a depth of about 20 ft
- (2) The clay is highly plastic and relatively impermeable with average coefficients of permeability of about 5.2×10^{-9} , 5.6×10^{-9} , and 2.2×10^{-9} cm/sec for deionized water, demineralizer regenerant, and inorganic metal cleanser, respectively
- (3) The soil environment for the ponds is considered acceptable for Class I disposal ponds in accordance with the Texas Department of Water Resources Guidelines (Revised March 1, 1978) for unlined ponds. We therefore believe that the pond environments present a low potential for migration of waste

Field Investigation

Information on soil conditions at the site was obtained by reviewing previous geotechnical work performed in the Webster Plant and by drilling two 30-ft and three 25-ft depth undisturbed-sample borings to supplement the available data. The borings are numbered 1 through 6 and are shown on Plate 1. The borings were drilled with a medium-duty truck-mounted rotary rig. Individual boring logs are presented on Plates 2 through 7. Most of the symbols and terms used on the logs are identified on Plate 8.

Undisturbed samples were obtained in the boring at 2-ft intervals from the ground surface to a depth of about 12 ft, at 15 ft, and at 5-ft intervals thereafter. Samples were obtained with a 3-in.-diameter thin-walled tube hydraulically pushed into the soil.

The samples recovered from the boreholes were removed from the sampling devices, examined, and classified by our soil technician. Representative portions of each sample obtained were sealed in appropriate containers and transported to our laboratory. The boreholes were sealed with a cement grout upon completion of drilling.

Laboratory Investigation

The laboratory soil tests were directed primarily toward evaluating soil classification and permeability. The following tabulation gives the type and number of tests performed.

<u>Type of Test</u>	<u>Number of Tests</u>
Penetrometer	55
Liquid and Plastic Limits	2
pH	2
Falling Head Permeability	6

Water content and unit dry weight determinations were made routinely on each permeability test specimen. The results of the pH and permeability tests are presented on Plate 9. All other test results are presented graphically on the boring logs.

Site Conditions

The site is relatively flat at about El +14. Soft to very stiff clay and silty clay is present over the site to a depth of about 20 ft. This clay is highly plastic and is classified as CH in the Unified Classification System. Between about 20 and 26-ft-depth, sandy to clayey silt was encountered. This silt is underlain by stiff clay to the maximum depth explored, 30 ft.

Conclusions

Our borings indicate that clays are present at the site to a depth of about 20 ft, which is 15 ft below the bottoms of the ponds. This satisfies the requirements of the Texas Department of Water Resources Guidelines (Revised March 1, 1978) for unlined Class I disposal ponds. We therefore believe that the pond environments present a low potential for migration of waste.

*

*

*

Plate 1	Site Plan
Plates 2 through 7	Logs of Borings
Plate 8	Terms and Symbols Used on Boring Logs
Plate 9	Permeability Test Results

Edward J. Bludny

Edward J. Ulrich, Jr., P/E
Engineer Manager

JAM/EJU/dka
Copies Submitted (6)

100

5

6

D R C Pond

3

4

I.M C. Pond

1

2

Note
Locations are approximate

PLAN OF BORINGS
Webster Generating Station

0 50 100 Feet

LOG OF BORING NO 1
CLASS I DISPOSAL PONDS
WEBSTER GENERATING STATION
WEBSTER TEXAS

DEPTH FT	SYMBOL	SAMPLES	LOCATION See Plate 1	BLOWS PER FT	% PASSING NO 200 SIFVE	UNIT DRY WT LB PER CU FT	WATER CONTENT %			UNDRAINED SHEAR STRENGTH					DEPTH M	
							Plastic Limit	Natural	Liquid Limit	KIPS PER SQ FT						
										+-----+	0.5	1.0	1.5	2.0		2.5
									2 ¹	50	7	100	12			
			Soft brown clay with roots			106	+	-----	+						1	
5			Stiff brown silty clay with roots												2	
			-firm to 6													
			-dark gray 5' to 9'													
10			-light gray below 9												3	
			Stiff reddish brown clay with calcareous nodules												4	
			-brownish yellow and light gray below 13												5	
15															6	
20															7	
			Reddish brown sandy silt												8	
25															9	
			Stiff brown clay with calcareous nodules												10	
30															11	
															12	
35															13	
40															14	
45															15	
50															16	

JOB NO 0181-0318
 COMPLETION DEPTH 29.5
 DATE October 12, 1981

SAMPLER 3 thin-walled tube

DRILLING METHOD Wet Rotary

STRENGTH LEGEND
 ● Unconfined Compression
 ▲ Unconsolidated Undrained Triaxial Compression
 ◆ Miniature Vane
 (open symbols above indicate remolded tests)
 ◆ Torvane
 ⊠ Hand Penetrometer

LOG OF BORING NO 2
CLASS I DISPOSAL PONDS
WEBSTER GENERATING STATION
WEBSTER TEXAS

DEPTH FT	SYMBOL	SAMPLES	LOCATION See Plate 1	BLOWS PER FT	% PASSING NO 200 SIEVE	UNIT DRY WT LB PER CU FT	WATER CONTENT %			UNDRAINED SHEAR STRENGTH					DEPTH M			
							Plastic Limit	Natural	Liquid Limit	KIPS PER SQ FT								
										+	-----●-----	+	0.5	1.0		1.5	2.0	2.5
													KILOPASCALS					
							20	40	60	25	50	75	100	125				
			Very stiff brown clay -with ferrous and calcareous nodules and roots to 13													1		
5			-dark brown 6' to 9													2		
10			-light gray 10 to 13													3		
			-stiff tan and light gray below 13													4		
15																5		
20																6		
			Reddish brown clayey silt with sand pockets													7		
25																8		
			Stiff tan clay with ferrous nodules													9		
30																10		
																11		
35																12		
																13		
40																14		
																15		
45																16		
																17		
50																18		

JOB NO 0181-0318
 COMPLETION DEPTH 29.5
 DATE October 12 1981

SAMPLER 3 thin-walled tube

DRILLING METHOD Wet Rotary

STRENGTH LEGEND

- Unconfined Compression
- ▲ Unconsolidated Undrained Triaxial Compression
- ◆ Miniature Vane
- (open symbols above and date remolded tests)
- ◆ Torvane
- ⊠ Hand Penetrometer

LOG OF BORING NO 3
CLASS I DISPOSAL PONDS
WEBSTER GENERATING STATION
WEBSTER TEXAS

DEPTH FT	SYMBOL	SAMPLES	LOCATION See Plate 1	BLOWS PER FT	% PASSING NO 200 SIEVE	UNIT DRY WT LB PER CU FT	WATER CONTENT %			UNDRAINED SHEAR STRENGTH					DEPTH M	
							Plastic Limit	Natural	Liquid Limit	KIPS PER SQ FT						
										+-----●-----+	0.5	1.0	1.5	2.0		2.5
											20	40	60	25		50
5			5 ft dark brown clay -w th gravel to 3 -redd sh brown sand w th roots 1 to 2 -silty 2 to 3 -very stiff to 13 to 19 and below 22 -brownish yellow 5 to 6 -tan and reddish brown slickensided with calcareous and ferrous nodules 6 to 10													1
																2
10			-brownish yellow and light gray slickensided 10 to 13													3
																4
15																5
																6
20																7
			-tan with sand pockets below 23'													8
25			Reddish brown clayey silt													9
																10
30																11
																12
35																13
																14
40																15
																16
45																17
																18
50																19
																20
																21
																22
																23
																24
																25
																26
																27
																28
																29
																30
																31
																32
																33
																34
																35
																36
																37
																38
																39
																40
																41
																42
																43
																44
																45
																46
																47
																48
																49
																50
																51
																52
																53
																54
																55
																56
																57
																58
																59
																60
																61
																62
																63
																64
																65
																66
																67
																68
																69
																70
																71
																72
																73
																74
																75
																76
																77
																78
																79
																80
																81
																82
																83
																84
																85
																86
																87
																88
																89
																90
																91
																92
																93
																94
																95
																96
																97
																98
																99
																100

JOB NO 0181-0318

COMPLETION DEPTH 24.5

DATE October 12 1981

SAMPLER 3 thin-walled tube

DRILLING METHOD Wet Rotary

STRENGTH LEGEND

● Unconfined Compression

▲ Unconsolidated Undrained Triaxial Compression

◆ Mature Vane

(open symbols above indicate remolded tests)

◆ Torvane

⊠ Hand Penetrometer

JOB NO 0181-0318
 COMPLETION DEPTH 24.5
 DATE October 12 1981

SAMPLER 3 thin-walled tube
 DRILLING METHOD Wet Rotary

STRENGTH LEGEND
 ● Unconfined Compression
 ▲ Unconsolidated Undrained Triaxial Compression
 ◆ Moisture Vane
 (open symbols above indicate remolded tests)
 ♦ Torvane
 ⊠ Hand Penetrometer

LOG OF BORING NO 4
CLASS I DISPOSAL PONDS
WEBSTER GENERATING STATION
WEBSTER TEXAS

DEPTH FT	SYMBOL	SAMPLES	LOCATION See Plate 1	BLOWS PER FT	% PASSING NO 200 SIEVE	UNIT DRY WT LB PER CU FT	WATER CONTENT %			UNDRAINED SHEAR STRENGTH					DEPTH M	
							Plastic Limit	Natural	Liquid Limit	KIPS PER SQ FT						
										+-----●-----+	0.5	1.0	1.5	2.0		2.5
							20	40	60	25	50	75	100	125		
			Very stiff dark brown clay with calcareous nodules and roots -with silt pockets below 2.5													1
5			Stiff dark gray silty clay with ferrous and calcareous nodules and roots -brownish yellow 6 to 8 -very stiff reddish brown 8 to 10 -tan and light gray below 10			109	●-----+									2
10																3
15																4
20																5
25			Reddish brown clayey silt													6
30																7
35																8
40																9
45																10
50																11
																12
																13
																14
																15
																16

JOB NO 0181-0318
 COMPLETION DEPTH 24.5'
 DATE October 13 1981

SAMPLER 3 thin-walled tube
 DRILLING METHOD Wet Rotary

STRENGTH LEGEND
 ● Unconfined Compression
 ▲ Unconsolidated Undrained Triaxial Compression
 ◆ Miniature Vane
 (open symbols above and care removed tests)
 ◆ Torvane
 ⊠ Hand Penetrometer

LOG OF BORING NO 5
CLASS I DISPOSAL PONDS
WEBSTER GENERATING STATION
WEBSTER TEXAS

DEPTH FT	SYMBOL	SAMPLES	LOCATION See Plate 1	BLOWS PER FT	% PASSING NO 200 SIEVE	UNIT DRY WT LB PER CU FT	WATER CONTENT %			UNDRAINED SHEAR STRENGTH					DEPTH M	
							Plastic Limit	Natural	Liquid Limit	KIPS PER SQ FT						
										+-----+-----+	0.5	1.0	1.5	2.0		2.5
							20	40	60	25	50	75	100	125		
			Very stiff tan and brown clay with calcareous nodules and roots -dark brown with ferrous nodules 2.5 to 4 -brown 4 to 6 -firm to stiff below 5 -tan 6 to 10													1
5																2
10			-slickensided 10 to 13 -with ferrous nodules below 13													3
15																4
20			Reddish brown clayey silt with sand pockets													5
25			Stiff tan and reddish brown clay slickensided with ferrous nodules													6
30																7
35																8
40																9
45																10
50																11
																12
																13
																14
																15
																16

JOB NO 0181-0318
 COMPLETION DEPTH 24.5
 DATE October 13 1961

SAMPLER 3 thin-walled tube

DRILLING METHOD Wet Rotary

STRENGTH LEGEND

- Unconfined Compression
- ▲ Unconsolidated Undrained Triaxial Compression
- ◆ Miniature Vane
- (open symbols above and date remolded tests)
- ◆ Torvane
- ⊠ Hand Penetrometer

LOG OF BORING NO 6															
CLASS I DISPOSAL PONDS															
WEBSTER GENERATING STATION															
WEBSTER TEXAS															
DEPTH FT	SYMBOL	SAMPLES	LOCATION See Plate 1	BLOWS PER FT	% PASSING NO 200 SIEVE	UNIT DRY WT LB PER CU FT	WATER CONTENT %			UNDRAINED SHEAR STRENGTH		DEPTH M			
							Plastic Limit	Natural	Liquid Limit	KIPS PER SQ FT					
										0.5	1.0		1.5	2.0	2.5
										KILOPASCALS					
					2	50	5	100	2						
5			Stiff dark brown clay with calcareous nodules and roots -yellowish brown intermixed with gravel and shells 3 to 4 -tan and light gray									1			
10			-slickensided with ferrous nodules below 8									2			
15												3			
20												4			
25			Reddish brown clayey silt									5			
30			Stiff tan clay with calcareous and ferrous nodules									6			
35												7			
40												8			
45												9			
50												10			
55												11			
60												12			
65												13			
70												14			
75												15			
80												16			

JOB NO 0181-0318

COMPLETION DEPTH 25.0

DATE October 13 1981

SAMPLER 3 thin-walled tube

DRILLING METHOD Wet Rotary

STRENGTH LEGEND

- Unconfined Compression
- ▲ Unconsolidated Undrained Triaxial Compression
- ◆ Miniature Vane
- (open symbols above indicate remolded tests)
- ◆ Torvane
- ⊠ Hand Penetrometer

ATTACHMENT K

Table of Well Construction Details

Well Number	MW-1	MW-2	MW-3	MW-4
Casing Diameter	7 in	7 in	7 in	7 in
Total Depth	21 ft ?	28 ft ?	29 ft ?	28 ft ?
Drill Method	Wet Rotary	Wet Rotary	Wet Rotary	Wet Rotary
Date Drilled	5-20-82	5-18-82	5-17-82	5-18-82
Casing I.D.	4 in	4 in	4 in	4 in
Casing Type	PVC	PVC	PVC	PVC
How Joined	N P	N P	N P	N P
Stick-up Length	N P	N P	N P	N P
T.C.C. (MSL)	19 48 ft	21 11 ft	21 94 ft	21 43 ft
Ground Level (MSL)	N P	N P	N P	N P
Capped/Lockable	Yes/No	Yes/No	Yes/No	Yes/No
Surface Pad Size	3 ft	3 ft	3 ft	3 ft
Depth Surface Seal	0- 4 ft Cement	0-4 ft Cement	0-4 ft Cement	0-4 ft Cement
Annulus Fill	Soil Cuttings	Soil Cuttings	Soil Cuttings	Soil Cuttings
Depth Annulus Seal	9 ft	17 ft	17 ft	17 ft
Depth Gravel Pack	10 ft	18 ft	18 ft	18 ft
Length Gravel Pack	11 ft	10 ft	11 ft	10 ft
Size of Gravel Pack	Clemtex No 2	Clemtex No 2	Clemtex No 2	Clemtex No 2
Depth Screen	15-20	22-27	23-28	22-27
Screen I.D. / Slot	0 02 in	0 02 in	0 02 in	0 02 in
Screen Type	PVC	PVC	PVC	PVC
Screen Length	5 ft	5 ft	5 ft	5 ft
Blank Length	1 ft	1 ft	1 ft	1 ft

Development Method	Compressed Air	Compressed Air	Compressed Air	Compressed Air
-----------------------	-------------------	-------------------	-------------------	-------------------

N P = Not Provided in Well Construction Details

Note that depth of well and depth to screen are based on Table 7 in GWQA Report dated 5-29-84 which is in disagreement with Original construction data dated 7-22-82

	<u>Sample 1</u>	<u>Sample 2</u>
Boring	1	4
Depth, Ft	3	7
Plastic Limit	18	19
Liquid Limit	55	66

Deionized Water

Coefficient of Permeability (cm/sec)	6.3×10^{-9}	4.0×10^{-9}
pH	7.5	7.5

Demineralizer Regenerant

Coefficient of Permeability (cm/sec)	1.2×10^{-9}	1.0×10^{-8}
pH	2.3	2.3

Inorganic Metal Cleanser

Coefficient of Permeability (cm/sec)	2.9×10^{-9}	1.4×10^{-9}
pH	10.4	10.4

PERMEABILITY TEST RESULTS
Webster Generating Station

ATTACHMENT

TEXAS DEPARTMENT OF WATER RESOURCES

PERMIT APPLICATION
FOR

INDUSTRIAL SOLID WASTE STORAGE/PROCESSING/DISPOSAL FACILITY

PART A - FACILITY BACKGROUND INFORMATION

APPL. NO.	10502
COUNTY-DIST.	Harris
RECEIVED AND ACKNOWLEDGED BY CARD DATED	
ADM. REVIEW BY	
ADMINISTRATIVELY COMPLETE	
COPIES SENT:	(CHECK)
DIST 7	

I. GENERAL INFORMATION

A. Applicant: Houston Lighting & Power, Webster Generating Station
(Individual, Corporation, or Other Legal Entity Name)

Address: P.O. Box 1700

City: Houston, State: Texas Zip Code: 77001

Telephone Number: (713) 481-7145

B. Authorized Agents

- List those persons or firms authorized to act for the applicant during the processing of the permit application. Also indicate the capacity in which each person may represent the applicant (engineering, legal, etc.). The person listed first will be the primary recipient of correspondence regarding this application. Include the complete mailing addresses and phone numbers.

W. F. McGuire, Manager, Environmental Protection Department

Houston Lighting & Power Company

P.O. Box 1700, Houston, Texas 77001

(713) 481-7145

R. M. McCuiston, Vice-President, Power System Development

Houston Lighting & Power Company

P.O. Box 1700

Houston, Texas 77001

(713) 228-9211

- List the individual and his/her mailing address that will be responsible for causing any necessary public notices to be published in the newspaper.

Name: W. F. McGuire

Address: P.O. Box 1700

City: Houston, State: Texas Zip Code: 77001

Telephone Number: (713) 481-7145

RECEIVED

AUG 18 1980

PERMIT CONTROL
TDWR

3 List the applicant's authorized agent for service

Name J R Johnston
Address 611 Walker, P O Box 1700
City Houston, State Texas Zip Code 77001
Telephone Number (713) 228-9211

C Operator Identify the entity who will conduct facility operations
If same as applicant, state "same as applicant "

Name Same as applicant
Address _____
City _____ State _____ Zip Code _____
Telephone Number _____

D Ownership

- (1) Corporation _____
(2) Partnership _____
(3) Proprietorship _____
(4) Non-profit organization _____

b Public _____

- (1) Federal _____
(2) Military _____
(3) State _____
(4) Regional _____
(5) County _____
(6) Municipal _____

c Other (specify) _____

2 Is facility and site property owned by applicant?

X Yes No

If you checked "no",

RECEIVED

AUG 18 1980

PERMIT CONTROL
TDWR

- a Submit as an attachment a copy of the lease for use of said facility and/or site property, as appropriate, and
- b Identify the facility owner If same as applicant in Part A above, state "same as applicant " If different from the applicant, please note that the owner is required to sign the application on page 5

Name Same as applicant

Address _____

City _____ State _____ Zip Code _____

Telephone Number _____

E Type of Permit Application

- 1 New X
- 2 Amendment _____ (TDWR Permit Number _____)

F Registration and Permit Information

- 1 Denote your TDWR Solid Waste Registration Number If none, state "none "

31633

- 2 Indicate (by listing the permit number(s) in the appropriate column below) all existing or pending State and/or Federal permits or construction approvals which pertain to pollution control or industrial solid waste management activities conducted by your plant or at your location Complete each blank by entering the permit number, or the date of application, or "none"

Relevant Program and/or Law

	<u>Permit No</u>	<u>Government Agency*</u>
a Texas Solid Waste Disposal Act	<u>8-15-80</u>	<u>TDWR</u>
b Wastewater disposal under the Texas Water Code	<u>01044</u>	<u>TDWR</u>
c Underground injection under the Texas Water Code	<u>None</u>	<u>_____</u>
d Texas Clean Air Act	<u>None</u>	<u>_____</u>
e Texas Uranium Surface Mining & Reclamation Act	<u>None</u>	<u>_____</u>
f Texas Surface Coal Mining & Reclamation Act	<u>None</u>	<u>_____</u>
g Hazardous Waste Management program under the Resource Conservation and Recovery Act	<u>8-15-80</u>	<u>EPA</u>

h	UIC program under the Safe Drinking Water Act	<u>None</u>	<u></u>
i	NPDES program under the Clean Water Act	<u>TX0006432</u>	<u>EPA</u>
j	PSD program under the Clean Air Act	<u>None</u>	<u></u>
k	Nonattainment program under the Clean Air Act	<u>None</u>	<u></u>
l	National Emission Standards for Hazardous Pollutants (NESHAPS) preconstruction approval under the Clean Air Act	<u>None</u>	<u></u>
m	Ocean dumping permits under the Marine Protection Research and Sanctuaries Act	<u>None</u>	<u></u>
n	Dredge or fill permits under section 404 of the Clean Water Act	<u>None</u>	<u></u>
o	Other relevant environmental permits	<u>None</u>	<u></u>

* Use the following acronyms for each agency as shown below

TDWR = Texas Department of Water Resources
TACB = Texas Air Control Board
TRC = Texas Railroad Commission
TDH = Texas Department of Health
TDA = Texas Department of Agriculture
EPA = U S Environmental Protection Agency
CORPS = U S Army Corps of Engineers

G Description of Business

1 Give a brief description of the nature of your business

Electrical Power Generation

2 List the principal products and/or services which are provided by your plant Please itemize by Standard Industrial Classification (SIC) codes

4911 Electrical Power Services

I, R M McCuiston, Vice-President
(Name) (Title)
I, _____, _____
(Name) (Title)

Certify under penalty of law that I have personally examined and am familiar with the information submitted in this document and all attachments and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the information is true, accurate, and complete

Signature R M McCuiston, Date 8-15-80
Signature _____, Date _____

SUBSCRIBED AND SWORN to before me by the said R M McCuiston
_____ on this 15th day of August, 19 80
My commission expires on the 7th day of March, 19 84

Debra R Blackburn
Notary Public in and for

Harris County, Texas

FEE PAID

II SITE BACKGROUND INFORMATION

A Location of Site

- 1 Facility Name Webster Generating Station
Street Address, if available 19301 State Hwy 3
Webster, Texas County Harris
- 2 Are your waste management operations within the extraterritorial jurisdiction of a municipality?
X Yes No
If you checked "yes," what municipality? City of Webster
- 3 Give a verbal description of the location of the facility site with respect to known or easily identifiable landmarks
Located approximately 25 miles southeast of Houston, immediately outside the town of Webster, along US Highway 3
- 4 Detail the access routes from the nearest U S or State Highway to the facility site
S H 3 South of Webster, Texas
- 5 Submit as "Attachment A" a United States Geological Survey (USGS), 7½ minute quadrangle map. Indicate on this map the location of the site and the land use patterns of the areas within 1 mile (1.6 km) of the site boundaries (e.g., residential, commercial, recreational, agricultural, undeveloped, etc.). Each area of land use should be labeled on the map. (Note: if such a map is not available, submit a substitute map such as a State Department of Highways and Public Transportation county map with sufficient scale to adequately show the site location and surrounding land use patterns.)
- 6 a Submit as "Attachment B" a map indicating the boundaries of all adjacent parcels of land, and a list of the names and mailing addresses of all adjacent landowners and other nearby landowners who might consider themselves affected by the activities described by this application. Cross-reference this list to the map through the use of appropriate keying techniques. The map should be a USGS map, a city or county plat, or another map or drawing with a scale adequate enough to show the cross-referenced affected landowners.

- b. Indicate from what source(s) the names and addresses of persons identified as affected were obtained.

City _____
County X _____
School District _____
Water District _____
Abstract Co _____
Other (specify) _____

7 Enter the geographical coordinates of the site

Latitude N29 deg 31 min 47 sec

Longitude W95 deg 06 min 10 sec

8 Is the facility located on Indian lands? Check one

 Yes X No

B Legal Description of Site

Submit as "Attachment C" a legal description of the entire tract of land upon which the waste management operations referred to in this permit application occur or will occur

C Site Environmental and Technical Information

I Climatic and Hydrologic

- a Is any portion of your waste management facility site (including proposed, active, and inactive portions) subject to flooding from adjacent or nearby surface water bodies under the following conditions?

<u>24-hr Rainfall Event</u>	<u>Yes</u>	<u>No</u>
5-year	<u> </u>	<u>X</u>
50-year	<u> </u>	<u>X</u>
100-year	<u>X</u>	<u> </u>

- b Are there any producing groundwater wells on your site property?

X Yes No

If you checked "yes,"

(1) Indicate the number of such wells two (2), and

(2) Indicate the corresponding water uses below:

(a) Industrial uses

Cooling water _____
Process water X
Fire-control water _____

(b) Potable (drinking) water _____

(c) Agricultural uses

Irrigation water for livestock food crops or grazing
land _____

Livestock watering _____
Irrigation water for human food crops _____

c Are any adjacent or nearby surface waters utilized by the applicant?

 X Yes No

If you checked "yes," indicate the corresponding water uses below

(1) Industrial uses

Cooling water X
Process water X
Fire-control water X

(2) Potable (drinking) water _____

(3) Agricultural uses

Irrigation water for livestock food crops or grazing
land _____

Livestock watering _____
Irrigation water for human food crops _____

2 Site Land Use and Subsidence Information

a Is any portion of the overall site property utilized for agricultural purposes?

 Yes X No

If you checked "yes," indicate the corresponding uses below

(1) Grazing _____
(2) Livestock food crop _____
(3) Human food crop _____

If you checked no (2) or (3), specify the types of crops grown _____

b Is any portion of the overall site property subject to land subsidence?

 X Yes No

If you checked "yes," estimate the magnitude of the greatest subsidence that has occurred (in units of feet) 0 8 ft (1973-1978)

III WASTES AND WASTE MANAGEMENT

A Waste Generation and Management Activities

Is any hazardous industrial solid waste (see Title 40, Code of Federal Regulations, Part 261) presently or proposed to be generated at your facility?

X Yes No

If you checked "no," go to Section III B 2 below

If you checked "yes," answer the following question

1 Are you presently registered with TDWR as a solid waste generator?

X Yes No

If you checked "no," contact the Solid Waste Section of TDWR in Austin, Texas to obtain registration information Also, continue with the application form (go to Number 2 below)

If you checked "yes," go to Section I of your Notice of Registration, determine which of your wastes are hazardous, and list these wastes (and mixtures) in Table III-1 (see Number 2 below)

2 Complete Table III-1 below, listing all hazardous wastes and all mixtures containing any hazardous waste which are presently or proposed to be generated at your facility (see 40 CFR 261 31-33), attaching additional copies as necessary

In this table, "TDWR Sequence Number" refers to the number in the left-hand column in Section I of your Notice of Registration (Note if you are not registered with TDWR, enter "NA" for TDWR Sequence Number and TDWR Waste Code Number)

For the EPA Hazard Code and EPA Hazardous Waste Numbers, see 40 CFR 261 30-33 For annual quantity, provide the amount in units of pounds (as generated) for each waste and/or waste mixture

Please group the listings of wastes by SIC code, insofar as your processes are designated by SIC codings Also, within the general SIC code groups, give a brief description of the specific process or operation from which the waste has been generated

B Waste Management Facilities Summary

1 For each waste and waste mixture listed in Table III-1 that is presently or proposed to be managed on-site, provide the summary sheet shown in Table III-2 (Note you must make copies of Table III-2 and submit the completed set of tables as "Attachment D")

Webster Chemical Company - Union

Table III Generated Hazardous Wastes and Management Activities

Verbal Description of Waste	TOWN Sequence Number	TOWN Waste Code Number	HA Hazard Code	HA Hazardous Waste No.	Off Site Disposal	Waste Management Activities (Check applicable items)			Annual Quantity Generated (lbs)	SIC Code and Process
						Storage ¹	On Site Processing ²	Disposal		
Demineralizer Regenerant	NA	NA	1	D002		X	X		81,532,000*	
Demineralizer Regenerant Inorganic Sludge	2	140540	1		X	X			**	
Metal Cleaning Organic Acids	NA	NA	1	D002 / D002		X	X		18,287,000*	
Metal Cleaning & Other Inorganic Sludge	2	140540	1		X	X			**	
Metal Cleaning Organic Acids	NA	NA	1		X	X	X		2,752,500*	
Metal Cleaning Organic Sludge	NA	118990	1		X	X			**	
Chemical Waste Treatment System Sludge	NA	NA	1	D002	X	X	X		243,000	
Waste Oil & Sludge	✓	110450	1	D0	X	X	X		12,000	
Degreasing and Paint Solvents	NA	NA	1	D003	X	X			9,700	
Asbestos in insulation	NA	170750	1	D013	X	X	X		3,600***	

*Untreated amounts, normally treated and discharged under wastewater permits

**Unknown small amount

*** Actual percent asbestos content is variable but small

¹ Storage means the interim containment or control of waste after generation and prior to ultimate disposal

² Processing means the extraction of materials, transfer, volume reduction, conversion to energy, or other separation and preparation of solid waste for reuse or disposal, including the treatment or neutralization of hazardous waste so as to render such waste nonhazardous, safer for transport, amenable for recovery, amenable for storage, or reduced volume. The transfer of solid waste for reuse or disposal as used above does not include the actions of a carrier in conveying or transporting solid waste by truck, ship, pipeline, or other means.

- 2 Has the applicant at any time conducted the on-site storage, processing, or disposal of industrial solid waste now identified or listed as hazardous waste?

X Yes _____ No

If you checked "yes," complete Table III-3 indicating the hazardous industrial solid waste management facility components which were once utilized at your plant site but are no longer in service (i.e., inactive facility components)

If you checked "no," and if no hazardous industrial solid waste is presently or proposed to be generated or managed at your facility, then you need not file this permit application. Otherwise, proceed with application form

- 3 For each facility component indicated in Table III-2 (Attachment D) and Table III-3, complete the following Table III-4 attaching additional copies as necessary. Enter the name of each facility component as specified in the earlier tables

Give the design capacity of each facility component in any of the units shown. In the case of inactive facilities for which design details are unavailable, an estimate of the design capacity is sufficient

Please note that each facility component should be described in your own words on the line provided for "verbal description"

- 4 Provide an estimate of the total weight (lbs) of hazardous industrial solid waste material that has been disposed of and/or stored within your site boundaries and not removed to another site

C Location of Waste Management Facilities and Components

- 1 Submit as "Attachment E" a drawn-to-scale topographic map (or other map if a topographic map is unavailable) extending one mile (and only one mile) beyond the property boundaries of the overall plant site, depicting the following

- a The approximate boundaries of the site (described in Section II B) and within these boundaries, the location and boundaries of the areas occupied by each active, inactive, and proposed facility component (see Tables III-2 and III-3 for facility components). Each depicted area should be labeled to identify the facility component(s), component status (i.e., active, inactive, or proposed), and area size in acres

[illegible][illegible]

1. **Identify the problem.** The first step in the problem-solving process is to identify the problem. This involves recognizing the issue, gathering information, and defining the problem clearly.

[illegible]

THE UNIVERSITY OF CHICAGO

12-11-68

Abstract—The purpose of this study was to determine if there were differences in the prevalence of musculoskeletal disorders among different types of workers. The study included 600 male employees from three companies who had been employed by their respective companies for at least one year. Data were collected through a self-administered questionnaire that asked about various factors related to work and health. The results showed that the prevalence of musculoskeletal disorders was higher among workers in the manufacturing sector compared to those in the service sector. This finding suggests that certain types of work may be more likely to lead to musculoskeletal problems than others.

11-11-1964

THE UNIVERSITY OF CHICAGO

Всего в течение года было отобрано 60-70 тысяч экземпляров.

THE UNIVERSITY OF CHICAGO

11-11-1964

THE UNIVERSITY OF CHICAGO PRESS

THE UNIVERSITY OF CHICAGO

THE UNIVERSITY OF CHICAGO

100

APPENDIX 1

100

1990

1997, 1998, 1999, 2000, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2030, 2031, 2032, 2033, 2034, 2035, 2036, 2037, 2038, 2039, 2040, 2041, 2042, 2043, 2044, 2045, 2046, 2047, 2048, 2049, 2050, 2051, 2052, 2053, 2054, 2055, 2056, 2057, 2058, 2059, 2060, 2061, 2062, 2063, 2064, 2065, 2066, 2067, 2068, 2069, 2070, 2071, 2072, 2073, 2074, 2075, 2076, 2077, 2078, 2079, 2080, 2081, 2082, 2083, 2084, 2085, 2086, 2087, 2088, 2089, 2090, 2091, 2092, 2093, 2094, 2095, 2096, 2097, 2098, 2099, 2100, 2101, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2114, 2115, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2125, 2126, 2127, 2128, 2129, 2130, 2131, 2132, 2133, 2134, 2135, 2136, 2137, 2138, 2139, 2140, 2141, 2142, 2143, 2144, 2145, 2146, 2147, 2148, 2149, 2150, 2151, 2152, 2153, 2154, 2155, 2156, 2157, 2158, 2159, 2160, 2161, 2162, 2163, 2164, 2165, 2166, 2167, 2168, 2169, 2170, 2171, 2172, 2173, 2174, 2175, 2176, 2177, 2178, 2179, 2180, 2181, 2182, 2183, 2184, 2185, 2186, 2187, 2188, 2189, 2190, 2191, 2192, 2193, 2194, 2195, 2196, 2197, 2198, 2199, 2200, 2201, 2202, 2203, 2204, 2205, 2206, 2207, 2208, 2209, 2210, 2211, 2212, 2213, 2214, 2215, 2216, 2217, 2218, 2219, 2220, 2221, 2222, 2223, 2224, 2225, 2226, 2227, 2228, 2229, 2230, 2231, 2232, 2233, 2234, 2235, 2236, 2237, 2238, 2239, 2240, 2241, 2242, 2243, 2244, 2245, 2246, 2247, 2248, 2249, 2250, 2251, 2252, 2253, 2254, 2255, 2256, 2257, 2258, 2259, 2260, 2261, 2262, 2263, 2264, 2265, 2266, 2267, 2268, 2269, 2270, 2271, 2272, 2273, 2274, 2275, 2276, 2277, 2278, 2279, 2280, 2281, 2282, 2283, 2284, 2285, 2286, 2287, 2288, 2289, 2290, 2291, 2292, 2293, 2294, 2295, 2296, 2297, 2298, 2299, 2300, 2301, 2302, 2303, 2304, 2305, 2306, 2307, 2308, 2309, 2310, 2311, 2312, 2313, 2314, 2315, 2316, 2317, 2318, 2319, 2320, 2321, 2322, 2323, 2324, 2325, 2326, 2327, 2328, 2329, 2330, 2331, 2332, 2333, 2334, 2335, 2336, 2337, 2338, 2339, 2340, 2341, 2342, 2343, 2344, 2345, 2346, 2347, 2348, 2349, 2350, 2351, 2352, 2353, 2354, 2355, 2356, 2357, 2358, 2359, 2360, 2361, 2362, 2363, 2364, 2365, 2366, 2367, 2368, 2369, 2370, 2371, 2372, 2373, 2374, 2375, 2376, 2377, 2378, 2379, 2380, 2381, 2382, 2383, 2384, 2385, 2386, 2387, 2388, 2389, 2390, 2391, 2392, 2393, 2394, 2395, 2396, 2397, 2398, 2399, 2400, 2401, 2402, 2403, 2404, 2405, 2406, 2407, 2408, 2409, 2410, 2411, 2412, 2413, 2414, 2415, 2416, 2417, 2418, 2419, 2420, 2421, 2422, 2423, 2424, 2425, 2426, 2427, 2428, 2429, 2430, 2431, 2432, 2433, 2434, 2435, 2436, 2437, 2438, 2439, 2440, 2441, 2442, 2443, 2444, 2445, 2446, 2447, 2448, 2449, 2450, 2451, 2452, 2453, 2454, 2455, 2456, 2457, 2458, 2459, 2460, 2461, 2462, 2463, 2464, 2465, 2466, 2467, 2468, 2469, 2470, 2471, 2472, 2473, 2474, 2475, 2476, 2477, 2478, 2479, 2480, 2481, 2482, 2483, 2484, 2485, 2486, 2487, 2488, 2489, 2490, 2491, 2492, 2493, 2494, 2495, 2496, 2497, 2498, 2499, 2500, 2501, 2502, 2503, 2504, 2505, 2506, 2507, 2508, 2509, 2510, 2511, 2512, 2513, 2514, 2515, 2516, 2517, 2518, 2519, 2520, 2521, 2522, 2523, 2524, 2525, 2526, 2527, 2528, 2529, 2530, 2531, 2532, 2533, 2534, 2535, 2536, 2537, 2538, 2539, 2540, 2541, 2542, 2543, 2544, 2545, 2546, 2547, 2548, 2549, 2550, 2551, 2552, 2553, 2554, 2555, 2556, 2557, 2558, 2559, 2560, 2561, 2562, 2563, 2564, 2565, 2566, 2567, 2568, 2569, 2570, 2571, 2572, 2573, 2574, 2575, 2576, 2577, 2578, 2579, 2580, 2581, 2582, 2583, 2584, 2585, 2586, 2587, 2588, 2589, 2590, 2591, 2592, 2593, 2594, 2595, 2596, 2597, 2598, 2599, 2600, 2601, 2602, 2603, 2604, 2605, 2606, 2607, 2608, 2609, 2610, 2611, 2612, 2613, 2614, 2615, 2616, 2617, 2618, 2619, 2620, 2621, 2622, 2623, 2624, 2625, 2626, 2627, 2628, 2629, 2630, 2631, 2632, 2633, 2634, 2635, 2636, 2637, 2638, 2639, 2640, 2641, 2642, 2643, 2644, 2645, 2646, 2647, 2648, 2649, 2650, 2651, 2652, 2653, 2654, 2655, 2656, 2657, 2658, 2659, 2660, 2661, 2662, 2663, 2664, 2665, 2666, 2667, 2668, 2669, 2670, 2671, 2672, 2673, 2674, 2675, 2676, 2677, 2678, 26



1000



1997, 1998, 1999, 2000, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025, 2026, 2027, 2028, 2029, 2030, 2031, 2032, 2033, 2034, 2035, 2036, 2037, 2038, 2039, 2040, 2041, 2042, 2043, 2044, 2045, 2046, 2047, 2048, 2049, 2050, 2051, 2052, 2053, 2054, 2055, 2056, 2057, 2058, 2059, 2060, 2061, 2062, 2063, 2064, 2065, 2066, 2067, 2068, 2069, 2070, 2071, 2072, 2073, 2074, 2075, 2076, 2077, 2078, 2079, 2080, 2081, 2082, 2083, 2084, 2085, 2086, 2087, 2088, 2089, 2090, 2091, 2092, 2093, 2094, 2095, 2096, 2097, 2098, 2099, 2100, 2101, 2102, 2103, 2104, 2105, 2106, 2107, 2108, 2109, 2110, 2111, 2112, 2113, 2114, 2115, 2116, 2117, 2118, 2119, 2120, 2121, 2122, 2123, 2124, 2125, 2126, 2127, 2128, 2129, 2130, 2131, 2132, 2133, 2134, 2135, 2136, 2137, 2138, 2139, 2140, 2141, 2142, 2143, 2144, 2145, 2146, 2147, 2148, 2149, 2150, 2151, 2152, 2153, 2154, 2155, 2156, 2157, 2158, 2159, 2160, 2161, 2162, 2163, 2164, 2165, 2166, 2167, 2168, 2169, 2170, 2171, 2172, 2173, 2174, 2175, 2176, 2177, 2178, 2179, 2180, 2181, 2182, 2183, 2184, 2185, 2186, 2187, 2188, 2189, 2190, 2191, 2192, 2193, 2194, 2195, 2196, 2197, 2198, 2199, 2200, 2201, 2202, 2203, 2204, 2205, 2206, 2207, 2208, 2209, 2210, 2211, 2212, 2213, 2214, 2215, 2216, 2217, 2218, 2219, 2220, 2221, 2222, 2223, 2224, 2225, 2226, 2227, 2228, 2229, 2230, 2231, 2232, 2233, 2234, 2235, 2236, 2237, 2238, 2239, 2240, 2241, 2242, 2243, 2244, 2245, 2246, 2247, 2248, 2249, 2250, 2251, 2252, 2253, 2254, 2255, 2256, 2257, 2258, 2259, 2260, 2261, 2262, 2263, 2264, 2265, 2266, 2267, 2268, 2269, 2270, 2271, 2272, 2273, 2274, 2275, 2276, 2277, 2278, 2279, 2280, 2281, 2282, 2283, 2284, 2285, 2286, 2287, 2288, 2289, 2290, 2291, 2292, 2293, 2294, 2295, 2296, 2297, 2298, 2299, 2300, 2301, 2302, 2303, 2304, 2305, 2306, 2307, 2308, 2309, 2310, 2311, 2312, 2313, 2314, 2315, 2316, 2317, 2318, 2319, 2320, 2321, 2322, 2323, 2324, 2325, 2326, 2327, 2328, 2329, 2330, 2331, 2332, 2333, 2334, 2335, 2336, 2337, 2338, 2339, 2340, 2341, 2342, 2343, 2344, 2345, 2346, 2347, 2348, 2349, 2350, 2351, 2352, 2353, 2354, 2355, 2356, 2357, 2358, 2359, 2360, 2361, 2362, 2363, 2364, 2365, 2366, 2367, 2368, 2369, 2370, 2371, 2372, 2373, 2374, 2375, 2376, 2377, 2378, 2379, 2380, 2381, 2382, 2383, 2384, 2385, 2386, 2387, 2388, 2389, 2390, 2391, 2392, 2393, 2394, 2395, 2396, 2397, 2398, 2399, 2400, 2401, 2402, 2403, 2404, 2405, 2406, 2407, 2408, 2409, 2410, 2411, 2412, 2413, 2414, 2415, 2416, 2417, 2418, 2419, 2420, 2421, 2422, 2423, 2424, 2425, 2426, 2427, 2428, 2429, 2430, 2431, 2432, 2433, 2434, 2435, 2436, 2437, 2438, 2439, 2440, 2441, 2442, 2443, 2444, 2445, 2446, 2447, 2448, 2449, 2450, 2451, 2452, 2453, 2454, 2455, 2456, 2457, 2458, 2459, 2460, 2461, 2462, 2463, 2464, 2465, 2466, 2467, 2468, 2469, 2470, 2471, 2472, 2473, 2474, 2475, 2476, 2477, 2478, 2479, 2480, 2481, 2482, 2483, 2484, 2485, 2486, 2487, 2488, 2489, 2490, 2491, 2492, 2493, 2494, 2495, 2496, 2497, 2498, 2499, 2500, 2501, 2502, 2503, 2504, 2505, 2506, 2507, 2508, 2509, 2510, 2511, 2512, 2513, 2514, 2515, 2516, 2517, 2518, 2519, 2520, 2521, 2522, 2523, 2524, 2525, 2526, 2527, 2528, 2529, 2530, 2531, 2532, 2533, 2534, 2535, 2536, 2537, 2538, 2539, 2540, 2541, 2542, 2543, 2544, 2545, 2546, 2547, 2548, 2549, 2550, 2551, 2552, 2553, 2554, 2555, 2556, 2557, 2558, 2559, 2560, 2561, 2562, 2563, 2564, 2565, 2566, 2567, 2568, 2569, 2570, 2571, 2572, 2573, 2574, 2575, 2576, 2577, 2578, 2579, 2580, 2581, 2582, 2583, 2584, 2585, 2586, 2587, 2588, 2589, 2590, 2591, 2592, 2593, 2594, 2595, 2596, 2597, 2598, 2599, 2600, 2601, 2602, 2603, 2604, 2605, 2606, 2607, 2608, 2609, 2610, 2611, 2612, 2613, 2614, 2615, 2616, 2617, 2618, 2619, 2620, 2621, 2622, 2623, 2624, 2625, 2626, 2627, 2628, 2629, 2630, 2631, 2632, 2633, 2634, 2635, 2636, 2637, 2638, 2639, 2640, 2641, 2642, 2643, 2644, 2645, 2646, 2647, 2648, 2649, 2650, 2651, 2652, 2653, 2654, 2655, 2656, 2657, 2658, 2659, 2660, 2661, 2662, 2663, 2664, 2665, 2666, 2667, 2668, 2669, 2670, 2671, 2672, 2673, 2674, 2675, 2676, 2677, 2678, 26

100

100

100

Table III-4 Hazardous Waste Facility Components List

Facility Component		Status			Design Capacity			Number of Years Utilized	Date in Service
Name	TDWR Seq No	Inactive	Active	Proposed	(cu yds)	(gal)	(lbs)		
Lagoon/ Pond (lined)			X			372,000		10	1970
Verbal Description Clay lined pond for the collection & equalization of demineralizer regeneration wastes prior to treatment Sludge accumulated at pond bottom periodically removed for off-site disposal									
*Tank (Surface Processing)			X			8,600		3	1977
Verbal Description Treatment system (Surface processing) for neutralization consists of one (1) mixing chamber (300 gallon) one (1) flocculation chamber (1100 gallon), one (1) settling chamber (6900 gallon) and one (1) pH readjustment chamber (300 gallon)									
Lagoon/Pond (lined)			X			270,000		3	1977
Verbal Description Clay lined pond for the collection of metal cleaning inorganic acid wastes from boiler & equipment cleaning operations prior to treatment Sludge accumulated at pond bottom periodically removed for off-site disposal									
Lagoon/Pond (lined)			X			270,000		10	1970
Verbal Description Clay lined pond for the collection of metal cleaning organic acids from boiler cleaning operations prior to off-site treatment Sludge accumulated at pond bottom periodically removed for off-site disposal									
Basin (earthen, below-grade lined)			X			1790 (ea)		3	1977
Verbal Description Two clay lined sand drying beds for the collection & processing of sludge from the chemical waste treatment system and oily waste treatment system Dried sludge is periodically removed for off-site disposal									
Tank (surface storage)			X			3,000		3	1977
Verbal Description Chamber used for the collection of waste oil & sludge which is accumulated from the oily waste treatment system This waste is periodically trucked off-site for disposal or is transferred to the sludge drying beds									

*Chemical Waste Treatment System

Facility Component Name	FDWM ID No.	Location	Material X	Proposed (cu yd)	Design Capacity (gal)	Design Capacity (lbs)	Number of Years Utilized	Date in Service
Other			X	NA	NA	NA	NA	NA
Verbal Description Asbestos used for insulation will be placed in bags and wet down prior to off-site disposal								
Actual percent asbestos content is variable but small								
Drum Storage Area (other)			X	NA	NA	NA	NA	NA
Verbal Description Drum storage area for the collection of waste solvents used in degreasing and painting operations prior to off-site disposal								
Verbal Description								
Verbal Description								
Verbal Description								
Verbal Description								
Verbal Description								
Verbal Description								

4. The following information is provided for the year ended 31/12/2019:

FILE	DESCRIPTION	DATE	TIME	STATUS
FILE 1
FILE 2
FILE 3
FILE 4
FILE 5
FILE 6
FILE 7
FILE 8
FILE 9
FILE 10
FILE 11
FILE 12
FILE 13
FILE 14
FILE 15
FILE 16
FILE 17
FILE 18
FILE 19
FILE 20
FILE 21
FILE 22
FILE 23
FILE 24
FILE 25
FILE 26
FILE 27
FILE 28
FILE 29
FILE 30
FILE 31
FILE 32
FILE 33
FILE 34
FILE 35
FILE 36
FILE 37
FILE 38
FILE 39
FILE 40
FILE 41
FILE 42
FILE 43
FILE 44
FILE 45
FILE 46
FILE 47
FILE 48
FILE 49
FILE 50
FILE 51
FILE 52
FILE 53
FILE 54
FILE 55
FILE 56
FILE 57
FILE 58
FILE 59
FILE 60
FILE 61
FILE 62
FILE 63
FILE 64
FILE 65
FILE 66
FILE 67
FILE 68
FILE 69
FILE 70
FILE 71
FILE 72
FILE 73
FILE 74
FILE 75
FILE 76
FILE 77
FILE 78
FILE 79
FILE 80
FILE 81
FILE 82
FILE 83
FILE 84
FILE 85
FILE 86
FILE 87
FILE 88
FILE 89
FILE 90
FILE 91
FILE 92
FILE 93
FILE 94
FILE 95
FILE 96
FILE 97
FILE 98
FILE 99
FILE 100

ENVIRONMENTAL PROTECTION AGENCY EPA GENERAL INFORMATION (Read the "General Instructions" before starting.)		EPA FORM NUMBER FTXD0000837369	
PLEASE PLACE LABEL IN THIS SPACE		GENERAL INSTRUCTIONS If a preprinted label has been provided for the designated space, please use it. If not, use the space provided for the label. The label should appear on the front of the form, not on the back. The label should be placed in the space provided for the label. The label should be placed in the space provided for the label.	
II. POLLUTANT CHARACTERISTICS			
INSTRUCTIONS: Complete A through F, depending whether you need to submit any permit application to the EPA. If you are a permit applicant, you must submit this form and the supplemental form listed in the parentheses following the question. If you are not a permit applicant, you must submit this form and the supplemental form listed in the parentheses following the question. If you are not a permit applicant, you must submit this form and the supplemental form listed in the parentheses following the question.			
A. Is this facility a publicly owned treatment works which results in a discharge to waters of the U.S.? (FORM 2A)	<input checked="" type="checkbox"/>	B. Does or will this facility treat, store, or dispose of hazardous waste? (FORM 2B)	<input checked="" type="checkbox"/>
C. Is this a facility which currently results in discharges to waters of the U.S. other than those described in A or B above? (FORM 2C)	<input checked="" type="checkbox"/>	D. Do you or will you inject at this facility any produced water or other fluids which are brought to the surface in connection with conventional oil or natural gas production, inject fluids used for enhanced recovery of oil or natural gas, or other fluids in a process of fluid hydrocarbons? (FORM 4)	<input checked="" type="checkbox"/>
E. Is this facility a proposed stationary source which is one of the 28 industrial categories listed in the instructions and which will potentially emit 100 tons per year of any air pollutant regulated under the Clean Air Act and may affect or be located in an attainment area? (FORM 5)	<input checked="" type="checkbox"/>	F. Is this a proposed facility (other than a residential or agricultural facility) which will result in a discharge to waters of the U.S.? (FORM 2D)	<input checked="" type="checkbox"/>
III. NAME OF FACILITY 1 WEBSTER GENERATING STATION			
IV. FACILITY CONTACT 2 MCGUIRE, W F MANAGER ENVIRON 713 481 7445			
V. FACILITY MAILING ADDRESS 3 P O BOX 1700 4 HOUSTON TX 77001			
VI. FACILITY LOCATION 5 19301 OLD GAVESTON ROAD 6 HARRIS 7 WEBSTER TX 77598			

4.9.1.1 STEAM ELECTRIC POWER

(specify)

(specify)

(specify)

HOUSTON LIGHTING & POWER COMPANY

P

(specify)

713 481 7145

P O BOX 1700

HOUSTON

TX 77001

TX 0006432

01044

(specify)

TEXAS DEPT OF WATER RESOURCES

(specify)

STEAM ELECTRIC POWER PRODUCTION

A. NAME & OFFICIAL TITLE (type or print)

R M McCUISTION
VICE PRESIDENT

B. SIGNATURE

R M McCUISTION

C. DATE SIGNED

11-18-80

FORM 3 RCRA		U.S. ENVIRONMENTAL PROTECTION AGENCY	EPA I.D. NUMBER														
		HAZARDOUS WASTE PERMIT APPLICATION <i>Consolidated Permits Program</i>	<table border="1"> <tr> <td>F</td><td>T</td><td>X</td><td>D</td><td>0</td><td>0</td><td>0</td><td>8</td><td>3</td><td>7</td><td>3</td><td>6</td><td>9</td> <td>P</td><td>A</td><td>C</td> </tr> </table>	F	T	X	D	0	0	0	8	3	7	3	6	9	P
F	T	X	D	0	0	0	8	3	7	3	6	9	P	A	C		
(This information is required under Section 3005 of RCRA.)																	

FOR OFFICIAL USE ONLY

APPLICATION APPROVED		DATE RECEIVED (yr, mo, & day)		COMMENTS

II. FIRST OR REVISED APPLICATION

Place an "X" in the appropriate box in A or B below (mark one box only) to indicate whether this is the first application you are submitting for your facility or a revised application. If this is your first application and you already know your facility's EPA I.D. Number, or if this is a revised application, enter your facility's EPA I.D. Number in item 1 above.

A FIRST APPLICATION (place an "X" below and provide the appropriate date)

1. EXISTING FACILITY (See instructions for definitions of "existing" facility. Complete item below.)

2. ZONE A FACILITY (Contains more than 2000 lbs.)

YR.	MO.	DAY
54	06	15
72 7	78 78	77 78

FOR EXISTING FACILITIES, PROVIDE THE DATE (YR., MO., & DAY) OPERATION BEGAN ON THE DATE CONSTRUCTION COMMENCED (use the boxes to the left)

YR.	MO.	DAY
72 78	78 78	77 78

PROVIDE THE DATE (YR., MO., & DAY) OPERATION BEGAN OR IS EXPECTED TO BEGIN

REVISÉD APPLICATION (place an "X" below and complete for item I above)

1. FACILITY MAINTENANCE STATUS

2. FACILITY NAME: BERA

III. PROCESSES — CODES AND DESIGN CAPACITIES

A. PROCESS CODE — Enter the code from the list of process codes below that best describes each process to be used at the facility. Ten lines are provided for entering codes. If more lines are needed, enter the code(s) in the space provided. If a process will be used that is not included in the list of codes below, then describe the process (including its design capacity) in the space provided on the form (Item III-C).

18. PROCESS DESIGN CAPACITY — For each code entered in column A, enter the capacity of the process.

1 AMOUNT—Enter the amount.

2 UNIT OF MEASURE — For each amount entered in column (B)(1), enter the code from the list of unit measure codes below that describes the unit of measure used. Only the units of measure that are listed below should be used.

PROCESS	PROCESS CODE	APPROPRIATE UNITS OF MEASURE FOR PROCESS DESIGN CAPACITY	PROCESS	PROCESS CODE	APPROPRIATE UNITS OF MEASURE FOR PROCESS DESIGN CAPACITY
<u>Storage</u>			<u>Treatment</u>		
CONTAINER (barrel, drum, etc.)	501	GALLONS OR LITERS	TANK	701	GALLONS PER DAY OR LITERS PER DAY
TANK	502	GALLONS OR LITERS			
WASTE PILE	503	CUBIC YARDS OR CUBIC METERS	SURFACE IMPOUNDMENT	702	GALLONS PER DAY OR LITERS PER DAY
SURFACE IMPOUNDMENT	504	GALLONS OR LITERS	INCINERATOR	703	TONS PER HOUR OR METRIC TONS PER HOUR
<u>Disposal</u>					
INJECTION WELL	073	GALLONS OR LITERS			
LANDFILL	088	ACRE-FEET (the volume that would cover one acre to a depth of one foot) OR HECTARE-METER	OTHER (Use for physical, chemical, thermal or biological treatment processes not occurring in tanks, surface impoundments or incinerators. Describe the processes in the space provided, Item III-C)	704	GALLONS PER DAY OR LITERS PER DAY
LAND APPLICATION	089	ACRES OR HECTARES			
OCEAN DISPOSAL	092	GALLONS PER DAY OR LITERS PER DAY			
SURFACE IMPOUNDMENT	093	GALLONS OR LITERS			
UNIT OF MEASURE	UNIT OF MEASURE CODE	UNIT OF MEASURE	UNIT OF MEASURE CODE	UNIT OF MEASURE	UNIT OF MEASURE CODE
GALLONS	01	LITERS PER DAY	01	ACRE-FEET	01
LITERS	02	TONS PER HOUR	02	HECTARE-METER	02
CUBIC YARDS	03	METRIC TONS PER HOUR	03	ACRES	03
CUBIC METERS	04	GALLONS PER HOUR	04	HECTARES	04
GALLONS PER DAY	05	LITERS PER HOUR	05		

EXAMPLE FOR COMPLETING ITEM III (shown in line numbers 7, 8, and 9 below): A facility has two storage tanks, one tank can hold 200 gallons and the other can hold 400 gallons. The facility also has an incinerator that can burn up to 20 gallons per hour.

[illegible]

III PROCESSES (continued)

C SPACE FOR ADDITIONAL PROCESS CODES OR DESCRIBING OTHER PROCESSES (code T0) FOR EACH PROCESS ENTERED HERE
INCLUDE DESIGN CAPACITY

IV DESCRIPTION OF HAZARDOUS WASTES

A. EPA HAZARDOUS WASTE NUMBER — Enter the four-digit number from 40 CFR, Subpart D for each listed hazardous waste you will handle. If you handle hazardous wastes which are not listed in 40 CFR, Subpart D, enter the four-digit number(s) from 40 CFR, Subpart C that describes the characteristics and/or the toxic contaminants of those hazardous wastes.

B. ESTIMATED ANNUAL QUANTITY — For each listed waste entered in column A, estimate the quantity of that waste that will be handled on an annual basis. For each characteristic or toxic contaminant entered in column A, estimate the total annual quantity of all the non-listed waste(s) that will be handled which possess that characteristic or contaminant.

C. UNIT OF MEASURE — For each quantity entered in column B, enter the unit of measure code. Units of measure which must be used and the appropriate code are:

ENGLISH UNIT OF MEASURE

CODE

METRIC UNIT OF MEASURE

CODE

POUNDS PER YEAR

P

KILOGRAMS PER YEAR

K

GALLONS PER YEAR

G

METRIC TONS PER YEAR

M

If facility records use any other unit of measure for quantity, the units of measure must be converted to one of the required units of measure taking into account the appropriate density or specific gravity of the waste.

D. PROCESSES**1. PROCESS CODES**

For listed hazardous waste: For each listed hazardous waste entered in column A, select the code(s) from the list of process codes contained in Item 111 to indicate how the waste will be stored, treated, and/or disposed of at the facility.

For non-listed hazardous waste: For each characteristic or toxic contaminant entered in column A, select the code(s) from the list of process codes contained in Item 111 to indicate all the processes that will be used to store, treat, and/or dispose of all the non-listed hazardous waste that possess that characteristic or toxic contaminant.

Notes: Four spaces are provided for entering process codes. If more are needed: (1) Enter the first three as described above; (2) Enter "800" in the extreme right box of Item IV-D(1); and (3) Enter in the space provided on page 4, the line number and the additional code(s).

PROCESS DESCRIPTION: If a code is not listed for a process that will be used, describe the process in the space provided on the form.

NOTE: HAZARDOUS WASTES DESCRIBED BY MORE THAN ONE EPA HAZARDOUS WASTE NUMBER — Hazardous wastes that can be described by more than one EPA Hazardous Waste Number shall be described on the form as follows:

1. Select one of the EPA Hazardous Waste Numbers and enter it in column A. On the same line complete columns B, C, and D by estimating the total annual quantity of the waste and describing all the processes to be used to treat, store, and/or dispose of the waste.
2. In column A of the next line enter the other EPA Hazardous Waste Number that can be used to describe the waste. In column D(2) on that line enter "Included with above" and make no other entries on that line.

Repeat step 2 for each other EPA Hazardous Waste Number that can be used to describe the hazardous waste.

EXAMPLE FOR COMPLETING ITEM IV (shown in five numbers X-1, X-2, X-3, and X-4 below): A facility will treat and dispose of an estimated 900 pounds per year of chrome shavings from leather tanning and finishing operation. In addition, the facility will treat and dispose of three non-listed wastes. Two wastes are corrosive only and there will be an estimated 200 pounds per year of each waste. The other waste is corrosive and ignitable and there will be an estimated 100 pounds per year of that waste. Treatment will be in an incinerator and disposal will be in a landfill.

LINE NO.	A. EPA HAZ. WASTE NO. (enter code)				B. ESTIMATED ANNUAL QUANTITY OF WASTE	C. UNIT OF MEASURE (enter code)	D. PROCESSES							
							1. PROCESS CODES (enter)				2. PROCESS DESCRIPTION (if a code is not entered in D.(1))			
X-1	K	0	5	4	900	P	T	0	3	D	8	0		
X-2	D	0	0	2	400	P	T	0	3	D	8	0		
X-3	D	0	0	1	100	P	T	0	3	D	8	0		
X-4	D	0	0	2									included with above	

[illegible]

IV DESCRIPTION OF HAZARDOUS WASTE (continued)

USE THIS SPACE TO LIST ADDITIONAL PROCESS CODES FROM ITEM D(1) ON PAGE 3

EPA I.D. NO. (enter from page 1)												
F	T	X	D	0	0	0	8	3	7	3	6	9
TIA C												

V FACILITY DRAWING

All existing facilities must include in the space provided on page 5 a scale drawing of the facility (see instructions for more detail).

VI PHOTOGRAPHS

All existing facilities must include photographs (aerial or ground-level) that clearly delineate all existing structures, existing storage, treatment and disposal areas, and sites of future storage, treatment or disposal areas (see instructions for more detail).

VII FACILITY GEOGRAPHIC LOCATION

LATITUDE (degrees, minutes, & seconds)												LONGITUDE (degrees, minutes, & seconds)											
29 31 47												95 06 10											

VIII FACILITY OWNER

XIA. If the facility owner is also the facility operator as listed in Section VIII on Form 1, "General Information," place an "X" in the box to the left and skip to Section IX below.

B. If the facility owner is not the facility operator as listed in Section VIII on Form 1, complete the following items:

1. NAME OF FACILITY LEGAL OWNER												2. PHONE NO. (area code & no.)											
E																							
3. STREET OR P.O. BOX												4. CITY OR TOWN											
F												G											
5. STATE												6. ZIP CODE											

IX OWNER CERTIFICATION


I certify under penalty of law that I have personally examined and am familiar with the information submitted in this and all attached documents, and that based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the submitted information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment.

A. NAME (print or type) R M McCUISTION VICE PRESIDENT												B. SIGNATURE <i>R M McCuiston</i>												C. DATE SIGNED 11-18-80											
---	--	--	--	--	--	--	--	--	--	--	--	--------------------------------------	--	--	--	--	--	--	--	--	--	--	--	----------------------------	--	--	--	--	--	--	--	--	--	--	--

X OPERATOR CERTIFICATION


I certify under penalty of law that I have personally examined and am familiar with the information submitted in this and all attached documents, and that based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the submitted information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment.

A. NAME (print or type)												B. SIGNATURE												C. DATE SIGNED											

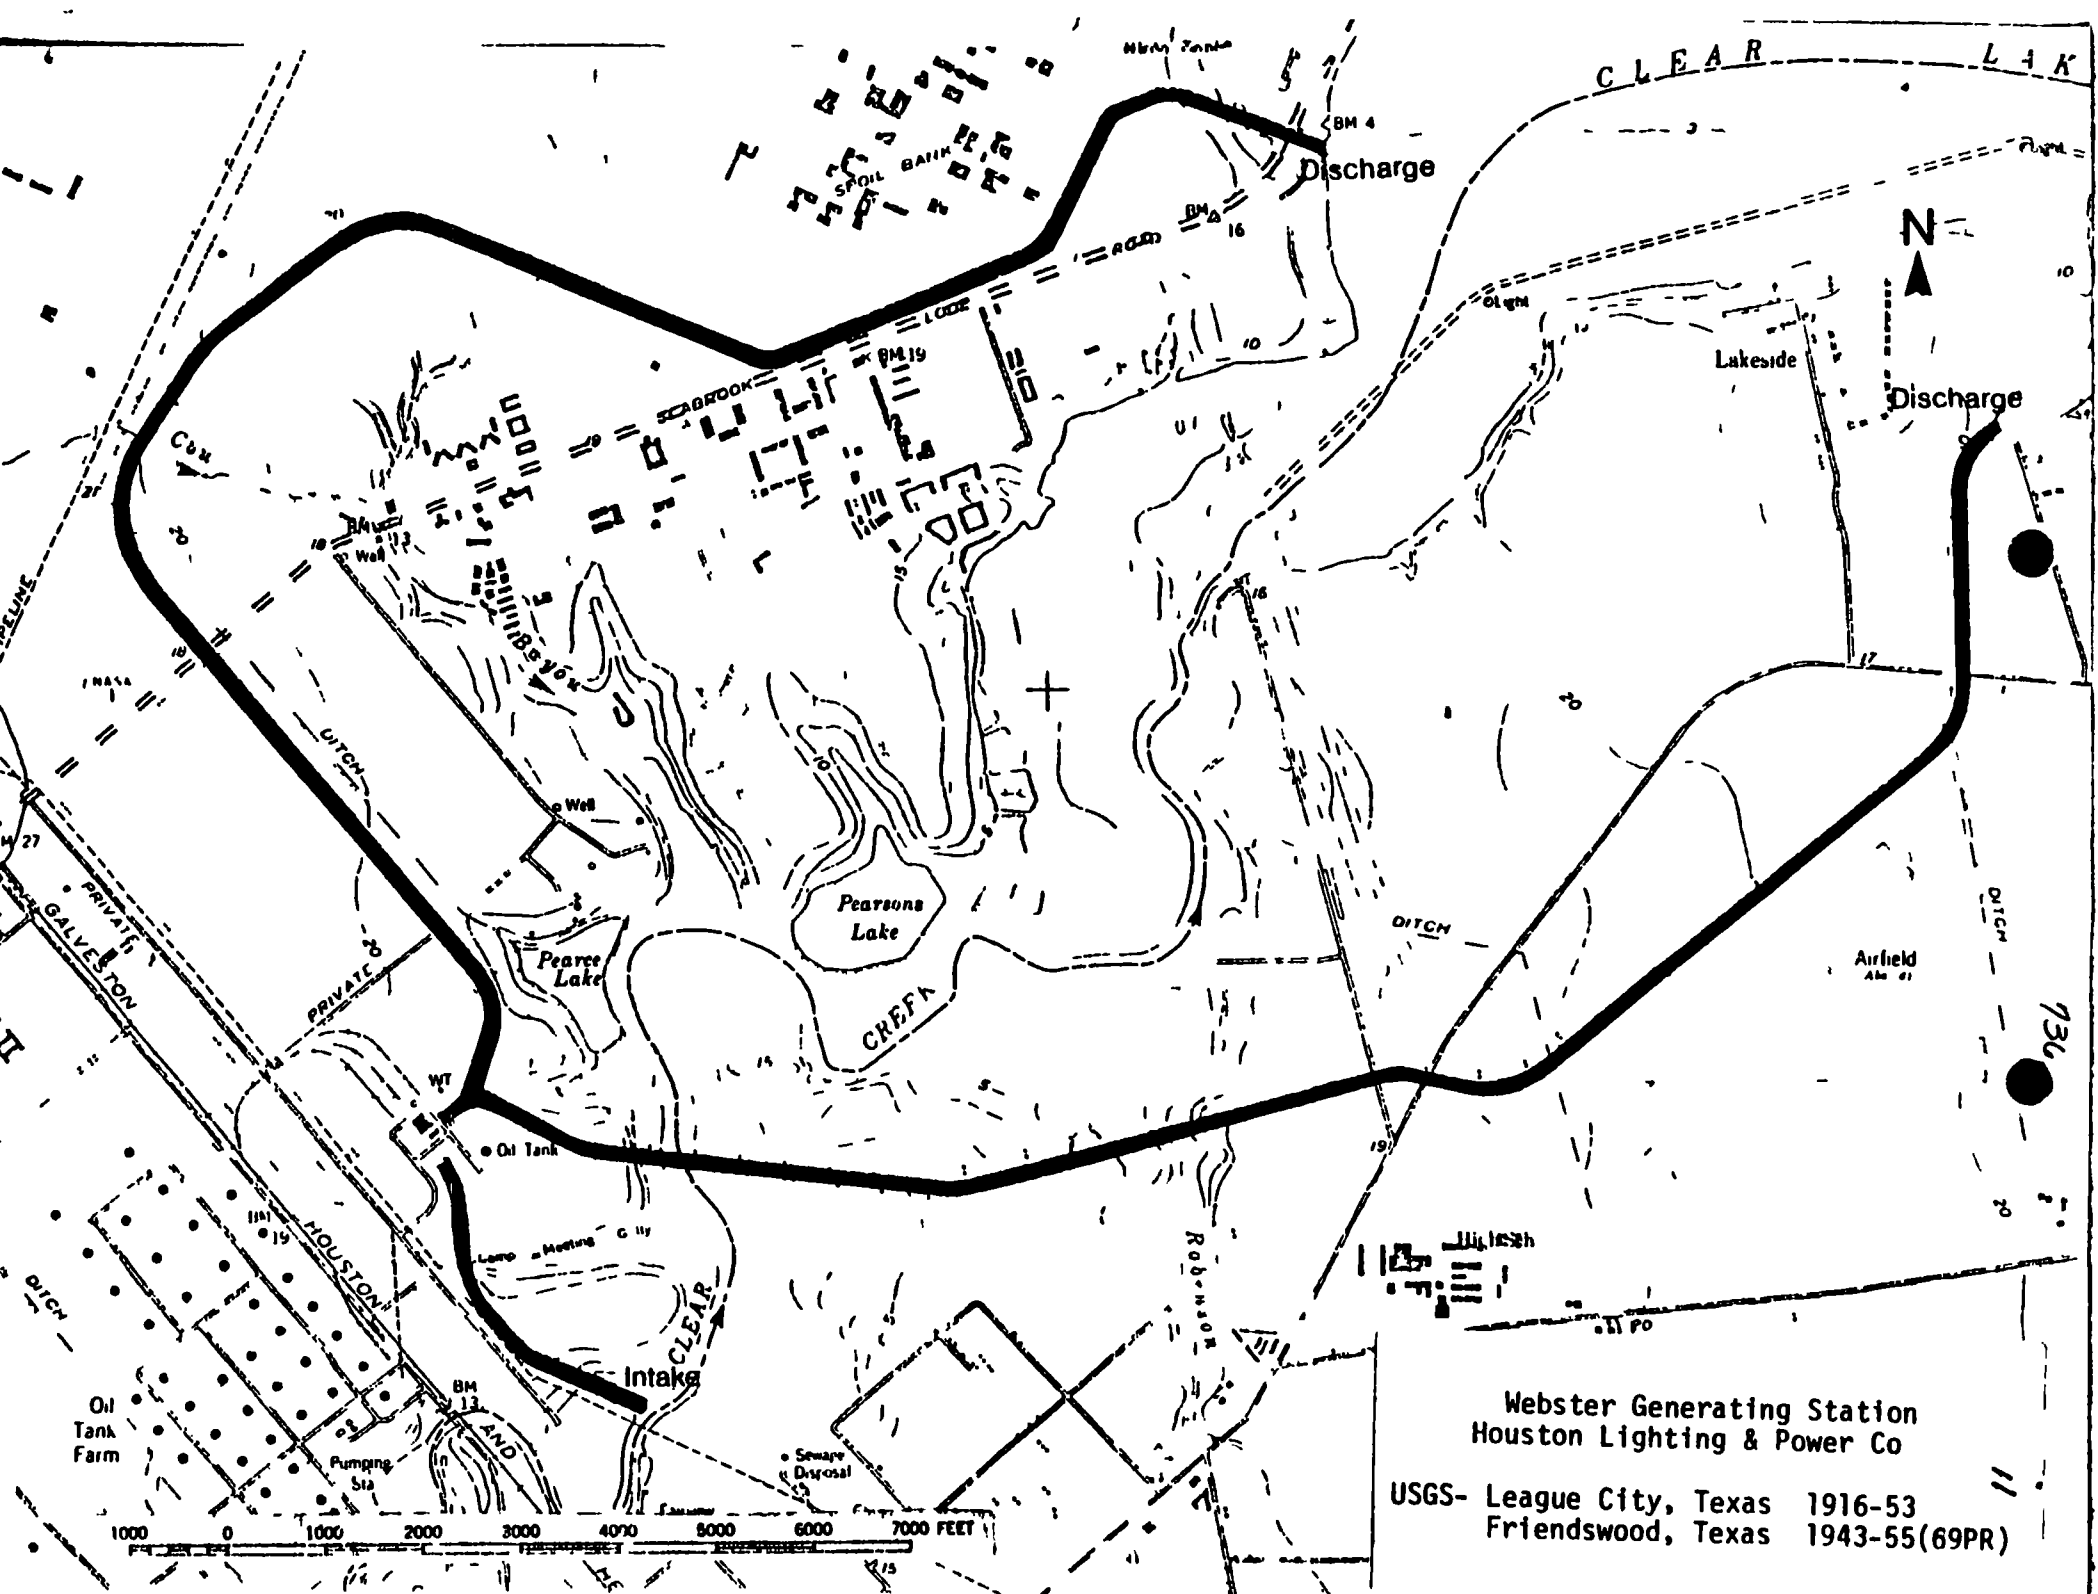

WASTE OIL & SLUDGE
COLLECTION FACILITY

SOLIDWASTE
DISPOSAL SITE
(NOT SHOWN ON PHOTO)

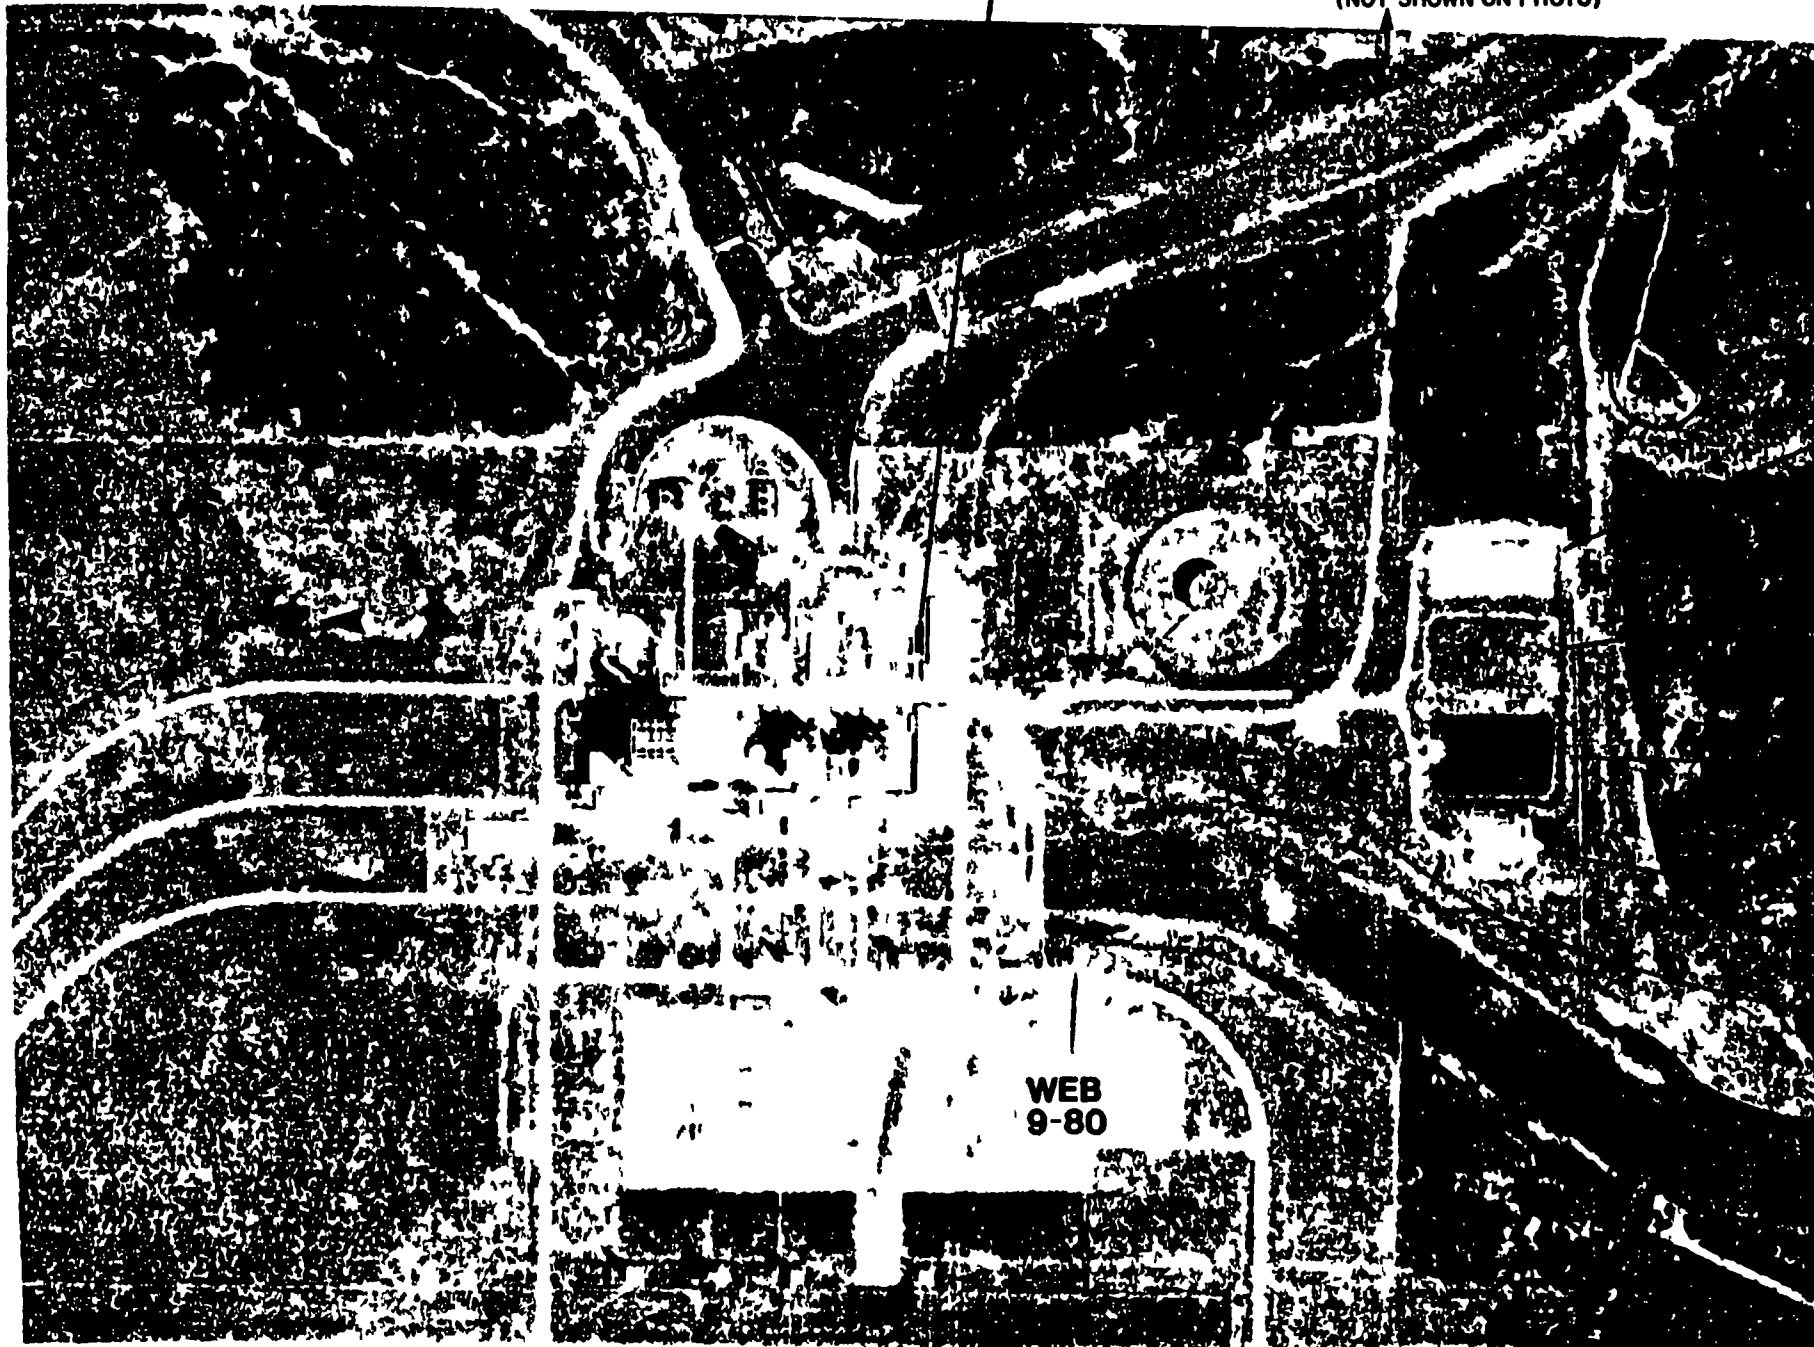

SOLID WASTE
DISPOSAL
SITE

METAL CLEAN-
ING ORGANIC
ACIDS
COLLECTION
POND
0.46 ACRE

DEMINERAL-
IZER
REGENERANT
COLLECTION
POND
0.65 ACRE

METAL CLEAN-
ING INORGAN-
IC ACIDS
COLLECTION
POND
0.71 ACRE

SAND DRYING
BEDS

CHEMICAL
WASTE
TREATMENT
SYSTEM


WEBSTER GENERATING STATION (607 762 ACRES)

1"-300"



METAL CLEANING
ORGANIC ACIDS
COLLECTION POND

DEMINERALIZER REGENERANT
COLLECTION POND

METAL CLEANING
INORGANIC ACIDS
COLLECTION POND

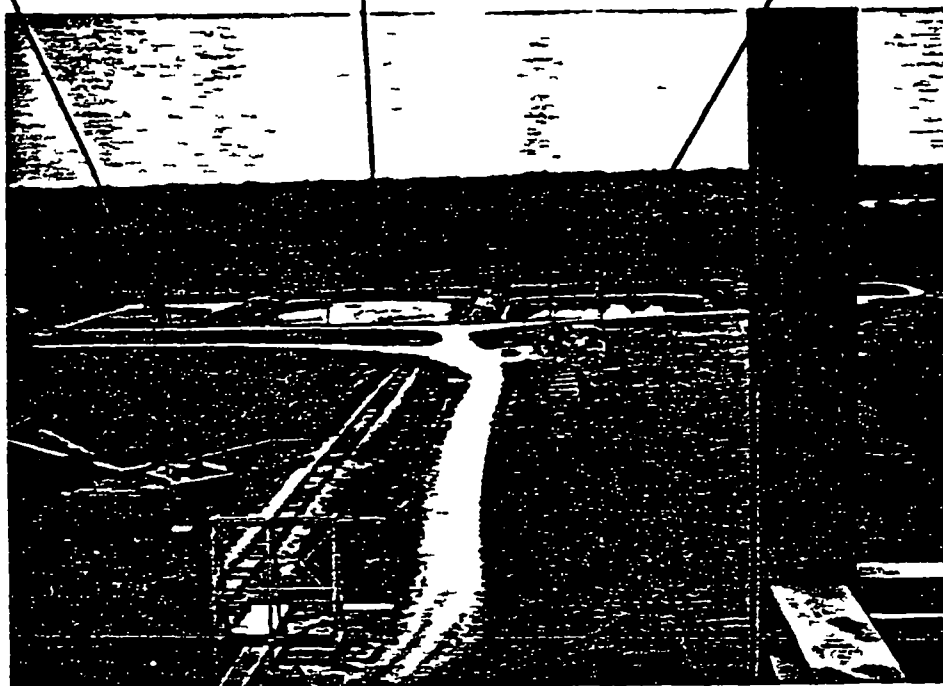

CHEMICAL WASTE
TREATMENT SYSTEM

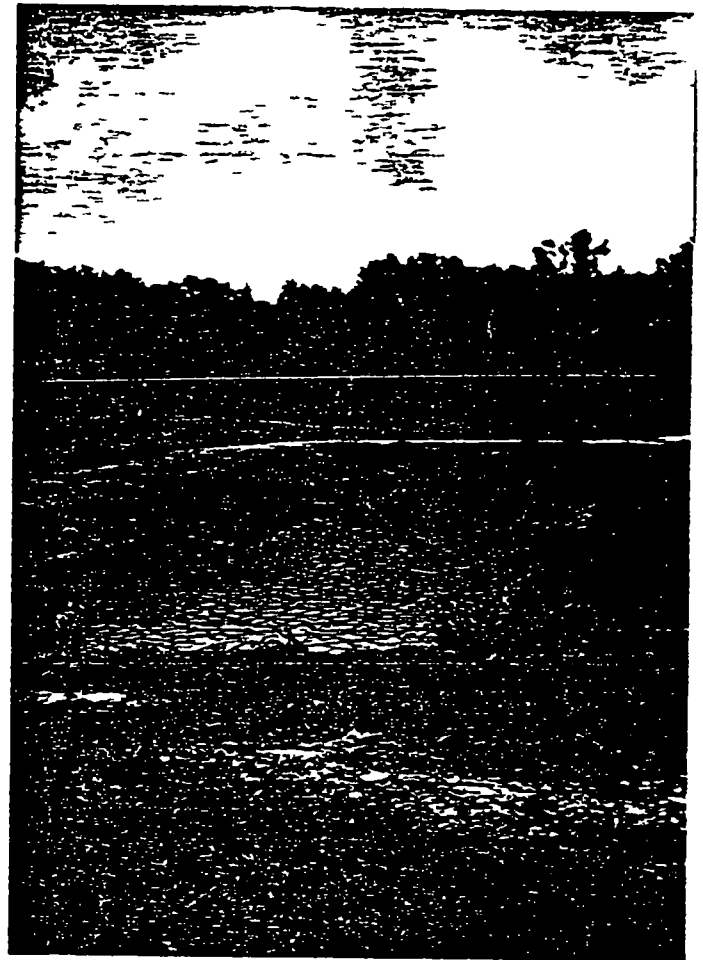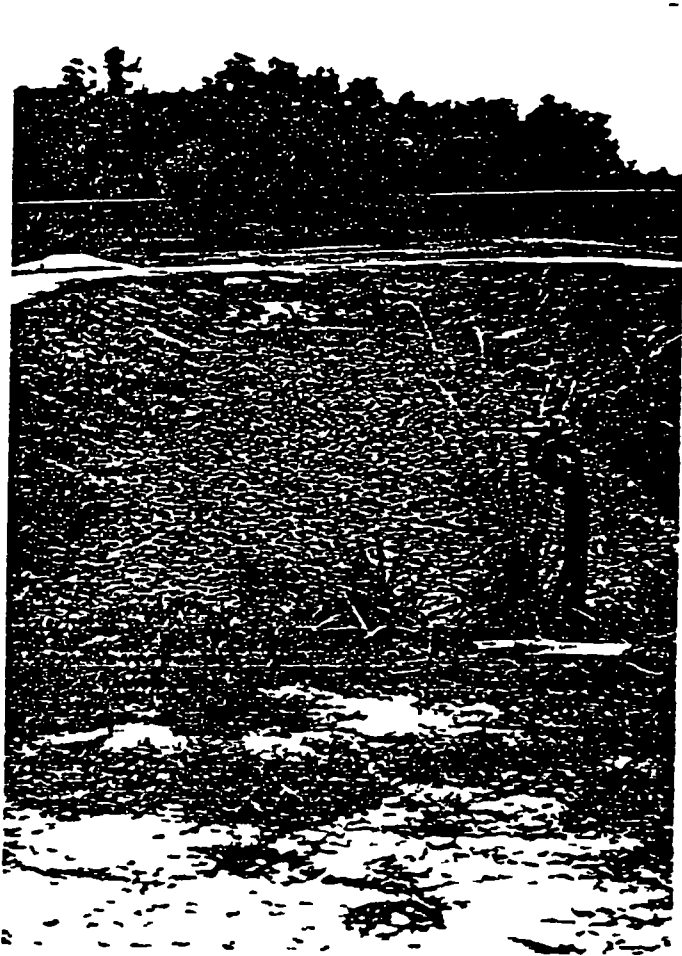


SAND DRYING BEDS

WEBSTER GENERATING STATION

1369

15

WASTE OIL & SLUDGE
COLLECTION FACILITY

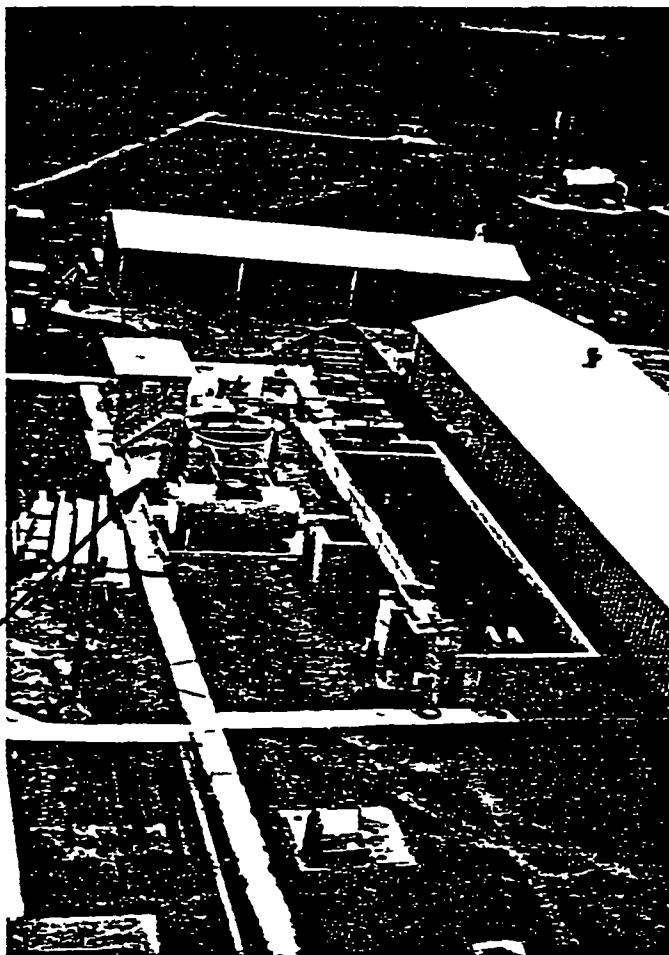

Reference

001 578 013034 Y89029387
552 87 4054-951 185

STANDA

57855 STANDARD AND POORS
CORPORATION
1989 V.1 STANDARD AND POORS
CORP REGISTER OF CORPORA

POOR  **Reference Use Only**

DALLAS PUBLIC LIBRARY
BUSINESS AND TECHNOLOGY

REGISTER of CORPORATIONS, DIRECTORS AND EXECUTIVES

Volume 1

1989 **Public Library**
MAR 10 1989

Dallas, Texas

Library of Congress Catalog Card Number 76 642986
ISSN 0361 3623

STANDARD & POOR'S CORPORATION
A McGraw-Hill Financial Services Company



25 Broadway, New York, N Y 10004
Telephone—212-208-8702



COPYRIGHT ©1989 STANDARD & POOR S CORPORATION ALL RIGHTS RESERVED

Accts—Deloitte Haskins & Sells Houston Texas
Primary Bank—Texas Commerce Bank Houston N.A.
Primary Law Firm—Bracewell & Patterson
Employees 1 900
Also DIRECTORS—Other Directors Are:
Frank A. Bennack Jr. Robert J. Danzig
Peter J. DeMaria Gilbert C. Maurer
BUSINESS: Publishing newspapers
S.I.C. 2711

HOUSTON DIE CASTING CO

(Subs. Chemillite Corp.)

3315 W 11th Street Houston, Texas 77008
Tel. 713-869-1434

Pres—Harold L. Gluckman
Exec V.P. (Product & Sales)—Joe Richard
Secy & Compt—Peggy Papageorgiou
Purch Agt—Keith Humber
Accts—P. Levin & Co. Houston, Texas
Primary Bank—Amerway Bank/Woodway N.A.
Primary Law Firm—Weycer Kaplan, Pulaski & Zuber
Sales: \$3Mil Employees: 45

Also DIRECTORS

PRODUCTS: Die castings & machining
S.I.C. 3599 3363 3364 3541

HOUSTON ELECTRIC CO201 Redmond Warner Robins, Ga. 31093
Tel. 913-922-8813

Pres—Charles G. McDonald
Gen Com—R. Joncal Leo
Project Mgr—William H. B. Ward
Accts—Walker Meadows & Childs, Warner Robins, Ga.
Primary Bank—First National Bank of Atlanta
Sales: \$1 30Mil Employees: 23
BUSINESS: Electrical
S.I.C. 5063, 5065

HOUSTON ELECTRONICS CORP

(Div. Dak Industries Inc.)

501 Pine St Ext., Kane, Pa. 16735
Tel. 814-837-9550

Pres—John M. Launtz
V.P.—Jack E. Launtz
Purch Agt—R. Iwanak
Sales Range: \$2—\$5Mil Employees: 150
PRODUCTS: Quartz crystal bases, glass to metal seals
S.I.C. 3679

HOUSTON ENGINEERS, INC.

(Subs. Wilson Industries, Inc.)

P.O. Box 567 Houston, Texas 77001
Tel. 713-927-3050

Pres—Dwight E. Besch, Jr.
V.P. (Eng)—Derrell D. Webb
V.P. (Mktg)—D. Hunter
V.P. (Admin & Support)—J. P. Doyle
Accts—Arthur Andersen & Co., Houston, Texas
Primary Bank—Texas Commerce Bank Houston, N.A.
Sales: \$12Mil Employees: 140

Also DIRECTORS—Other Directors Are:

Edwin A. Anderson James K. Andrews
W. J. Miller Preston Moore
Wallace S. Wilson
PRODUCTS: Oil well tools
S.I.C. 3533

H.W. HOUSTON CONSTRUCTION CO

210 S. Victoria, Pueblo, Colo. 81003

Tel. 719-544-2791

Pres & Treas—Albert Concialdi
V.P. & Secy—Kenneth W. West
V.P.—Robert Concialdi
Gen Com—Mickey W. Smith
Accts—C.L. Brown & Associates, Pueblo, Colo.
Primary Bank—Minnequa Bank of Pueblo
Primary Law Firm—Smith & Bilups
Sales: \$15Mil Employees: 100
BUSINESS: General contractor
S.I.C. 1542

HOUSTON INDUSTRIES INCORPORATED

P.O. Box 4567 Houston, Texas 77210

Tel. 713-629-3000

H Houston
Industries
Incorporated

Pres & Chief Exec Officer—D. D. Jordan
Exec V.P. & Chief Fin Officer—H. R. Dean
V.P. & Treas—W. A. Cropper
V.P. (Com Dev)—R. B. Dyer
V.P. Gen Com & Secy—H. R. Kelly
V.P. & Compt—D. M. McClanahan
Also DIRECTORS—Other Directors Are:
Charles E. Bishop John T. Cater
Floyd L. Culler Jr. Joseph M. Hendro
Howard W. Horne James R. Leach

Jon S. Lindsay
Randall Meyer
Jack T. Trotter
BUSINESS: Holding co. generation transmission distr. & sale of electric energy oil & gas, coal supply serv. cable TV development & marketing of lighting, purchase of accounts receivable of subsidiary & venture capital
S.I.C. 6719-1221 1311 4911 5063 6799

HOUSTON INSTRUMENT

(Div. Ametek Inc.)

8500 Cameron Rd., Austin, Texas 78753
Tel. 512-835-0900

Pres—Doyle K. Cavin
V.P. (Mktg)—John J. Carr Jr.
V.P. (Mfg)—Vern Glover
V.P. (Eng)—Eric Silverberg
V.P. (Admin)—Robert Zurack
Compt—Ted Middelberg
Accts—Arthur Young, Philadelphia, Pa.
Primary Bank—Chase Manhattan Bank, N.A.
Primary Law Firm—Stroock & Stroock & Luan
Employees: 400
PRODUCTS: Computer graphic peripheral devices, plotters, digitizers, scanners
S.I.C. 3577 3575, 3577

HOUSTON LIGHTING & POWER COMPANY

(Subs. Houston Industries Incorporated)

P.O. Box 1700, Houston, Texas 77251
Tel. 713-228-9211

The Light company
Houston Lighting & Power

*Chm & Chief Exec Officer—D. D. Jordan
*Pres & Chief Oper Officer—D. D. Sykora
Group V.P. (Nuclear)—J. H. Goldberg
Group V.P. (External Affairs)—R. J. Snookhouse
Group V.P. (Power Oper)—D. E. Simmons
Group V.P. (Admin & Support)—E. A. Turner
Sr V.P. Gen Com & Secy—H. R. Kelly
V.P. (Energy Prod)—D. G. Tice
V.P. (Human & Inf Resources)—R. E. Doan
V.P. (Sys Oper)—J. D. Greenwade
V.P. (Fossil Plt Eng & Const)—L. B. Hornigan, Jr.
V.P. (Regulatory Rel)—K. S. Letbetter
V.P. (Cost Rel)—A. D. Maddox
V.P. & Compt—J. S. Brian
V.P. (Fossil Fuel Resources)—L. G. Brackeen
V.P. (Nuclear Oper)—Gerald E. Vaughn
Treas—K. W. Nabors
Purch Agt—B. Commander Jr.
Accts—Deloitte Haskins & Sells, Houston, Texas
Primary Bank—Texas Commerce Bank, N.A.
Primary Law Firm—Baker & Botts
Revenue: \$3Bil Employees: 10 400
Also DIRECTORS—Other Directors Are:
Charles E. Bishop John T. Cater
Holts R. Dean Joseph M. Hendro
Howard W. Horne James R. Leach
Thomas B. McDade Kenneth L. Schmitzer Jr.
Jack T. Trotter
PRODUCTS: Generation, transmission, distr. & sale of electric energy
S.I.C. 4911

HOUSTON METALS CORP910-800 Pender St., Vancouver, B.C., Can. V6Q 2V6
Tel. 604-683-4245

*Pres & Secy—Adolf A. Potancic
Accts—Elliott Tulk Pryce & Anderson, Vancouver B.C., Can.
Primary Law Firm—Hemsworth & Schmidt
Assets: \$1.96Mil
Stock Exchange(s): VAN
Also DIRECTORS—Other Directors Are:
H. Ferris John Potancic
George Stewart
PRODUCTS: Oil & gas explor.
S.I.C. 1311

HOUSTON OIL & ENERGY INC.

422 Petroleum Bldg., Abilene Texas 79603

Pres—C. Houston
BUSINESS: Oil & gas explor.
S.I.C. 1311

HOUSTON OIL & MINERALS CORPORATION

(Subs. Seagull Energy Corp.)

1100 Louisiana St., Houston, Texas 77002
Tel. 713-757-2131

*Chm & Pres—Philip Oxley
*Exec V.P.—Stephen D. Cheabre
*Sr V.P.—G. W. Frank
*V.P.—G. E. Burgher Jr.
V.P.—John L. Elliott
V.P. & Asst Secy—C. B. Masters
*V.P.—E. J. Milan
V.P.—Vernon M. Turner
Treas—Gerald L. George
Secy—Karl A. Stew
Coat—T. S. Corbett

SUBSIDIARY**HOUSTON OIL INTERNATIONAL (SUBS.)**

Chm & Pres—Philip Oxley, Jr.

HOUSTON OIL & MINERALS COMPANY (SUBS.)

Chm & Pres—S. D. Cheabre

HOUSTON OIL & MINERALS COMPANY (SUBS.)

Chm—Joe B. Foster

HOUSTON OIL & MINERALS COMPANY (SUBS.)

Pres & Chief Exec Officer—

HOUSTON OIL & MINERALS DEVELOPMENTS

Chm & Pres—S. D. Cheabre

HOUSTON PRODUCTION

Chm & Pres—S. D. Cheabre

HOUSTON RURAL

Chm & Pres—S. D. Cheabre

HOUSTON RURAL

Accts—Arthur Andersen & Co.

HOUSTON RURAL

Primary Bank—

HOUSTON RURAL

Trust Co. of Chicago

HOUSTON RURAL

Total Income: \$134,711,000

HOUSTON RURAL

Also DIRECTORS

HOUSTON RURAL

J. D. Gooch

HOUSTON RURAL

BUSINESS: Oil & gas explor.

HOUSTON RURAL

S.I.C. 1311; 1312; 1313

HOUSTON RURAL

1901 Pender St.

HOUSTON RURAL

V.P. & Chief Exec Officer—

HOUSTON RURAL

Accts—Preston Moore

HOUSTON RURAL

Primary Bank—

HOUSTON RURAL

Primary Law Firm—

HOUSTON RURAL

Sales: \$6,600,000

HOUSTON RURAL

Stock Exchange(s): NYSE

HOUSTON RURAL

BUSINESS: Oil & gas explor.

HOUSTON RURAL

S.I.C. 1311; 1312

HOUSTON RURAL

1100 Louisiana St.

HOUSTON RURAL

Sr V.P. (Admin)—

HOUSTON RURAL

Accts—Preston Moore

HOUSTON RURAL

Primary Bank—

HOUSTON RURAL

Sales: \$31.56Mil

HOUSTON RURAL

Stock Exchange(s): NYSE

HOUSTON RURAL

BUSINESS: Oil & gas explor.

HOUSTON RURAL

S.I.C. 6799

HOUSTON RURAL

1200 Travis St.

HOUSTON RURAL

*Chm & Chief Exec Officer—

HOUSTON RURAL

Vice-Chm—

HOUSTON RURAL

Pres & Chief Oper Officer—

HOUSTON RURAL

*Exec V.P. & Chief Fin Officer—

HOUSTON RURAL

*Exec V.P. & Chief Oper Officer—

HOUSTON RURAL

Sr V.P. & Chief Admin Officer—

HOUSTON RURAL

Sr V.P.—R. G. Bennett

HOUSTON RURAL

Sr V.P.—J. R. Kinnaman

HOUSTON RURAL

V.P. & Treas—

HOUSTON RURAL

V.P. & Compt—D. G. Wray

HOUSTON RURAL

Secy—Peggy

HOUSTON RURAL

Accts—Deloitte Haskins & Sells

HOUSTON RURAL

Employees: 2 900

HOUSTON RURAL

Stock Exchange(s): NYSE

Also DIRECTORS

BUSINESS: Natural gas

S.I.C. 4922

HOUSTON RURAL

(Subs. Ferretco Inc.)

P.O. Box 4747 Houston

*Pres—J. D. Gooch

*Publisher—

V.P. & Chief Admin Officer—

V.P. (Prod)—

V.P. (Mktg)—

Editor in Chief—

Mgt. Editor—

Cir Dir—

Adv Dir—

Accts—

Primary Bank—

Primary Law Firm—

Employees: 1,200

Also DIRECTORS

BUSINESS: Newspaper

S.I.C. 2711

HOUSTON RURAL**HOUSTON TERMINAL COLD STORAGE**

701 N. San Jacinto St.

Tel. 713-4000

*Pres & Treas—

V.P.—

Secy—

Primary Bank—

Primary Law Firm—

Sales: Over \$2M

Also DIRECTORS

BUSINESS: Public

S.I.C. 4222; 4225


HOUSTON RURAL**HOUSTON WIRE**

9800 Market St.


A.M.S. Tel. 713-4000

*Chm & Pres—

V.P. (Sales)—

<p style="text-align: center;">RECORD OF COMMUNICATION</p> <p style="text-align: center;">Ref 15</p>	<div style="display: flex; justify-content: space-between; margin-bottom: 10px;"> <div style="text-align: center;"><input checked="" type="checkbox"/> XXX Phone Call</div> <div style="text-align: center;"><input type="checkbox"/> Discussion</div> <div style="text-align: center;"><input type="checkbox"/> Field Trip</div> </div> <div style="display: flex; justify-content: space-between;"> <div style="text-align: center;"><input type="checkbox"/> Conference</div> <div style="text-align: center;"><input type="checkbox"/> Other (Specify)</div> </div> <hr style="border: 0; border-top: 1px solid black; margin: 10px 0;"/> <p style="text-align: center;">(Record of Item Checked Above)</p>	
<p>TO Mr Sewers Houston Water Authority (713) 223-1095</p>	<p>FROM Pam Fetzner FIT ICF ICF Technology (214) 744-1641</p>	<p>DATE 3-14 89</p> <hr style="border: 0; border-top: 1px solid black; margin: 5px 0;"/> <p>TIME 0830 hours</p>
<p>SUBJECT Intake Locations for Lake Houston</p> <hr style="border: 0; border-top: 1px solid black; margin: 10px 0;"/> <p>SUMMARY OF COMMUNICATION</p> <p>The intakes are located on the dam (south end of lake on East Federal Road)</p> <p>They also pump water from the Trinity River south of Liberty TX They are building a treatment plant north of Ellington Field to treat the water pumped from the Lynchburg Canal</p> <p>They service Nassau Bay League City Webster and Clear Lake City among others for surface water No water is obtained for drinking from Clear Lake</p> <div style="text-align: right; margin-top: 20px;">  </div>		
<p>CONCLUSIONS ACTION TAKEN OR REQUIRED</p>		
<p>INFORMATION COPIES TO</p> <hr style="border: 0; border-top: 1px solid black; margin: 10px 0;"/> <p>EPA Form 1300 6 (7 72) Replaces EPA HQ Form 5300 3 Which May Be Used Until Supply Is Exhausted</p>		

<p style="text-align: center;">RECORD OF COMMUNICATION</p> <p style="text-align: center;">Ref 16</p>	<div style="display: flex; justify-content: space-between;"> <div style="text-align: center;"> <input checked="" type="checkbox"/> Phone Call <input type="checkbox"/> Conference </div> <div style="text-align: center;"> <input type="checkbox"/> Discussion <input type="checkbox"/> Other (Specify) </div> <div style="text-align: center;"> <input type="checkbox"/> Field Trip </div> </div> <hr style="border: 0; border-top: 1px solid black; margin: 5px 0;"/> <p style="text-align: center;">(Record of Item Checked Above)</p>													
<p>TO Will Moberly Clear Lake City Water Authority</p>	<p>FROM Pam Fetzner FIT ICF ICF Technology (214) 744 1641</p>	<p>DATE 3-13 89</p> <hr style="border: 0; border-top: 1px solid black; margin: 5px 0;"/> <p>TIME 1530 hours</p>												
<p>SUBJECT Public Water Source for Clear Lake City</p> <hr style="border: 0; border-top: 1px solid black; margin: 5px 0;"/> <p>SUMMARY OF COMMUNICATION</p> <p>Mr Moberly said that they purchase the majority of their water from Houston (Lake Houston) They service 42 000 people with 90% surface water and 10% ground water They have 6 wells that are screened in the Lower Chicot Aquifer The well locations are as follows</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">1) 17507 El Camino Real</td> <td style="width: 50%;">south end of town</td> </tr> <tr> <td>2) 600 Eldorado</td> <td>east end of town off Hwy 3</td> </tr> <tr> <td>3) 4231 Manor</td> <td>Clear Lake forest</td> </tr> <tr> <td>4) 1600 Diane (golf course)</td> <td>Taylor Lake south of town</td> </tr> <tr> <td>5) 900 Barry Blvd</td> <td>south of #2 off of Hwy 3</td> </tr> <tr> <td>6) 1700 Racida (golf course)</td> <td>east of #4 (irrigation)</td> </tr> </table> <p>The wells are screened at 200 to 250 feet The static water level is \pm 190 feet</p> <div style="text-align: right; margin-top: 10px;"> <i>Pam Fetzner</i> </div>			1) 17507 El Camino Real	south end of town	2) 600 Eldorado	east end of town off Hwy 3	3) 4231 Manor	Clear Lake forest	4) 1600 Diane (golf course)	Taylor Lake south of town	5) 900 Barry Blvd	south of #2 off of Hwy 3	6) 1700 Racida (golf course)	east of #4 (irrigation)
1) 17507 El Camino Real	south end of town													
2) 600 Eldorado	east end of town off Hwy 3													
3) 4231 Manor	Clear Lake forest													
4) 1600 Diane (golf course)	Taylor Lake south of town													
5) 900 Barry Blvd	south of #2 off of Hwy 3													
6) 1700 Racida (golf course)	east of #4 (irrigation)													
<p>CONCLUSIONS ACTION TAKEN OR REQUIRED</p>														
<p>INFORMATION COPIES TO</p> <hr style="border: 0; border-top: 1px solid black; margin: 5px 0;"/> <p>EPA Form 1300-6 (7 72) Replaces EPA HQ Form 5300 3 Which May Be Used Until Supply Is Exhausted</p>														

<p style="text-align: center;">RECORD OF COMMUNICATION</p> <p style="text-align: center;">Ref 17</p>	<div style="display: flex; justify-content: space-between; align-items: flex-start;"> <div style="width: 30%;"> <input checked="checked" type="checkbox"/> Phone Call <input type="checkbox"/> Conference </div> <div style="width: 30%;"> <input type="checkbox"/> Discussion <input type="checkbox"/> Other (Specify) </div> <div style="width: 30%;"> <input type="checkbox"/> Field Trip </div> </div> <hr style="border: 0; border-top: 1px solid black; margin: 10px 0;"/> <p style="text-align: center;">(Record of Item Checked Above)</p>	
<p>TO Mr Ernest Baker U S G S Hydrologist (512) 832-5791</p>	<p>FROM Pam Fetzer FIT ICF ICF Technology (214) 744 1641</p>	<p>DATE 3 14-89</p> <hr style="border: 0; border-top: 1px solid black; margin: 5px 0;"/> <p>TIME 1030 hours</p>
<p style="text-align: center;">SUBJECT Hydrogeology of the Southeast Houston Area</p> <hr style="border: 0; border-top: 1px solid black; margin: 5px 0;"/> <p>SUMMARY OF COMMUNICATION</p> <p>Mr Baker stated that the wells for Webster were screened in the Lower Chicot Aquifer, more specifically the Alta Loma Sand member. The member is 120 feet thick and is stratigraphically between the Upper Chicot and the Evangeline Formations. The base of the Lower Chicot is approximately 665 feet below sea level.</p> <p>The Upper and Lower Chicot are interconnected but the Upper Chicot is a much tighter formation consisting of a higher ratio of clay to sand.</p> <p>The Evangeline aquifer is not used as frequently as a drinking water source in the SE Houston area as the encroachment of salt water is likely and the Alta Loma Sand, being a shallower water bearing unit, is a prolific producer.</p> <p>The Webster City well is 622 feet deep and is screened at 528 to 610 feet. The static water level in 1955 was 137 feet but in 1971 it was 207 feet.</p>		
<p>CONTINUATION OF SUMMARY OF COMMUNICATION The Webster Power Plant Well is 664 feet deep, screened between 500 to 645 feet. The static water level in 1951 was 90 feet and in 1971 was 200 feet.</p> <div style="text-align: right; margin-top: 100px;">  </div>		
<p>INFORMATION COPIES TO</p> <hr style="border: 0; border-top: 1px solid black; margin: 10px 0;"/> <p>EPA Form 1300-6 (7-72) Replaces EPA HQ Form 5300 3 Which May Be Used Until Supply Is Exhausted</p>		

RECORD OF
COMMUNICATION

Reference 18

☒
☐

Phone Call
Conference

☐
☐

Discussion
Other (Specify)

☐

Field Trip

(Record of Item Checked Above)

TO Joe Castleberry
Texas Public Utilities
Commission

FROM Pam Fetzner
FIT - ICF
ICF Technology
(214) 744-1641

DATE 3-7-89

TIME 1100 hours

SUBJECT Financial History of the Webster Generating Plant

SUMMARY OF COMMUNICATION

He said that three units operated at this plant The first turbine came on line in 1954 and the last in 1965 The last is the only unit currently operating He did not know the net worth of this plant because the company values each unit separately and publishes the total cost of each type of unit They do not generate separate reports for each plant The original cost of the steam turbines is \$25 933,178 00 and the gas turbine is \$1,383 431 00

Pam Fetzner

CONCLUSIONS, ACTION TAKEN OR REQUIRED

INFORMATION COPIES
TO

EPA Form 1300 6 (7-72)
Replaces EPQ HQ Form 5300 3 Which May Be Used Until Supply Is Exhausted

RECORD OF
COMMUNICATION

Reference 19

☒ Phone Call ☐ Discussion ☐ Field Trip
☐ Conference ☐ Other (Specify)

(Record of Item Checked Above)

TO Dan Bulla
Shareholder Relations
Houston Industries
(713) 629-3060

FROM Pam Fetzer
FIT ICF
ICF Technology
(214) 744-1641

DATE 3 7-89

TIME 1040 hours

SUBJECT Value of the Webster Generating Plant

SUMMARY OF COMMUNICATION

He said that Houston Lighting and Power has a book asset value of \$10 billion The net value is not known as it depends on what bank you ask

The Webster Generating Plant is fully depreciated He suggested that I speak with the Texas Public Utilities Commission

Pam Fetzer

CONCLUSIONS ACTION TAKEN OR REQUIRED

INFORMATION COPIES
TO

EPA Form 1300-6 (7-72)
Replaces EPQ HQ Form 5300-3 Which May Be Used Until Supply Is Exhausted

RECORD OF
COMMUNICATION

Reference 20

☒
☐

Phone Call

Conference

☐
☐

Discussion

Other (Specify)

☐

Field Trip

(Record of Item Checked Above)

TO Janet Greenwood
Galveston City Dept
of Health - Supervisor
(713) 534-2531

FROM Pam Fetzner
FIT - ICF
ICF Technology
(214) 744 1641

DATE 3 14 89

TIME 1110 hours

SUBJECT Private Ground Water Wells

SUMMARY OF COMMUNICATION

She said that in Galveston County, privately owned wells are in use
A rough estimate of the Southeast Houston area for people that pump
ground water from their own wells is about 8 360 people

Pam Fetzner

CONCLUSIONS ACTION TAKEN OR REQUIRED

INFORMATION COPIES
TO

EPA Form 1300-6 (7 72)
Replaces EPQ HQ Form 5300 3 Which May Be Used Until Supply Is Exhausted

**TEXAS
WATER
DEVELOPMENT
BOARD**




Report 178

**GROUND-WATER DATA FOR
HARRIS COUNTY, TEXAS
VOLUME II
RECORDS OF WELLS, 1892-1972**

January 1974

No	Owner	Drill	Date completed	Depth of well (ft)	Casing		Well bottom unit	Altitude of land (ft)	Water level		Date of measurement	Method of lift	Use of well	Remarks
					Depth (ft)	Thickness (ft)			Abandonment	Lowland				
65 32 611	Se book Ship d	M M t d Poweroy	1939	523	6	523	C	7	50		1939	T E	I d	R p o t d y i l d 150 gpm with 40 ft d w d w h d i l l d
612	Irm Ch i ty	W l l i B u r	1913	521	4	521	C	12	49 4	J	7 1940	N	N	W l l d t o y d
613	H i Cou ty WC d ID N 50 El Lago	L y T Co	1965	590	10 6	530 590	CL	16	167	J	3 1965	T E 20	P	S f o m 537 t 577 ft 2/
615	J A Wilki	M R Petty	1938	527	4	527	CL	11	48	J	17 1938	N	N	S f 505 t 527 ft w l l d t y d 2/
616	Joh Ch pm	W l l i B r n	1920	660	2	660	C	10				N	N	W l l d t y d
621	H i Cou ty WC d ID N 55 S b ok	Lay T C	1967	665	14 8	530 665	CL	19	191 218	J M	20 1967 4 1971	T E 100	P	S f o m 540 t 650 ft R p t d y i l d 1 254 gp with 38 ft d d w h d i l l d 1/ 2/
624	Har i Cou ty WC d ID No 50 El Lag W l l 3	d	1969	655	20 14	530 655	CL	16	213	J	3 1969	T E	P	Sc f 540 to 640 ft R p t d y i l d 1 153 gpm with 41 ft d w h d i l l d T t h l d i l l d t 664 ft 2/
701	City of W bet W l l 1	d	1955	622	10 5	622	CL	24	137 207	A g M	4 1955 4 1971	T E 25	P	S f 528 to 610 ft T t h l d i l l d t 693 ft 1/ 2/
702	Housto Lighti g a d Pow r Co W b t e Pl t W l l 1	d	1952	636	16 10	475 636	CL	18	112	Ap	10 1952	T E 200	I d	128 ft f sc betw 480 d 618 ft Rep t d y i l d 1 791 gp ith 98 ft d d w h d i l l d
703	H usto Lighti g d Powe C W b t Pl t Well 2	d	1951	664	24 20 10	484 492 664	CL	19	90 200	Sept F b	11 1951 11 1971	S b E	I d	125 ft of bet n 500 a d 645 ft R p t d y i l d 1 440 gpm ith 76 ft d w d h d i l l d 1/
705	S Si b	L y Bo l Co	1908	659	24 10	659	CL	24	29 5 99 7	Ap F b	3 1931 12 1952	N	N	Sc f 547 to 659 ft F ly d t o y d 2/ 3/
706	G R Wit mb	Ab d Altemus	Old	563	2	563	C	26	34 9	Oct	7 1932	N	N	W l l d t y d
707	W b t S hool	W l l i B u	1927	500	3	500	C	25				N	N	W l l d t y d
710	G l to Hou t El t i Co	L y Bowl Co	1910	788	6	788	CL	5				N	N	61 ft f bet 568 d 653 ft W l l d t y d 2/
711	Humble Pipe Li C W l l 2	L y Te s Co	1938	660	8 6	592 660	CL	9	42 181 0	J Feb	11 1938 17 1971	S b E	I d	S e f m 592 to 659 ft S ppli pump st tio 1/
738	F t Pa k Ea t C m t y	d	1955	637	10 6	637	CL	22	112	M	2 1955	T E 30	I	S f 560 t 620 ft
739	City of W bet W l l 2	d	1967	645	14 8	515 645	CL	24	186 201 6	J ly M	20 1967 4 1971	T E	P	S f m 525 t 635 ft R p o t d y i l d 510 gpm with 23 ft d awd h d i l l d T t h l d i l l d t 670 ft 1/ 2/
740	A A Polk	L Wil	1932	130	4	130	CU	27				C E	D	S f o m 103 to 125 ft

See foot t t d f t b l

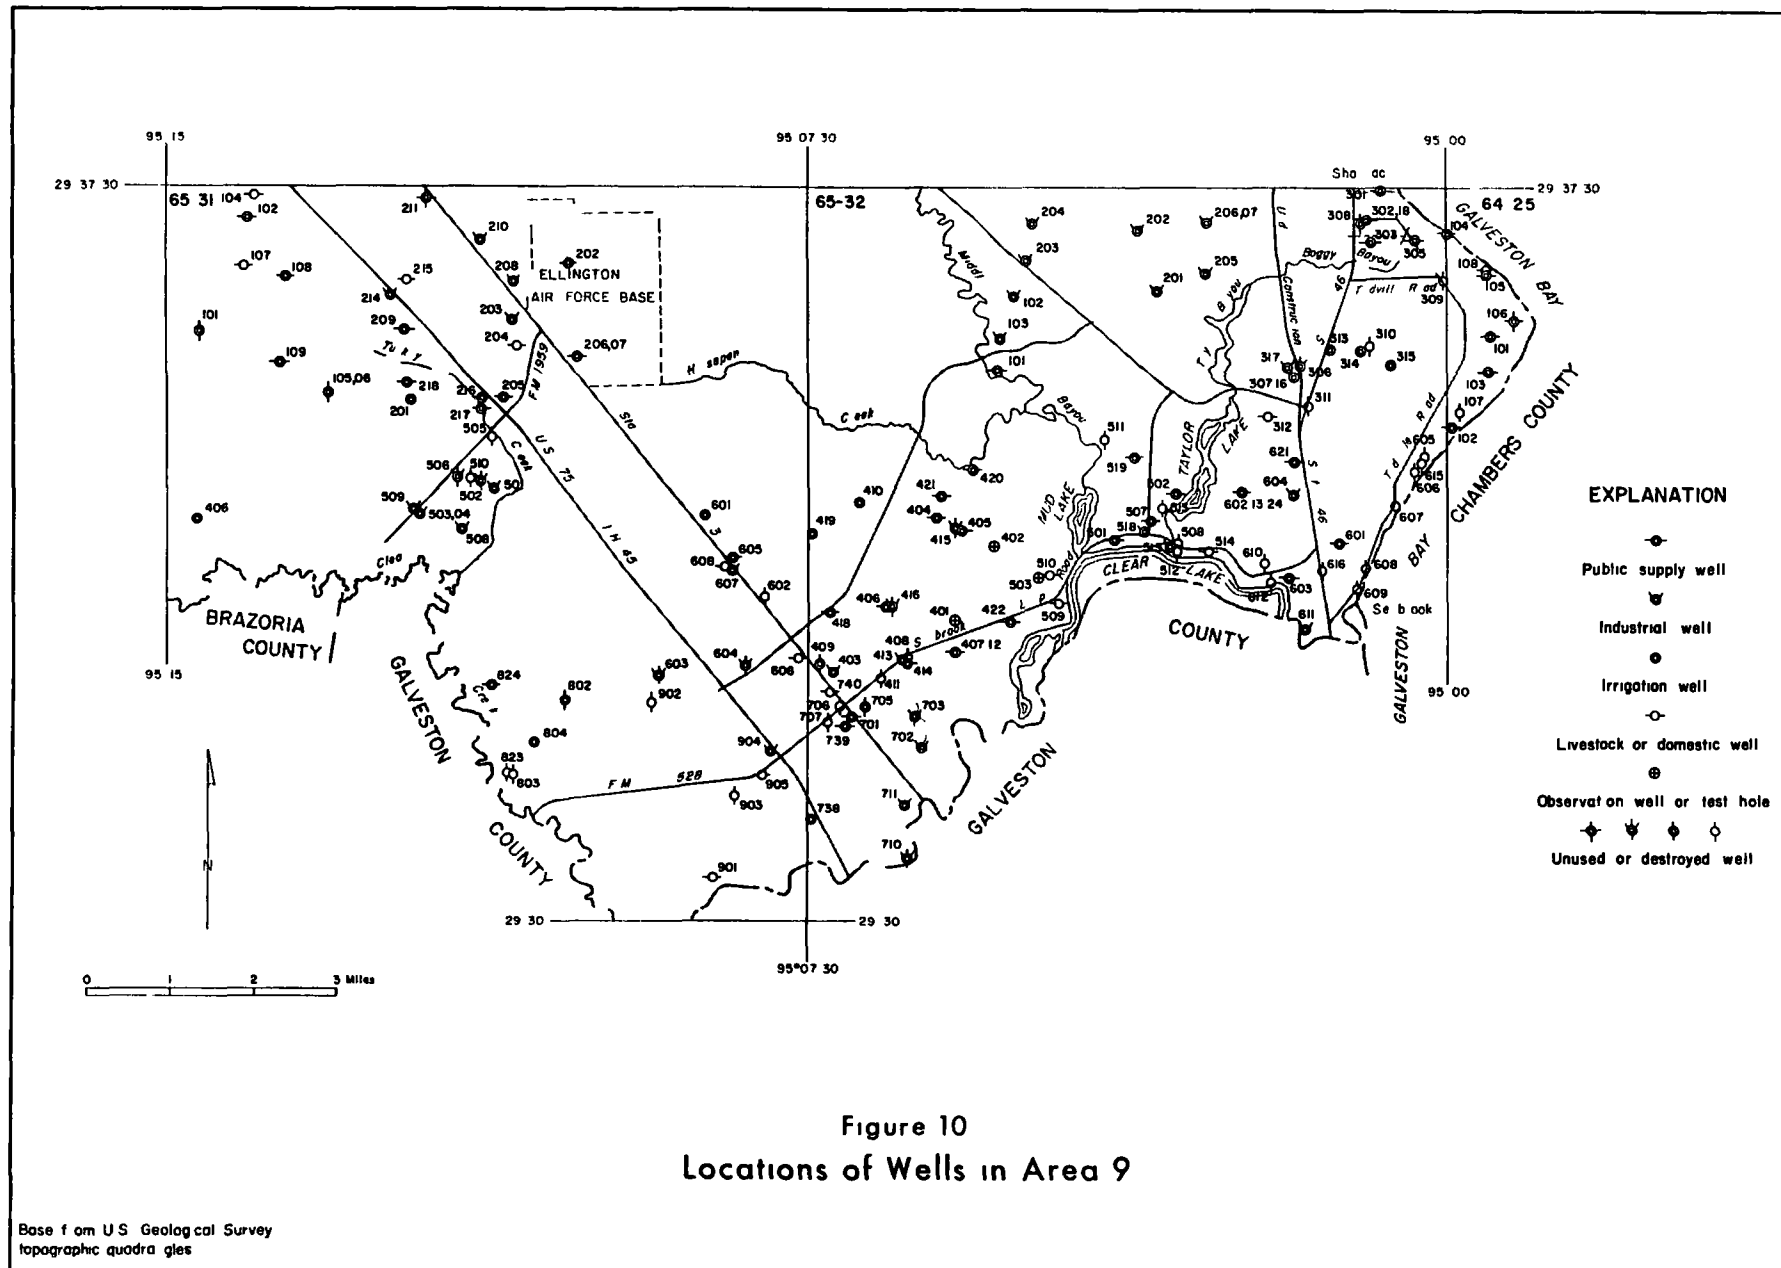

<p>RECORD OF COMMUNICATION</p> <p>Ref 22</p>	<div style="display: flex; justify-content: space-between; align-items: flex-start;"> <div style="text-align: center;"> <input checked="" type="checkbox"/> XXX Phone Call <input type="checkbox"/> Conference </div> <div style="text-align: center;"> <input type="checkbox"/> Discussion <input type="checkbox"/> Other (Specify) </div> <div style="text-align: center;"> <input type="checkbox"/> Field Trip </div> </div> <hr style="border: 0; border-top: 1px solid black; margin: 10px 0;"/> <p style="text-align: center;">(Record of Item Checked Above)</p>	
<p>TO Henry Fleming Corps of Engineers (409) 766-3070</p>	<p>FROM Pam Fetzner FIT ICF ICF Technology (214) 744-1641</p>	<p>DATE 3 14 89</p> <hr style="border: 0; border-top: 1px solid black; margin: 5px 0;"/> <p>TIME 1120 hours</p>
<p>SUBJECT Surface Water use in the S E Houston Area</p> <hr style="border: 0; border-top: 1px solid black; margin: 10px 0;"/> <p>SUMMARY OF COMMUNICATION</p> <p>Clear Lake and Clear Creek are used for recreation but not as a drinking water supply Galveston Bay is used for commercial fishing and contact recreation No intakes are on Clear Lake or Clear Creek because there are tidal surges up to I 45</p> <div style="text-align: right; margin-top: 100px;"> <i>Pam Fetzner</i> </div>		
<p>CONCLUSIONS ACTION TAKEN OR REQUIRED</p>		
<p>INFORMATION COPIES TO</p> <hr style="border: 0; border-top: 1px solid black; margin: 10px 0;"/> <p>EPA Form 1300-6 (7-72) Replaces EPA HQ Form 5300-3 Which May Be Used Until Supply Is Exhausted</p>		

Use print or type in the unshaded areas only

TX0006432

FORM
2C
NPDES

U.S. ENVIRONMENTAL PROTECTION AGENCY
APPLICATION FOR PERMIT TO DISCHARGE WASTEWATER
EXISTING MANUFACTURING COMMERCIAL MINING AND SILVICULTURAL OPERATIONS
Consolidated Permits Program

I OUTFALL LOCATION

For each outfall list the latitude and longitude of its location to the nearest 15 seconds and the name of the receiving water

A OUTFALL NUMBER (list)	B LATITUDE			C LONGITUDE			D RECEIVING WATER (name)
	DEG	M N	EC	DEG	M N	EC	
001	95	03	15	29	33	00	Clear Lake in Segment 2425
002	95	04	30	29	33	30	of the Texas bay waters
003	95	06	15	29	31	45	
004	95	06	15	29	31	45	

II FLOWS SOURCES OF POLLUTION AND TREATMENT TECHNOLOGIES

A Attach a line drawing showing the water flow through the facility. Indicate sources of intake water, operations contributing wastewater to the effluent and treatment units labeled to correspond to the more detailed descriptions in Item B. Construct a water balance on the line drawing by showing average flows between intakes, operations, treatment units and outfalls. If a water balance cannot be determined (e.g. for certain mining activities) provide a pictorial description of the nature and amount of any sources of water and any collection or treatment measures.

B For each outfall provide a description of (1) All operations contributing wastewater to the effluent including process wastewater, sanitary wastewater, cooling water and storm water runoff; (2) The average flow contributed by each operation; and (3) The treatment received by the wastewater. Continue on additional sheets if necessary.

1 OUTFALL NO (list)	2 OPERATION(S) CONTRIBUTING FLOW		3 TREATMENT		
	A OPERATION (list)	B AVERAGE FLOW (include units)	C DESCRIPTION	D LIST CODES FROM TABLE 2C.1	
001	NONCONTACT ONCE-THROUGH	209 111 MGD			
	COOLING WATER AND PREVIOUSLY				
	MONITORED EFFLUENTS				
	(2/3 FLOW)				
002	NONCONTACT ONCE-THROUGH	104 222 MGD			
	COOLING WATER AND PREVIOUSLY				
	MONITORED EFFLUENTS				
	(1/3) FLOW)				
003	LOW VOLUME WASTEWATER	0 047 MGD	COAGULATION, FLOCCULATION	2-D	1-G
	floor drainage		SEDIMENTATION, SKIMMING	1-U	XX
			AIR FLOTATION	1-H	
004	LOW VOLUME WASTEWATER	0 069 MGD	COAGULATION, SEDIMENTATION	2-D	1-U
	demineralizer regenerant		NEUTRALIZATION	2-K	
	boiler blowdown				
104	METAL CLEANING WASTEWATER	0*	CHEMICAL PRECIPITATION	2-C	
			COAGULATION, SEDIMENTATION	2-D	
			NEUTRALIZATION	2-K	
	*infrequent discharge				
NOTE: Sludge produced by all systems is disposed of offsite					
by a licensed contractor					

OFFICIAL USE ONLY (effluent guidelines sub categories)

RECEIVED

APR 14 1987

6vv-rs

1X0006432

V INTAKE AND EFFLUENT CHARACTERISTICS

A B & C See instructions before proceeding — Complete one set of tables for each outfall — Annotate the outfall number in the space provided
NOTE Tables V A V B and V C are included on separate sheets numbered V 1 through V 9

D Use the space below to list any of the pollutants listed in Table 2c 3 of the instructions which you know or have reason to believe is discharged or may be discharged from any outfall For every pollutant you list briefly describe the reasons you believe it to be present and report any analytical data in your possession

1 POLLUTANT	2 SOURCE	1 POLLUTANT	2 SOURCE
Aluminum Sulfate	- Wastewater Treatment	Sulfuric Acid	- Wastewater Treatment - Demineralizer Process - Water Conditioning
Ammonia	- Water Conditioning		
Chlorine	- Water Conditioning - Disinfection	Various trace	- Proprietary Polymers - Laboratory Reagents
Sodium Nitrite	- Water Conditioning		
Sodium Phosphates (di and tri)	- Water Conditioning - Cleaning Solutions		
Sodium Hydroxide	- Wastewater Treatment - Demineralizer Process		

VI POTENTIAL DISCHARGES NOT COVERED BY ANALYSIS

Is any pollutant listed in Item V C a substance or a component of a substance which you currently use or manufacture as an intermediate or final product or byproduct?

☐ YES (list all such pollutants below)☒ NO (go to Item VI B)

RECORD OF COMMUNICATION Reference 24	<table> <tr> <td><input checked="" type="checkbox"/></td> <td>Phone Call</td> <td><input type="checkbox"/></td> <td>Discussion</td> <td><input type="checkbox"/></td> <td>Field Trip</td> </tr> <tr> <td><input type="checkbox"/></td> <td>Conference</td> <td><input type="checkbox"/></td> <td colspan="3">Other (specify)</td> </tr> </table>	<input checked="" type="checkbox"/>	Phone Call	<input type="checkbox"/>	Discussion	<input type="checkbox"/>	Field Trip	<input type="checkbox"/>	Conference	<input type="checkbox"/>	Other (specify)		
<input checked="" type="checkbox"/>	Phone Call	<input type="checkbox"/>	Discussion	<input type="checkbox"/>	Field Trip								
<input type="checkbox"/>	Conference	<input type="checkbox"/>	Other (specify)										
(Record Of Item Checked Above)													
TO Gene Keepper U S EPA Biologist (214) 655-2263		FROM Pam Fetzer FIT - ICF (214) 744-1641		DATE 3-23-89 TIME 1523 hours									
SUBJECT Wetlands in the Southeast Houston Area													
SUMMARY OF COMMUNICATION Gene said that the area around the Houston Lighting and Power Plant (Webster) is a coastal wetland The impoundments are located in this wetland The wetlands are located in the area of Clear Lake Clear Creek and into Galveston Bay													
CONCLUSIONS, ACTION TAKEN OR REQUIRED													
INFORMATION COPIES TO													
EPA Form 1300 6 (7 72) Replaces EPA HQ Form 5300-3 Which May Be Used Until Supply Is Exhausted													

CME

1400 Kirby Bldg Suite 900 Dallas, TX 75201
REFERENCE 25
Street

TEXAS WATER COMMISSION
Comprehensive GW Monitoring Evaluation (CME) Report

TWC Ref to 31633

INSPECTION COVER SHEET

EPA ID No. TXD0008377369

SEP 10 1987
C.O Use Only
C 98 7 AM
Date Entry Date

NAME OF COMPANY Houston Lighting and Power - Webster
SITE ADDRESS P.O. Box 1700, Houston, TX Tel 713 922-2186
COUNTY Harris TYPE OF INDUSTRY Electric Power Generation

Current GW Monitoring Status HL&P is no longer sampling
(Specify for each Waste Management Area "WMA") Wells

Inspection Information

Inspector(s) Robert Hahn Date(s) 4-24-87
Participants _____

Type of Inspection (check) EV ☐ CME ☒ SA ☒

Evaluation	S	U
A. Monitoring System	<input type="checkbox"/>	<input type="checkbox"/>
B. Sampling Procedures	<input type="checkbox"/>	<input type="checkbox"/>
C. Analysis & Results	<input type="checkbox"/>	<input checked="" type="checkbox"/>
D. Records & Response	<input type="checkbox"/>	<input type="checkbox"/>

Signed: Robert W Hahn
Inspector
Date: 5-27-87
Signed: Marilyn Ginn
Reviewer
Date: 9-15-87
PSL 9/16/87

S= Satisfactory U= Unsatisfactory

Overall Evaluation: Compliant ☒ NonCompliant ☐

TEXAS WATER COMMISSION
Comprehensive GW Monitoring Evaluation (CME) ReportCONTENTS SHEETFACILITY NAME Houston Lighting and Power

- X 1. Code Sheet (0814)
- X 2. Interoffice Memorandum (IOM)
- X 3. Inspection Cover Sheet
- X 4. Technical Report, with supporting Attachments
- ___ A. Monitoring System
- ___ B. Sampling Procedures
- X C. Analysis and Results
- ___ D. Records and Response
- ___ 5. EV Inspection Checklist (if joint inspection with District Office)
- ___ 6. Notice of Violation (NOV) / Enforcement Letter to Facility
- ___ 7. Other (describe) _____
- _____
- _____

* If a required Checklist is omitted, explain _____

C Analysis and Results

- 1 Tabulation of Analytical Methods - Attachment P
Indicate directly on Attachment which analyses are performed by
 - a Off-site contract laboratory (*)
 - b On-site operator laboratory (**)
 - c Field measurement (***)
- 2 Are all samples analyzed with an EPA-approved method (yes/no)? YES
If not, indicate on Attachment (above) which methods are not EPA-approved.
3. Analytical Methods
 - a Has the operator consistently utilized the same analytical methodology during the monitoring program (yes/no)? YES
 - b. Has the operator changed analytical laboratories during the monitoring program (yes/no)? Yes, however HL&P has retained APR as the contract lab for the past 3 years
 - c. Describe any inconsistencies and how the operator has tried to resolve them None, see comments below (Section C 5 c) for peculiarities in the May 31, 1987 laboratory data
4. What is the sample analysis turn-around time (i e , the time required to receive results from the laboratory)? 1 month
- 5 Laboratory Quality Assurance/Quality Control (QA/QC)
 - a. Describe the laboratory's QA/QC program.

The laboratory QA/QC program is uncertain The necessary information such as results of laboratory blanks, spikes and replicates was not included.
 - b. Example of analytical results and/or QA/QC results as reported by the laboratory to the operator - Attachment Q
 - c Do the results of the QA/QC program verify the validity and reliability of the laboratory and field-generated data (yes/no)?

No QA/QC results were included with the laboratory results, therefore, the reliability of the data is questionable
6. Review the operator's records of analytical results for
 - a Parameters of initial year of sampling which exceed IPDWS,
Attachment R

Texas Water Commission

INTEROFFICE MEMORANDUM

TO The Files DATE 9-4-87

THRU Mr Russel Kimble, Reports and Management Group
Hazardous and Solid Waste Division

FROM *RWH* Robert Hahn, RCRA Ground-water Enforcement Unit
Hazardous and Solid Waste Division

SUBJECT Houston Lighting and Power- Webster Generating Station

Attached is an addendum report to the Comprehensive Monitoring Evaluation (CME) of Houston Lighting and Power which includes results of analysis of monitor well samples taken during the inspection. These results were not available at the time of the CME report submittal. The attachment to this memo should be affixed to the original CME report.

Summary

On April 24, 1987, a Comprehensive Monitoring Evaluation was conducted at the HL&P Webster Generating Station, Harris County, Texas.

RWH

Discrepancies that exist in the HL&P analytical program include

- 1 Results of spikes, duplicates or blanks are not reported
- 2 Cation- anion data for samples collected from MW-1 appears to be erroneous and dissimilar to split sample results analyzed by the Texas Department of Health

Houston Lighting and Power will be requested to explain the discrepancies in their data.

- 3 An explanation has been provided above noting the discrepancy between the TWC and HLP data. The error appears to lie only with the sample for MW-1. The HL&P report indicated that the bicarbonate analysis was performed on a sample that was acidified and filtered in the field. As indicated in Section II B of this CME, no samples were filtered in the field. Even though analyzing for bicarbonate from an acidified sample is considered incorrect in procedure, it is also peculiar that a high value for bicarbonate would be found on an acidified sample regardless of the acid that was used. It is possible that the other cations were analyzed from a field acidified sample because their values appear much higher with respect to the TWC samples, but this would not account for an error of less than 1 %.

- d Compare data sets to historical results - note here any parameters which do not occur within previously observed ranges

A summary of the historical results is provided in Attachment W

Historically, there exists some variability in the range of concentrations for conductivity, especially in monitor well 1. As shown in section 9 below, the quality of water at MW-1 is highly influenced by the quality of water from the discharge canal located approximately 100 feet to the north.

TOC values in all wells appear highest in 1982 during the first year of sampling which could correlate with a change in laboratories in 1983.

As shown in Attachment S, apparent small increases in concentrations of cation-anion data can be observed in the 4-24-87 samples relative to the 1984 Assessment Report data. These increases could be due to differences in sampling techniques, seasonal variability, or differences in contract laboratories.

9. Describe the ground-water quality, based on TWC results, utilizing Stiff diagrams, tri-linear plots, etc., to compare inorganic water quality between wells. Include the diagram(s) as Attachment X. Do the results indicate changes in ground-water quality downgradient of the WMA (yes/no)? NO. If yes, explain in comments.

Comments

The ground water quality in the monitored zone at the HL&P site can be described as a predominantly sodium-chloride type water. As part of a ground water assessment program conducted in 1984, HL&P sampled and analyzed water from the 4 monitor wells as well as surface water from the impoundments and the cooling water discharge canal. A map showing the sample locations is presented as

b Parameters sampled as part of a Ground Water Quality Assessment Plan Included as Attachment S

7 Overall, does the analysis program enable the reliable detection of, and for assessment purposes, the quantification of a release of hazardous constituents to ground-water from the monitored WMA (yes/no)? No, without appropriate QA/QC data included in the report and the large discrepancy observed between the TWC and HLP data for the MW-1 sample collected on 4-24-87, the analysis program is unreliable and therefore noncompliant.

8 Results of co-sampling events

a Results of Operator Sample Analysis - Attachment T

b Results of TWC Sample Analysis

1) COC Tags - Attachment U

2) Tabulated Inorganic Constituents - Attachment V

3) Tabulated Organic Constituents - Not sampled

c Do TWC results confirm operator results (yes/no)? NO
If not, describe apparent discrepancies between data sets and possible sources of error.

1 TWC values and APR values differ in some parameters by over 50 % For example, bicarbonate values for MW-1 are 254 mg/L for the TWC sample and 3256 mg/L for the HLP sample

A percent difference $\frac{(A - B)}{(A + B)/2} \times 100$ was calculated for each

of the cations and anions in the MW-1 sample

Parameter (mg/L)	TWC	HLP	% Diff
Calcium	559	716	25%
Magnesium	246	263	6%
Sodium	2139	2725	24%
Potassium	3	6	66%
Bicarbonate	254	3256	171%
Sulfate	568	350	47%
Chloride	4463	4173	6 7%

2 A percent error of less than 1 % was calculated for both the TWC and HLP MW-1 sample data. This seems peculiar considering the large difference in individual values between the TWC and HLP data sets (Attachment Z) It is likely that the data was incorrectly reported by the laboratory in order for the data to fall within an acceptable amount of error Furthermore, the TWC data appears to fall in the range of historical results

collected at MW-1 more closely falls within the previous observed concentrations for this well than the HL&P sample

10 Releases to ground water

- a Were hazardous constituents detected by TWC sample analysis (yes/no)? YES If yes, identify unit and constituents

An arsenic concentration of 0.040 mg/L was detected in MW-1 near the IPDWS maximum concentration level for arsenic (As=0.050 mg/L). A Chromium concentration of 0.076 mg/L in MW-1 exceeds the IPDWS maximum concentration level of 0.050 mg/L for chromium. A mercury concentration of 0.0011 mg/L was detected in MW-2 near the IPDWS maximum concentration level for mercury (0.002 mg/L).

The arsenic and chromium indicates a release has occurred either from a pond storing cooling tower blowdown or from a release of acidic wastes from which leaching of the soil beneath the impoundments has occurred. Both are difficult to prove based on the fact that historically low pH's have not been detected in any of the monitor wells. Soil sample results presented in the closure certification (9-2-86) possibly provide some evidence that leaching may have taken place. As shown on Attachment AA, the arsenic, barium, chromium, lead and selenium concentrations in the background samples were all higher than the values found in samples of the clay liner. This data possibly indicates that the metals were leached from the soils and carried into the ground water.

- b. Has the operator detected hazardous constituents in the ground water (yes/no)? NO If yes, identify unit and constituents.

Arsenic and chromium were not detected above the detection limits at the APR laboratory.

- c. Do the TWC sample results confirm operator results (yes/no)? If no, explain in comments.

NO The detection limit used by HL&P for chromium (0.100 mg/L) is above the IPDWS for chromium, hence it was not detected.

Mercury was not analyzed by the HLP contract lab.

- d. Do TWC sample results and/or operator results indicate non-hazardous constituents have been released from the WMA (yes/no)? NO If yes, explain in comments.

Attachment Y₁^{Row} A table presenting the data is shown in Attachment Y₂. From this data, one can observe the similarity between the analysis of sample MW-1 and the discharge canal sample SI-4, especially in the magnesium, chloride and conductivity concentrations. The conclusions of the assessment report stated that any seepage from the surface impoundments that might be detected in the monitor wells would be masked by the ground-water mound from the discharge canal. This conclusion, although somewhat oversimplified, points out the difficulty in detecting a release from a surface impoundment or delineating the source of that release from one of several impoundments. The range in water qualities from the monitor wells and the surface impoundments is shown on the 1984 Assessment Report trilinear and stiff diagrams (Attachment X₂)^{Row} and as summarized below. Attachment X₁ (Row)

- 1 The inorganic acid surface impoundment (SI-1) plots in the lower field of the diamond shaped domain of the trilinear diagram due to its high bicarbonate and high sodium concentrations
- 2 The demineralizer regenerant surface impoundment (SI-2) plots in the sodium-sulfate domain
- 3 Monitor wells 2, 3 and 4 plot close to the discharge canal sample (SI-4), the demineralizer regenerant pond (SI-2) and the sludge drying bed (SI-6) indicating the possible influences of the surface waters on the ground water.
4. Monitor wells 2, 3 and 4 appear to plot in the middle of an imaginary line connecting monitor well 1 and the inorganic acid surface impoundment 1 (SI-1) indicating a lesser degree of influence from the discharge canal (SI-4) and possible mixing with water quality from the inorganic acid surface impoundment

Mixing- In order to determine if the ground-water qualities in the monitor well samples represent mixing of ground water with surface water sources, a binary mixing model (HC-GRAM4) was used. The output from the computer program indicated that the data did not fit any binary mixing calculations. If mixing has occurred, it is more complicated than the simple binary mixing model can predict.

5. A release from anyone of the surface impoundments would be difficult to determine. For example, a release from the demineralizer regenerant impoundment might result in increases in sulfate but decreases in chloride and alkalinity in the monitor well samples. At this site, cations and anions would not serve as useful indicator parameters.

TWC CME data

TWC and HL&P samples collected during the CME were plotted on stiff and trilinear diagrams (Attachment Z) to illustrate variability between the two sources of laboratory data. The TWC sample

ANALYTICAL
PETROLEUM
RESEARCH

laboratories, Inc

HOUSTON LIGHTING AND POWER COMPANY
12301 FUFLAND
HOUSTON, TEXAS 77034
ATTENTION: MR RICHARD B/E

MAY 31, 1987

INVOICE NO 1027
CERTIFICATE #02104

=====

SUBMITTED BY	DOUG CHIN			
LOCATION	WEBSTER			
DATE OF SAMPLE	APRIL 14, 1987	DATE RECEIVED	APRIL 14, 1987	
DESCRIPTION	MW-1 A			

SAMPLE ANALYSIS =====	RESULTS IN MG/L =====	DATE =====	TIME =====	ANALYST =====
CALCIUM	716	05/24	0900	GT
MAGNESIUM	263	05/14	0800	GT
SODIUM	2725	05/18	0800	DD
POTASSIUM	6 0	05/14	1200	GT
BICARBONATE	3256 *	05/20	1630	DD
CARBONATE	1	05/20	1630	DD
CHLORIDE	4173	05/18	1100	TF
SULFATE	350	05/18	1300	JT
TOTAL DISSOLVED SOLIDS	11,546	04/23	0900	GT
MANGANESE	0.8	05/14	1000	DD
FLUORIDE	0 2	05/20	1600	TF
ARSENIC	0 02	05/11	1200	GT
BORON	1 45	05/14	1100	GT
CADMIUM	0.01	05/11	1100	GT
CHROMIUM	0 1	05/11	1200	GT
IRON	8 35	05/18	0800	DD

PAGE ONE OF TWO

Attachment Q

ANALYTICAL METHODS

All samples obtained for monitoring should be analyzed in accordance with approved EPA methods which are listed below.

<u>Parameter</u>	<u>Method</u>	<u>Reference</u>	<u>Description</u>
** Conductivity	120.1	1	Conductometric
** pH	150.1	1	Electrometric
* Chloride	325.3	1	Titrimetric
* Sulfate	375.4	1	Turbidimetric
* Iron	236.1	1	AA/Aspiration
* Manganese	243.1	1	AA/Aspiration
* Sodium	273.1	1	AA/Aspiration
* Phenol	420.1	1	Colorimetric
* Total Organic Carbon	415.1	1	Combustion/IR
* Total Organic Halogen	450.1	2	Combustion/HECD

1. EPA 600/4-79-020, March 1979, "Methods for Chemical Analysis of Water and Wastes".
2. EPA Interim Method, November, 1980, "Interim Method for Total Organic Halide".

Attachment P

Parameters	MW-1 UPGRADIENT		MW-2 DOWNGRADIENT	
	1984 Assessment	TWC-1987 CME	1984 Assessment	TWC-1987 CME
Calcium	560	559	59	69
Magnesium	270	246	34	42
Potassium	3.8	3	2.4	2
Sodium	1700	2139	300	419
Acidity	0	-	0	-
Alkalinity	190	208	374	492
Sulfate	450	568	160	248
Chloride	3900	4463	220	352
Fluoride	0.9	0.6	1.3	1.4
Nitrate	<0.05	0.03	<0.05	0.66
Silica	12	19.	2	21
Copper	0.28	0.064	<0.01	<0.02
Iron	0.25	74.6	<0.05	3.71
Zinc	1.6	0.150	0.05	<0.02
Conductivity	12 000.	17 000.	1600.	3190
Dissolved Solids	8700.	8123	990	1453
pH	7.24	7.02	7.93	7.10

Attachment S
Comparison of Results
of Assessment 1984 with
CME-TWC 1987 for MW1
and MW-2

TDWR Registration #31633

WEBSTER GENERATING STATION

Groundwater Parameters and their Concentrations Which Exceed the EPA
Interim Primary Drinking Water Standards

	<u>Parameter</u>	<u>Concentration</u>
<u>1st Quarter</u>		
Well 3	Gross Beta	25 \pm 3 pCi/l
	Coliform	150 1/100 ml
Well 4	Gross Beta	7 \pm 2 pCi/l
	Coliform	1700 1/100 ml
<u>2nd Quarter</u>		
Well 1	Barium	13 4 mg/l
Well 2	Barium	3 7 mg/l
Well 3	Barium	4 1 mg/l
Well 4	Barium	3 5 mg/l
<u>3rd Quarter</u>		
No parameters found to exceed drinking water standards		
<u>4th Quarter</u>		
Well 1	Mercury	003 mg/l
Well 4	Mercury	003 mg/l
	Coliform	8 1/100 ml

Attachment R

A
P
R

ANALYTICAL
PETROLEUM
RESEARCH

Laboratories, Inc

HOUSTON LIGHTING AND POWER COMPANY
12001 HUPLAND
HOUSTON, TEXAS 77034
ATTENTION MR RICHARD BYE

MAY 31, 1987

INVOICE NO 13272
CERTIFICATE #32134

=====

SUBMITTED BY:	DOUG CHIN			
LOCATION	WEBSTER			
DATE OF SAMPLE	APRIL 24, 1987	DATE RECEIVED	APRIL 24, 1987	
DESCRIPTION	MW-1 A			

SAMPLE ANALYSIS =====	RESULTS IN MG/L =====	DATE =====	TIME =====	ANALYST =====
CALCIUM	716	05/24	0900	GT
MAGNESIUM	263	05/14	0800	GT
SODIUM	2725	05/18	0800	DD
POTASSIUM	6.0	05/14	1200	GT
BICARBONATE	3256 *	05/20	1630	DD
CARBONATE	1	05/20	1630	DD
CHLORIDE	4173	05/18	1100	FI
SULFATE	350	05/18	1300	JP
TOTAL DISSOLVED SOLIDS	11,546	04/23	0900	GT
MANGANESE	0.8	05/14	1000	DD
FLUORIDE	0.2	05/20	1600	TP
ARSENIC	0.02	05/11	1200	GT
BOFON	1.45	05/14	1100	GT
CADMIUM	0.01	05/11	1100	GT
CHROMIUM	0.1	05/11	1200	GT
IRON	8.35	05/18	0800	DD

PAGE ONE OF TWO

The Light company

Houston Lighting & Power P O Box 1700 Houston Texas 77001 (713) 228 9211

June 29, 1987

Mr Robert Hahn
Texas Water Commission
Hazardous & Solid Waste Division
P O Box 13087
Capitol Station
Austin, Texas 78711


SUBJECT ANALYTICAL RESULTS OF SAMPLES FROM GROUNDWATER
MONITORING WELLS AT HL&P'S WEBSTER GENERATING
STATION TWC NO 31633

Dear Mr Hahn

Attached per your request are the results of the two samples we collected in duplicate with your samples on April 24, 1987 As discussed with you when you made your inspection visit, our compliance samples are analyzed by an outside contract commercial laboratory in this case, APR Laboratories

Should you have any additional questions, please contact Mr D B Chin at (713) 922-2203

Sincerely yours,



R W Lawhn, Manager
Environmental Assessment &
Waste Management
Environmental & Research Department

DBC/jcc L10

Attachments

Attachment T

A
P
R

ANALYTICAL
PETROLEUM
RESEARCH

Laboratories, Inc

HOUSTON LIGHTING AND POWER COMPANY
12301 FURLAND
HOUSTON, TEXAS 77034
ATTENTION MP RICHARD BYE

MAY 31, 1987

INVOICE NO 13177
CERTIFICATE #32105

=====

SUBMITTED BY	DOUG CHIN
LOCATION	WEBSTER
DATE OF SAMPLE	APRIL 24, 1987
DESCRIPTION	MW-2 A
DATE RECEIVED:	APRIL 24, 1987

SAMPLE ANALYSIS =====	RESULTS IN MG/L =====	DATE =====	TIME =====	ANALYST =====
CALCIUM	76.2	05/24	0900	GT
MAGNESIUM	42.1	05/14	0800	GT
SODIUM	306	05/18	0800	DD
POTASSIUM	3.4	05/14	1200	GT
BICARBONATE	450	05/20	1630	DD
CARBONATE	1	05/20	1630	DD
CHLORIDE	345	05/18	1100	TP
SULFATE	175	05/18	1300	JR
TOTAL DISSOLVED SOLIDS	1400	04/29	0900	GT
MANGANESE	<0.1	05/14	1000	GT
FLUORIDE	0.4	05/20	1600	TP
ARSENIC	<0.02	05/11	1200	GT
BORON	0.1	05/14	1100	GT
CADMIUM	0.01	05/11	1100	GT
CHROMIUM	<0.1	05/11	1200	GT
IRON	2.07	05/14	0800	DD

PAGE ONE OF TWO

PAGE TWO

CERTIFICATE NUMBER 02104

* THIS SAMPLE WAS FILTERED AND ACIDIFIED IN THE FIELD

QUALITY ASSURANCE. THESE ANALYSES ARE PERFORMED IN ACCORDANCE WITH EPA GUIDELINES FOR QUALITY ASSURANCE. THESE PROCEDURES INCLUDE THE FOLLOWING AS MINIMUM REQUIREMENTS. COMPARISONS AGAINST KNOWN STANDARDS IN EACH RUN, ONE IN TEN SAMPLE SPLITS, AND A QUARTERLY METHODS REVIEW AGAINST KNOWN SPIKE SAMPLES.

A P R LABORATORIES, INC.

Sammy Russo ^{gn}
Sammy Russo

SR/gf1

No **GW 03800**

APR 30 1987

TEXAS DEPARTMENT OF
P.O. Box 13087, Capitol Station
Austin, Texas 78711

Org No

Sample No

444

MW-2

Owner H L & P Address Houston Zip _____County Harris Well No MW-2Location Webster Power Sta. 31633

Date Drilled _____ Depth _____ Aquifer _____

Water Level _____ Sample After Pumping _____ Mins (Hrs) Yield _____ GPM Temperature _____ °F

Point of Collection well / bailer Appearance _____ Clear (Turbid) Red/silty ColorUse Monitor well Remarks _____ (Over)Date Collected 4-24-87 Time 11 50 A By Robert HahnSend copy of completed analysis to Robert W. Hahn TDWR Office No 1116A

TDWR 0778 (Rev 10 24 84)

No **GW 03800**

TEXAS DEPARTMENT OF WATER RESOURCES

Point of Collection

P O Box 13087, Capitol Station

Work No

Org No

Sample No

4003

444

MW-2

Lab Used TDH APR 27 '87 Lab _____ Method of Preservation ice / noneType of Facility Power Plant Date Completed 4-12-87 Analyst's Signature ML

	Mg/l	EPM		Mg/l	EPM	Other Ions	Mg/l
<input checked="" type="checkbox"/> Silica	21		<input checked="" type="checkbox"/> Carbonate	0	000	<input checked="" type="checkbox"/> Bromide	03
<input checked="" type="checkbox"/> Calcium	69	348	<input checked="" type="checkbox"/> Bicarbonate	600	984	<input checked="" type="checkbox"/> Iodide	59
<input checked="" type="checkbox"/> Magnesium	42	344	<input checked="" type="checkbox"/> Sulfate	248	512		
<input checked="" type="checkbox"/> Sodium	419	1822	<input checked="" type="checkbox"/> Chloride	352	992		
	Total	2514	<input checked="" type="checkbox"/> Fluoride	14	007		
<input checked="" type="checkbox"/> Potassium	2	005	<input checked="" type="checkbox"/> Nitrate-N	066	005		
<input checked="" type="checkbox"/> Boron	035	2519	pH	8.0	Total		
<input checked="" type="checkbox"/> Iron	see Heavy metals						
			Dissolved Solids (sum)	1453			
			Phenolphthalein Alkalinity as CaCO ₃				
			Total Alkalinity as CaCO ₃		1984	492	
			Total Hardness as CaCO ₃				
			Specific Conductance (Micromhos/CM)		1780		
			Diluted Conductance (Micromhos/CM)				

Remarks _____

☐ Items will be analyzed if checked total Iron requires separate sample

TL R-0778 R 10 24 84

Attachment U

No **GW 03801**TEXAS DEPARTMENT OF WATER RESOURCES
P O Box 13087, Capitol Station
Austin, Texas 78711Org No 444
Sample No MW-1

Owner HL&P Address Houston, TX Zip _____
 County Harris Well No MW-1
 Location Webster station #31633
 Date Drilled _____ Depth _____ Aquifer Beaumont FM
 Water Level _____ Sample After Pumping _____ Mins (Hrs) Yield _____ GPM Temperature _____ °F
 Point of Collection well MW-1 Appearance _____ Clear Turbid ^{Red sh} _{Silty} Color _____
 Use monitor Remarks _____ (Over) _____
 Date Collected 4-24-87 Time 10:00 AM By Robert Hahn
 Send copy of completed analysis to Robert Hahn TDWR Office No 1116A

TDWR 0778 (Rev 10-24-84)

No **GW 03801**

TEXAS DEPARTMENT OF WATER RESOURCES

P O Box 13087, Capitol Station

Work No 4003
Org No 444
Sample No MW-1

Point of Collection MW-1
 Lab Used TDH Method of Preservation none
 Type of Facility _____ Date Completed 4/23/87 Analyst's Signature ML

	Mg/l	EP 1		Mg/l	EPM	Other Ions	Mg/l
✓ Silica	<u>19</u>		✓ Carbonate	<u>0</u>	<u>0.00</u>	✗ Bromide	<u>31</u>
✓ Calcium	<u>559</u>	<u>2796</u>	✓ Bicarbonate	<u>254</u>	<u>416</u>	✗ Iodide	<u>12</u>
✓ Magnesium	<u>246</u>	<u>2022</u>	✓ Sulfate	<u>568</u>	<u>1183</u>		
✓ Sodium	<u>2139</u>	<u>9300</u>	✓ Chloride	<u>4463</u>	<u>12582</u>		
	Total	<u>14118</u>	✓ Fluoride	<u>06</u>	<u>003</u>		
✓ Potassium	<u>3</u>	<u>002</u>	✓ Nitrate N	<u>003</u>	<u>000</u>		
✓ Boron	<u>091</u>	<u>14126</u>	pH <u>7.6</u>	Total	<u>14685</u>		
✓ Iron	<u>see heavy metals</u>		✓ Dissolved Solids (sum)	<u>8123</u>			
Remarks _____			Phenolphthalein Alkalinity as CaCO ₃		<u>(416) 208</u>		
			Total Alkalinity as CaCO ₃		<u>6250</u>		
			Total Hardness as CaCO ₃				
			Specific Conductance (Micromhos CM)				
			Diluted Conductance (Micromhos CM)				

If the iron and manganese are not analyzed separately, use separate sample

T 10/78 H 10 454


Attachment U

PAGE TWO

CERTIFICATE NUMBER 32135

QUALITY ASSUPANCE: THESE ANALYSES ARE PERFORMED IN ACCORDANCE WITH EPA GUIDELINES FOR QUALITY ASSURANCE THESE PROCEDUFES INCLUDE THE FOLLOWING AS MINIMUM REQUIREMENTS: COMPARISONS AGAINST KNOWN STANDARDS IN EACH RUN, ONE IN TEN SAMPLE SPLITS, AND A QUARTERLY METHODS REVIEW AGAINST KNOWN SPIKE SAMPLES.

A P R LABORATORIES, INC.

A handwritten signature in cursive script, reading "Sammy Russo", with a small mark to the right.

Sammy Russo

SR/gf1

APR 30 1987

HM

11348

District

7

County

Harris

Basin

Charger Name

Time Collected

10 30 A

nt Name

Point of Collection

Equipment - Follow

Method of Flow Measurement

Bailer decon

PERMIT NUMBER	PAGE NO	DATE	Mo	Day	Yr	MAY STAMP				
							9	10	12	13
11633			04	24	87					

Chlorine Contact Time

Date Shipped

4-27-87

Collector's Signature

Robert W. Hester

21 CODE	26 PARAMETER VALUE	35 CODE	40 PARAMETER VALUE	49 CODE	54 PARAMETER VALUE	62
Flow (gpd)		Water Temperature (°F)		pH		
0 0 5 6		0 0 0 1 1		0 0 4 0 0		
O (mg/l)		Turbidity (JTU)				
0 5 0 0		0 0 0 7 0				

KAS DEPARTMENT OF WATER RESOURCES

HM

11348

District

7

Lab Used

CDH

Lab

EWZ 1414

Sample Heavy Metals

Material Sampled Raw Partially Treated

b Equipment BLANK Composite

Hr

Method of Preservation Nitric / ice

Observations

Type Facility Surf Imp

APR 27 87

Auxiliary Tags

Date Completed

Analyst's Signature

21 CODE	26 PARAMETER VALUE	35 CODE	40 PARAMETER VALUE	49 CODE	54 PARAMETER VALUE	62
Arsenic ✓		Barium ✓				
	< 1		< 10			
Cadmium ✓		Chromium ✓		Copper ✓		
	< 10		< 10		< 10	
Lead ✓		Manganese ✓		Mercury ✓		
	< 10		< 10		< 10	
Nickel ✓		Selenium		Silver		
	< 10					
Zinc ✓		Iron (Total) ✓				
	< 10		51			

Attachment U

1997 District _____ County Flams Basin _____
 Discharger Name 11347 H L & P Time Collected 4-24-87/10 00 AM
 Plant Name Webster Point of Collection monitor well
 Method of Flow Measurement _____ MW-1

PERMIT NUMBER	PAGE NO	DATE	Mo	Day	Yr	Chlorine Contact Time
311633	9101213	14151617181920	4	24	87	4-27-87
Collector's Signature <u>R. J. Hahn</u>						

21 CODE	26 PARAMETER VALUE	35 CODE	40 PARAMETER VALUE	49 CODE	54 PARAMETER VALUE 62
Flow (gpd)		Water Temperature (°F)		pH	
00058		00011		00400	
D.O. (mg/l)		Turbidity (JTU)			
00300		00070			

TEXAS DEPARTMENT OF WATER RESOURCES

to HM 11347 District 7 Lab Used TDP Lab No. EW7-1413
 Type Sample Heavy Metals HL & P 51633 Material Sampled Raw Partially Treated Fin
 Grab MW-1 Composite _____ Hr _____ Method of Preservation nitric
 Observations 9+ APR 27 87 Type Facility Sewt imp
 Date Completed _____ Auxiliary Tags _____
 Analyst's Signature _____

21 CODE	26 PARAMETER VALUE	35 CODE	40 PARAMETER VALUE	49 CODE	54 PARAMETER VALUE 62
Arsenic ✓		Barium ✓			
Cadmium ✓		Chromium ✓		Copper ✓	
Lead ✓		Manganese ✓		Mercury ✓	
Nickel					
Zinc ✓		Iron (Total)			

Attached to

Attachment V Tabulated TWC-CME Results

Parameter (mg/L)	MW-1	MW-2
Calcium	559	69
Magnesium	246	42
Potassium	3	2
Sodium	2139	419
Silica	19	21
Iron	0.91	0.35
Copper	74.6 ²	3.710 ²
Carbonate	0	0
Bicarbonate	254	600
Sulfate	568	248
Chloride	4463	352
Fluoride	0.6	1.4
Nitrate	0.03	0.66
Bromide	3.1	0.3
Iodide	1.2	5.9
Arsenic	0.040 ^{RWH}	0.025
Barium	0.052	0.071
Cadmium	<0.010	<0.010
Chromium	0.076' ^{RWH}	<0.020
Copper	0.064	<0.020
Lead	<0.050	<0.050
Manganese	0.850 ²	^{RWH} 0.043
Mercury	0.0004	0.0011
Nickel	0.060	<0.020
Zinc	0.150	<0.020

note

Exceeds IPDWS Maximum Concentration Level

Exceeds Secondary Drinking Water Standards

HM 11346 District 7 County Harris Basin
Charger Name HLP Time Collected 11 50 AM
nt Name Webster Point of Collection monitor well
ethod of Flow Measurement MW-2-

PERMIT NUMBER	PAGE NO	CARD TYPE	DATE			MAY STAMP	Chlorine Contact Time
			Mo	Day	Yr		
1633	9 10 12 13		14 15	16 17	18 19	20	Date Shipped 4-27-57
							Collector's Signature [Signature]
21 CODE	26 PARAMETER VALUE	35 CODE	40 PARAMETER VALUE	49 CODE	54 PARAMETER VALUE	62	
Flow (gpd)		Water Temperature (°F)		pH			
0 0 5 6		0 0 0 1 1		0 0 4 0 0			
O (mg/l)		Turbidity (JTU)					
0 3 0 0		0 0 0 7 0					

KANSAS DEPARTMENT OF WATER RESOURCES

HM 11346 District 7 Lab Used TDH Lab No EW7-1412
Sample Heavy Metals Material Sampled Raw Partially Treated Fir
b. HW-2 Composite Hr Method of Preservation ice / nitric
servations APR 27 '87 Type Facility SURT upc. ndmt
Date Completed
Analyst's Signature

21 CODE	26 PARAMETER VALUE	35 CODE	40 PARAMETER VALUE	49 CODE	54 PARAMETER VALUE	62
Arsenic ✓		Barium ✓				
	< 5		7 1			
Cadmium ✓		Chromium ✓		Copper ✓		
	< 1 0		< 2 0		< 2 0	
Lead ✓		Manganese ✓		Mercury ✓		
	< 3 1		4 2		1 1	
Nickel ✓		Selenium		Vanadium		
	< 3 0					
Zinc ✓		Iron (Total) ✓				
	< 3 0		2 7 1 0			

Attachment 4

1

Hw3

Parameter Units Sample Type	Ground Water Site Pt. Sample Comments	pH Standard G ab	Conductivity microhm cm 25°C	Total Dissolved Solids mg/L	Total Dissolved Solids mg/L	Chloride mg/L Grab	Iron mg/L G ab	Manganese mg/L G ab	Phenols mg/L Grab	Sodium mg/L G ab	Sulfate mg/L G ab
Done											
First Year (Initial) Background systematic mean		±	±	±	±						
052882	ND	7.36	2400	31	0.261	591	0.21	<0.05	<0.01	400	100
080582	17	7.16	2500	80	0.100	549	0.30	0.07	<0.01	290	230
092982	17	7.14	2600	85	0.048	514	1.10	0.18	<0.01	350	62
111982	16	7.76	2400	18	0.247	568	2.05	0.17	<0.01	240	50

1983	15	711	2437	27	0.07	750	1.47	0.05	<0.01	410	58
1984	37	72	3400	<10	<0.005	780	<0.05	0.01	0.005	380	65
1985	394	687	2955	0.7	<0.005	-	-	-	-	-	-
1986	394	688	2625	1.25	<0.005	340	2.0	<0.01	<0.005	208	42
1987	Not sampled										

MW4

Parameter Units Sample Type	Ground Water Env. Pa. Sample Container	pH Standard 0.5b	Conductivity µmhos cm ⁻¹ 0.5b	Total Organic Carbon mg/l 0.5b	Total Organic Nitrogen mg/l 0.5b	Chloride mg/l Grab	Iron mg/l Grab	Manganese mg/l Grab	Phenols mg/l Grab	Sodium mg/l Grab	Sulfate mg/l Grab
Date											
First Year (Initial) Background arithmetic mean		±	±	±	±						
052882	ND	7.51	2300	29	<0.005	345	< 0.05	<0.05	<0.01	410	220
080562	12	7.44	2500	112	0.106	505	< 0.05	0.36	<0.01	370	203
092982	13	7.37	2600	75	0.036	444	0.56	0.42	<0.01	450	200
111982	13	7.97	2500	21	0.061	492	1.90	0.42	<0.01	270	175

[illegible]

Attachment W Summary of Historical Results

NW1

Parameter Units Sample Type	Ground Water Dist. Pt. Sample Comments	pH Standard Grab	Conductivity micro mhos cm	Total Dissolved Solids mg/l Grab	Total Dissolved Solids mg/l Grab	Chloride mg/l Grab	Iron mg/l Grab	Manganese mg/l Grab	Phenols mg/l Grab	Sodium mg/l Grab	Sulfate mg/l Grab
Date											
First Year (initial) Background arithmetic mean		±	±	±	±						
052882	ND	7.13	9300	16	0.114	2760	0.39	0.15	< 0.01	1500	440
080582	6	7.13	9675	56	0.091	3430	0.05	0.21	< 0.01	1000	305
092982	7	7.03	12000	42	0.026	4094	1.00	0.17	< 0.01	2300	350
111982	7	7.25	13750	33	0.025	4931	1.45	0.11	< 0.01	1363	440

1983	5	7.3	9000	42	0.04	4290	2.35	0.15	< 0.01	1900	1170
1984	8.28	7.2	14,500	10	0.01	4,900	0.11	0.04	< 0.001	2,100	620
1985	9.48	6.9	15,925	14	< 0.005						512
1986	9.48	6.72 7.02	7,625 3863	13.0 5.5	0.009 < 0.005	3600	4.7	0.18	< 0.005	1015	160
1987 _{CME}						4173	8.33	0.8	-	2725	350
1987 _{TUE}	9.65	7.02	17,000	-	-	4463	74.6	0.85	-	2139	568

NW2

Parameter Units Sample Type	Ground Water Dist. Pt. Sample Comments	pH Standard Grab	Conductivity micro mhos cm	Total Dissolved Solids mg/l Grab	Total Dissolved Solids mg/l Grab	Chloride mg/l Grab	Iron mg/l Grab	Manganese mg/l Grab	Phenols mg/l Grab	Sodium mg/l Grab	Sulfate mg/l Grab
Date											
First Year (initial) Background arithmetic mean		±	±	±	±						
052882	ND	7.85	2600	19	0.176	522	0.3	0.11	< 0.01	1300	250
080582	10	7.58	2500	70	0.103	691	0.48	0.07	< 0.01	350	233
092982	11	7.47	3000	68	0.043	534	1.70	0.19	< 0.01	420	170
111982	11	7.87	2700	25	0.144	584	1.75	0.20	< 0.01	265	200

1983	9	7.61	1507	6	0.07	350	0.75	0.05	< 0.01	325	185
1984	7.41	7.4	2300	1	< 0.005	330	< 0.05	0.03	0.003	340	190
1985	9.11	7.27	1853	23	< 0.005	-	-	-	-	-	168
1986	8.11	7.07 7.8	3400 1375	< 1.0 7.0	< 0.005 < 0.005	254	3.1	0.06	0.02	123	150
1987 _{CME}						345	2.07	< 0.1	-	306	175
1987 _{TUE}	11.46	7.10	3190	-	-	352	3.71	0.043	-	419 ₂₅₈	248

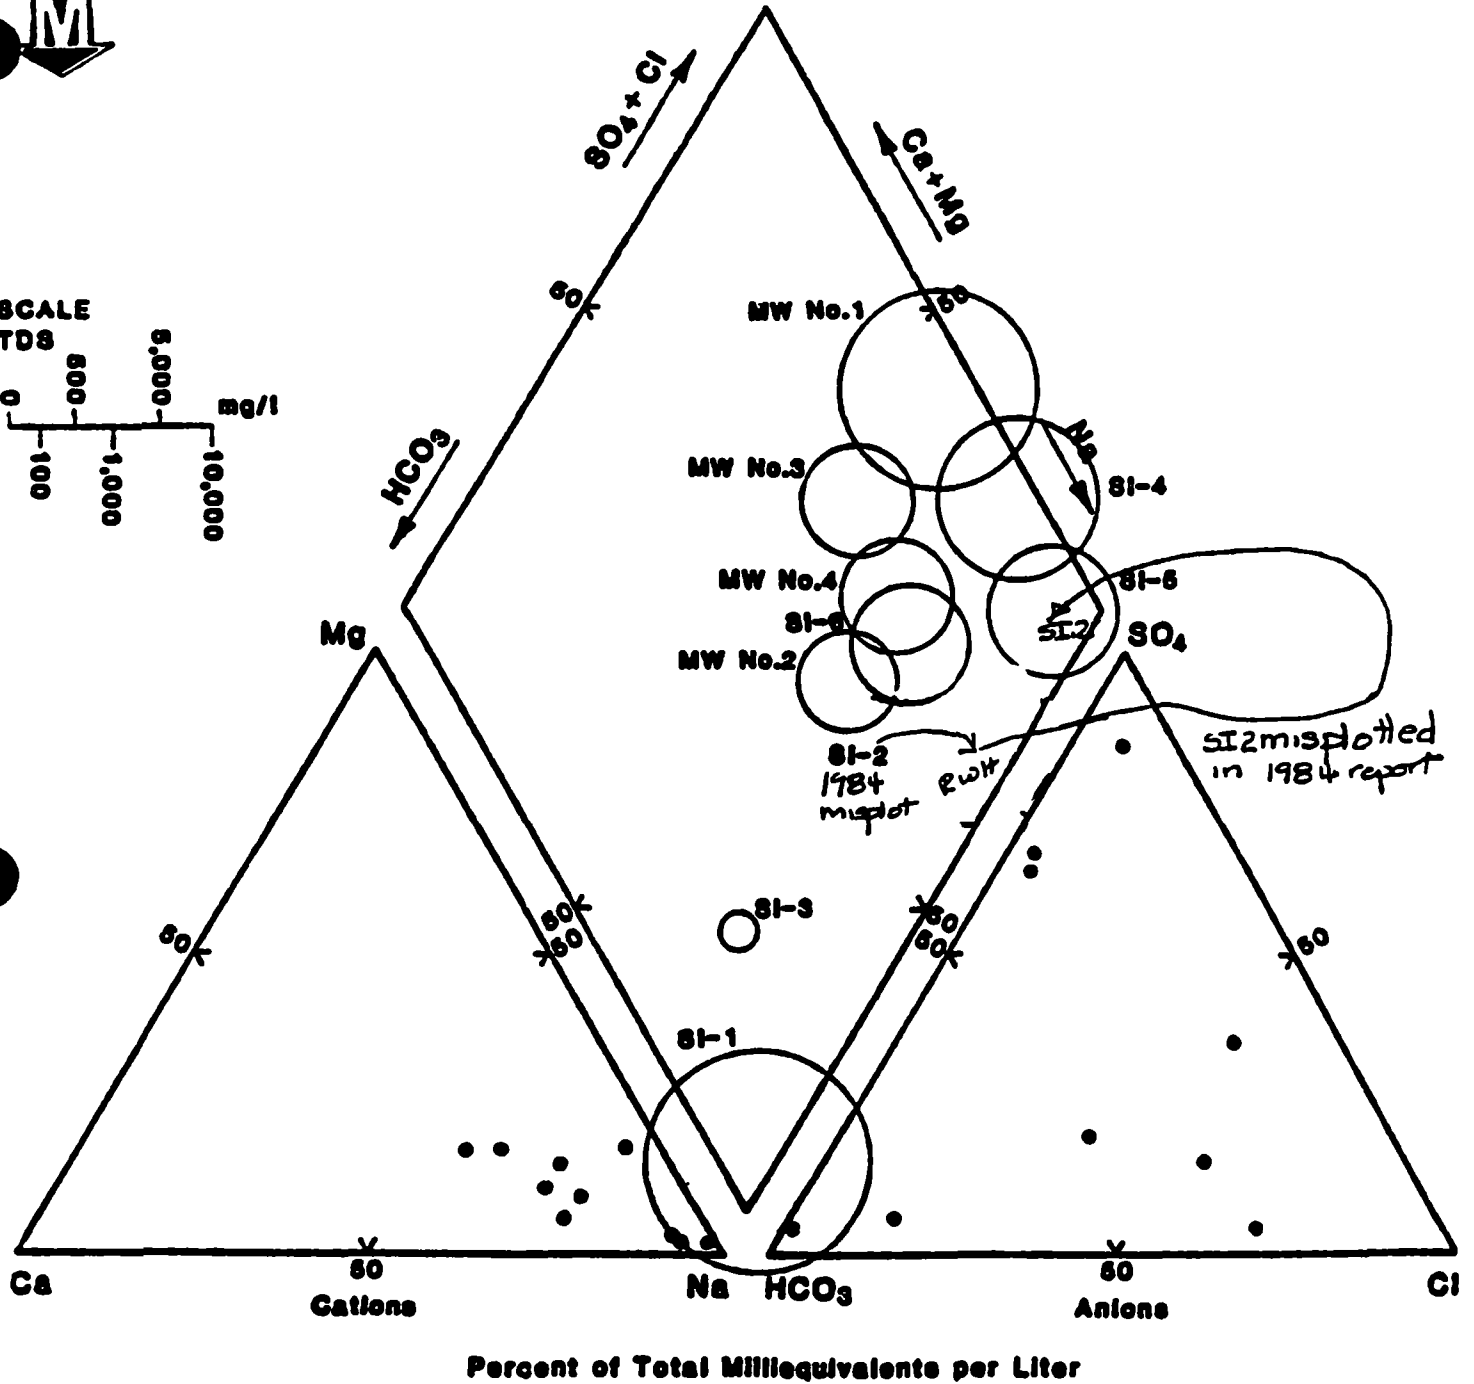



Figure 18. Piper Trilinear Diagram ,Webster Generating Station,
Monitor Wells and Surface Impoundments.

Attachments X_1, X_2
Attachments Y_1, Y_2

Tables and Diagrams
from HL&P Ground Water
Quality Assessment Report
May 1984

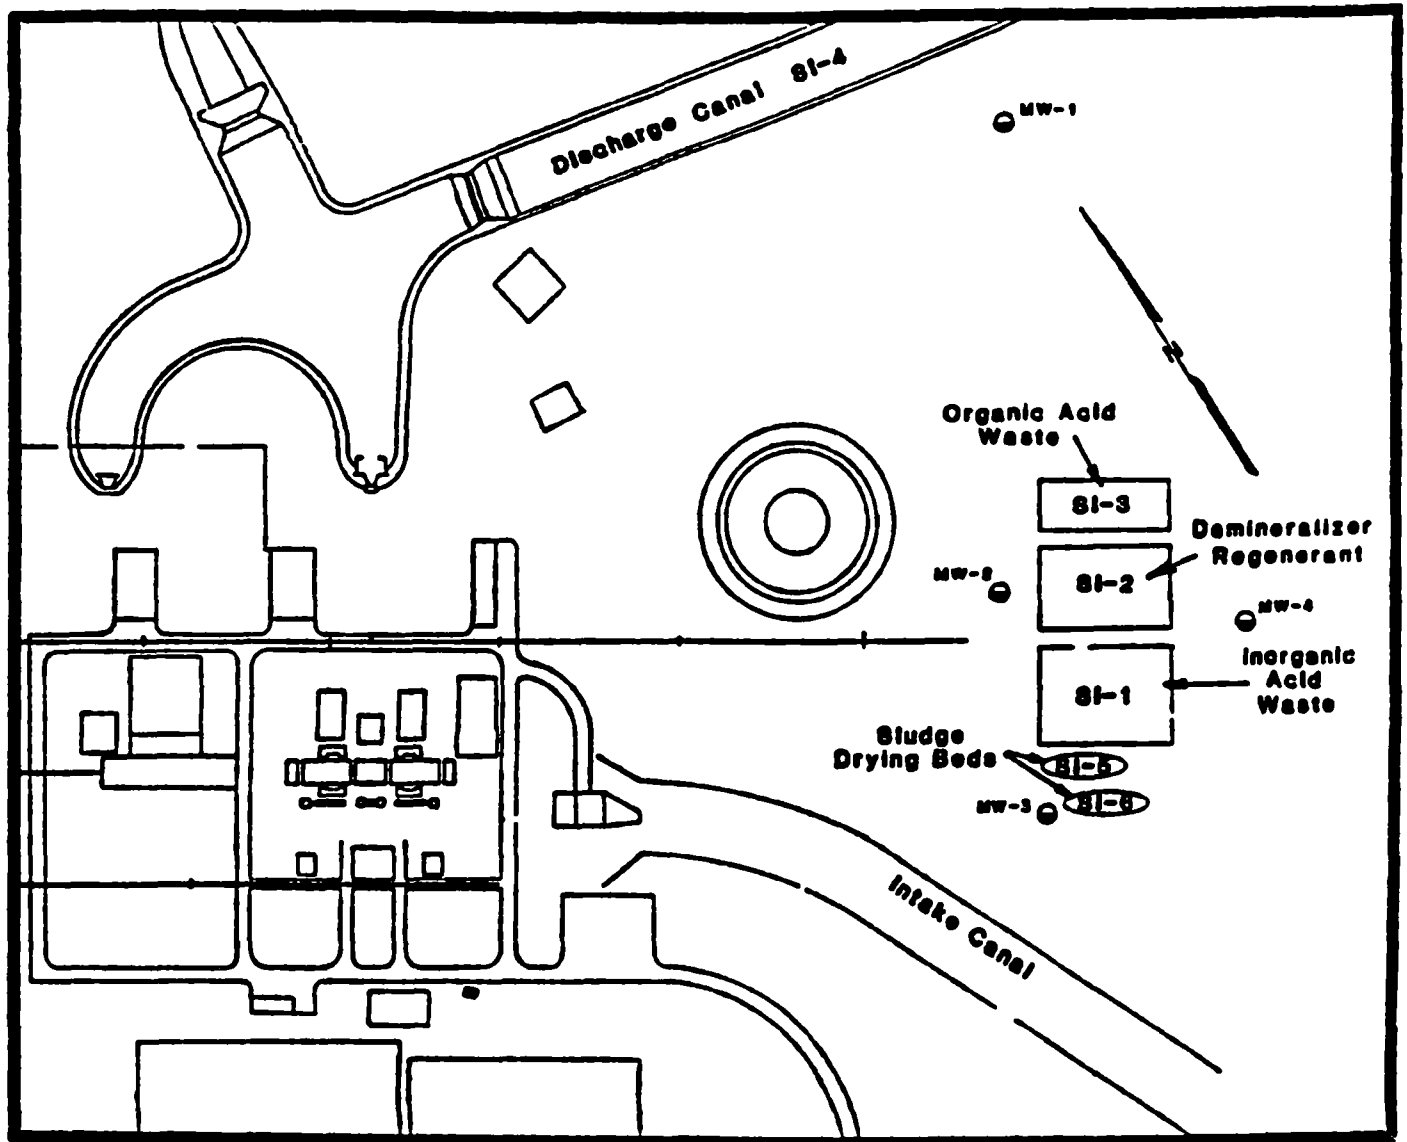


Figure 13 Location of Monitor Wells and Surface Impoundments,
Webster Generating Station

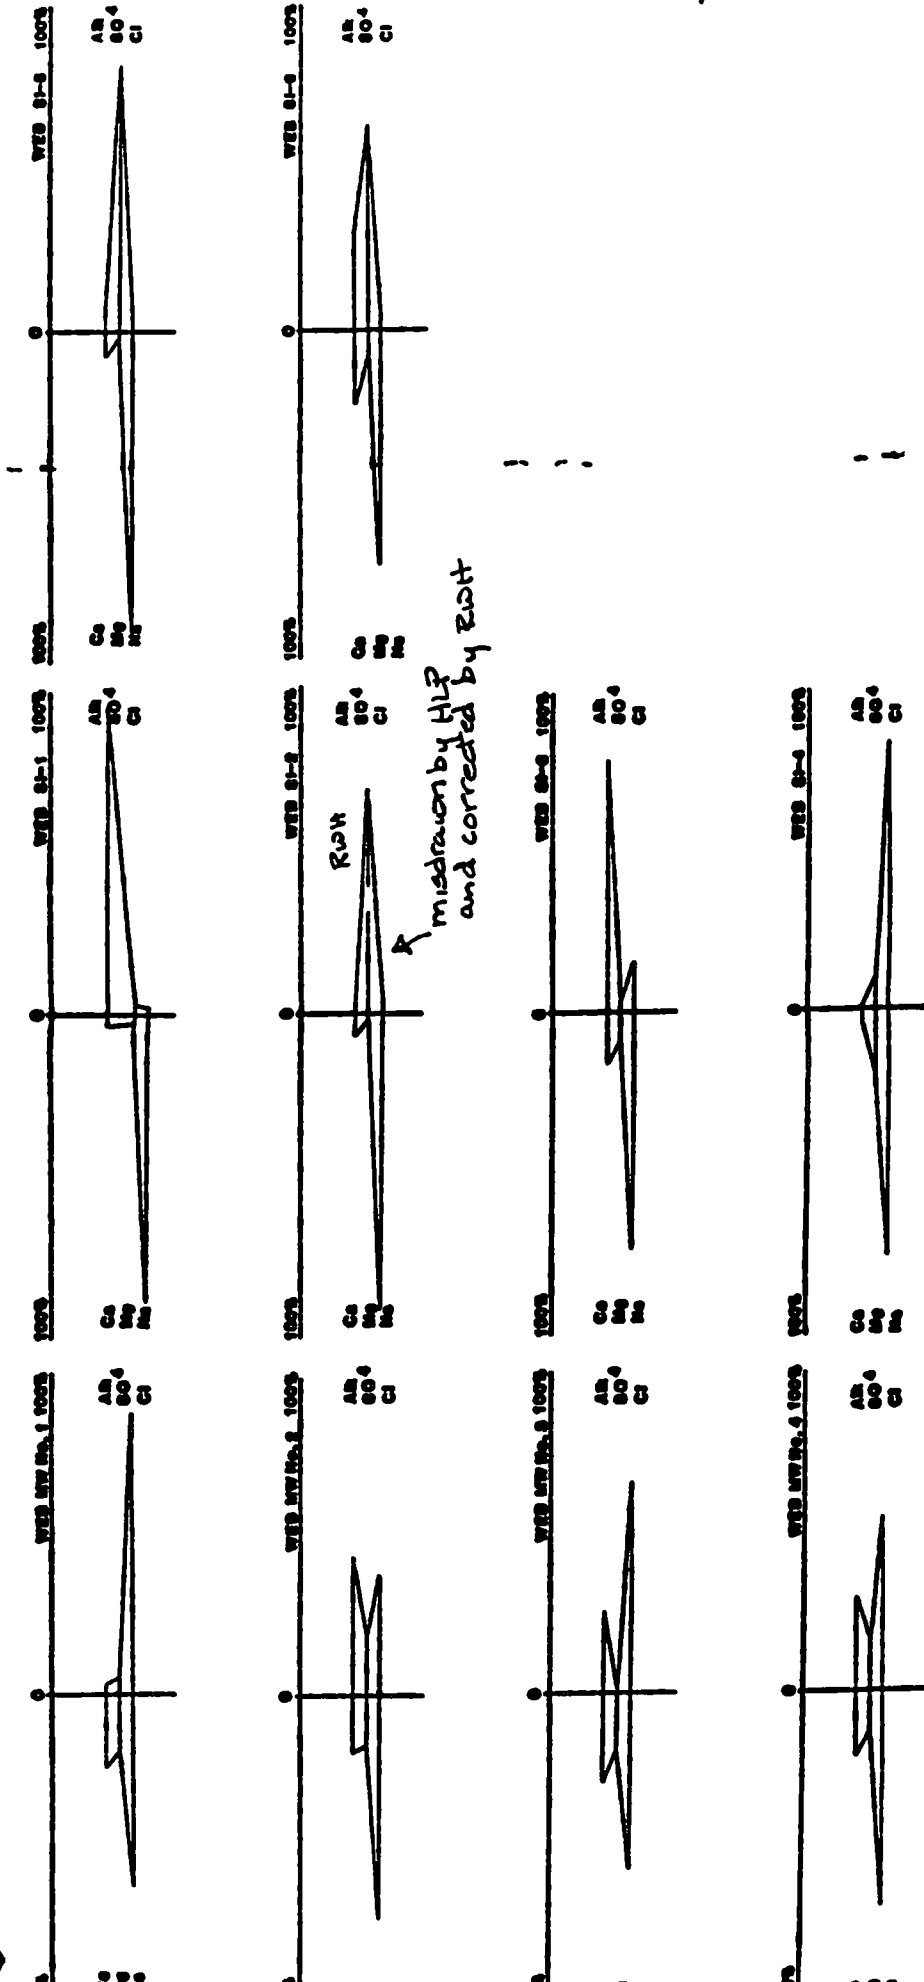


Figure 14. Modified Silt Diagrams Webber Generating Station Monitor Wells and Surface Impediments.

MC GRAM


Microchemical Analysis Methods

Version MC GRAM 1.04

04-Sep-1987

09 41:33 17

Project: hlp webster April 24, 1987

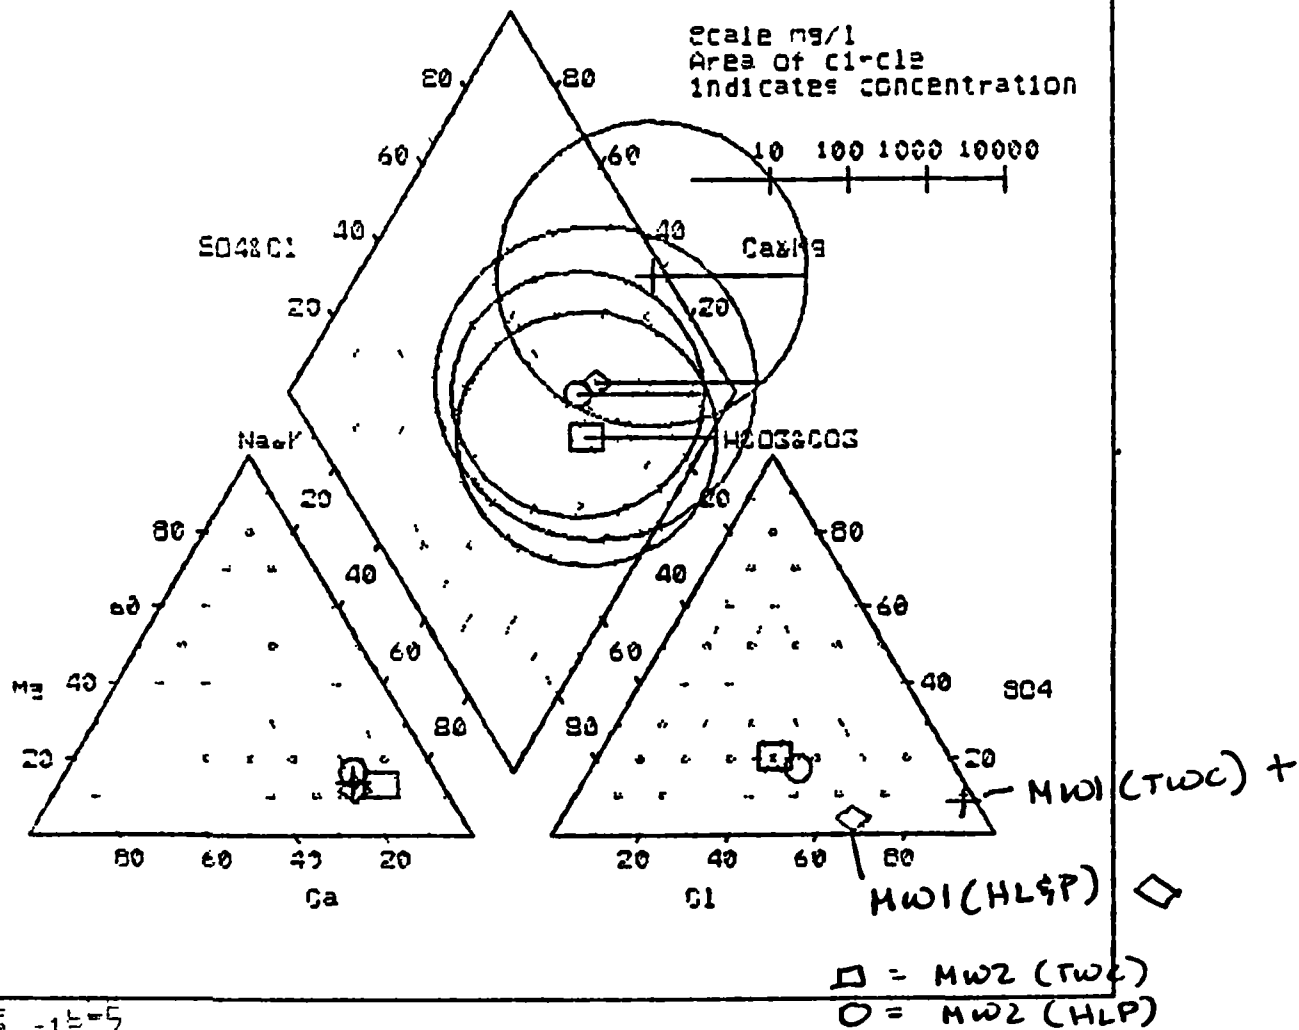

Chemical Constituents in ppm

Sample	Ca	Na	Cl	H2O	CO3
1	100	100	100	100	100
2	100	100	100	100	100
3	100	100	100	100	100
4	100	100	100	100	100
5	100	100	100	100	100
6	100	100	100	100	100
7	100	100	100	100	100
8	100	100	100	100	100
9	100	100	100	100	100
10	100	100	100	100	100
11	100	100	100	100	100
12	100	100	100	100	100
13	100	100	100	100	100
14	100	100	100	100	100
15	100	100	100	100	100
16	100	100	100	100	100
17	100	100	100	100	100
18	100	100	100	100	100
19	100	100	100	100	100
20	100	100	100	100	100
21	100	100	100	100	100
22	100	100	100	100	100
23	100	100	100	100	100
24	100	100	100	100	100
25	100	100	100	100	100
26	100	100	100	100	100
27	100	100	100	100	100
28	100	100	100	100	100
29	100	100	100	100	100
30	100	100	100	100	100
31	100	100	100	100	100
32	100	100	100	100	100
33	100	100	100	100	100
34	100	100	100	100	100
35	100	100	100	100	100
36	100	100	100	100	100
37	100	100	100	100	100
38	100	100	100	100	100
39	100	100	100	100	100
40	100	100	100	100	100
41	100	100	100	100	100
42	100	100	100	100	100
43	100	100	100	100	100
44	100	100	100	100	100
45	100	100	100	100	100
46	100	100	100	100	100
47	100	100	100	100	100
48	100	100	100	100	100
49	100	100	100	100	100
50	100	100	100	100	100

N.D. = not analyzed for

Attachment Z
Trilinear and Stiff Diagram


Table 2

**Clay Liner Samples
Demineralizer Regenerant Impoundment
Webster Generating Station**

Sample Point	EP Toxicity (mg/l)											Total Metals (mg/kg)							
	pH 0-2 inch	pH 6 inch	pH 18 inch	As	Ba	Cd	Cr	Pb	Hg	Ag	Se	As	Ba	Cd	Cr	Pb	Hg	Ag	Se
1	8.0	8.5		<0.002	<0.25	<0.05	0.1	<0.05	<0.002	<0.05	<0.002	2.93	105	<10	16	<10	<0.10	<10	0.042
2	8.6	8.7	8.7	<0.002	<0.25	<0.05	0.1	0.7	<0.002	<0.05	<0.002	4.15	180	<10	15	16	<0.10	<10	0.070
3	8.5	8.7																	
4	7.9	8.3		<0.002	<0.25	<0.05	0.2	<0.05	<0.002	<0.05	<0.002	3.70	228	<10	16	<10	<0.10	<10	0.069
5	8.2	7.7	8.3	0.007	<0.25	<0.05	<0.05	<0.05	<0.002	0.07	<0.002	3.84	203	<10	17	11	<0.10	<10	0.057
6	8.6	8.6																	
7	8.1	8.2																	
8	8.6	8.3	8.9	0.006	<0.25	<0.05	<0.05	<0.05	<0.002	0.2	<0.002	2.75	190	<10	13	<10	<0.10	<10	0.066
9	8.5	8.5																	
10	8.2	8.5																	
11	8.4	8.3	8.7	0.006	<0.25	<0.05	0.7	<0.05	<0.002	<0.05	<0.002	3.27	173	<10	12	13	<0.10	<10	0.059
12	8.1	8.2		0.002	<0.25	<0.05	<0.05	<0.05	<0.002	<0.05	<0.002	3.37	84	<10	12	<10	<0.10	<10	0.091
Sample Mean												3.43	166	<10	14	11	<0.10	<10	0.065
Background Samples ✓																			
1												10.9	356	<1	26	26	<0.2	<1	0.25
2												10.6	253	<1	21	16	<0.2	<1	<0.2
3												9.89	80.4	<1	20	20	<0.2	<1	0.31
Background Mean												10.5	230	<1	22	21	<0.2	<1	0.253

Percent Contribution to

100	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70	80	90	100
100	90	80	70	60	50	40	30	20	10	0	10	20	30	40	50	60	70	80	90	100

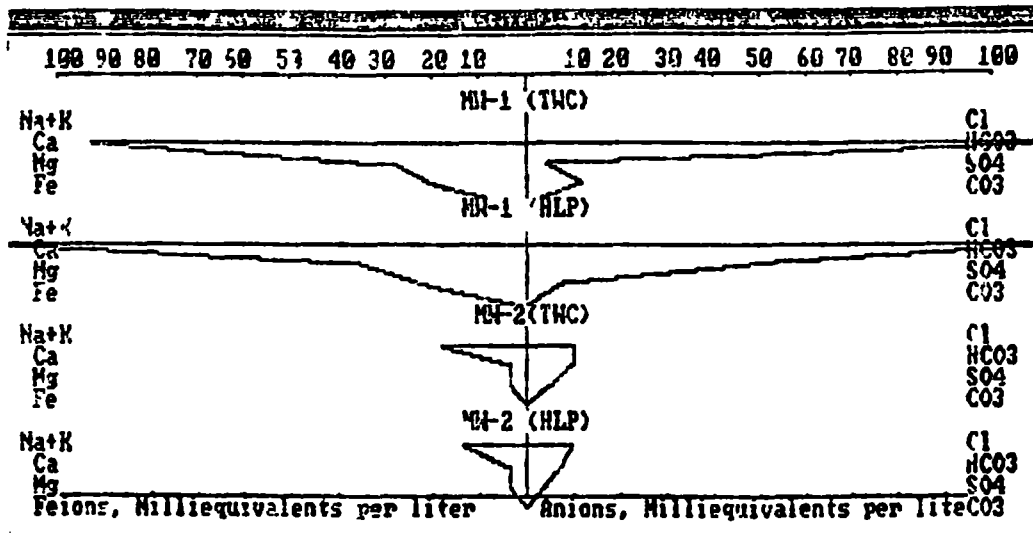

File
4-SEP-1987
9-50 30 01

Chemical Constituents in ppm

Sample	Ca	Mg	Na	Cl	HCO3	CO3
MW-1 (TWC)	559.00	246.00	2139.00	3.00	254.00	0.00
MW-1 (HLP)	716.00	263.00	2725.00	6.00	3256.00	0.00
MW-2 (TWC)	559.00	400.00	119.00	0.00	600.00	0.00
MW-2 (HLP)	76.20	42.10	306.00	3.40	450.00	0.00


Chemical Constituents in ppm

Sample	SO4	Cl	NO3	PO4	Si	Fe
MW-1 (TWC)	55.00	4463.00	0.00	0.00	19.00	74.60
MW-1 (HLP)	350.00	1170.00	0.00	0.00	0.00	74.60
MW-2 (TWC)	340.00	352.00	0.66	0.00	21.00	71.00
MW-2 (HLP)	175.00	345.00	0.00	0.00	0.00	0.00

Chemical Constituents in Equivalents per Million

Sample	Ca	Mg	Na	Cl	HCO3	CO3
MW-1 (TWC)	22.80	11.40	73.00	0.00	4.10	0.00
MW-1 (HLP)	27.40	11.40	118.00	0.10	5.10	0.00
MW-2 (TWC)	22.80	11.40	11.40	0.00	7.00	0.00
MW-2 (HLP)	3.10	1.70	12.60	0.00	7.00	0.00

ADD
2/22/87

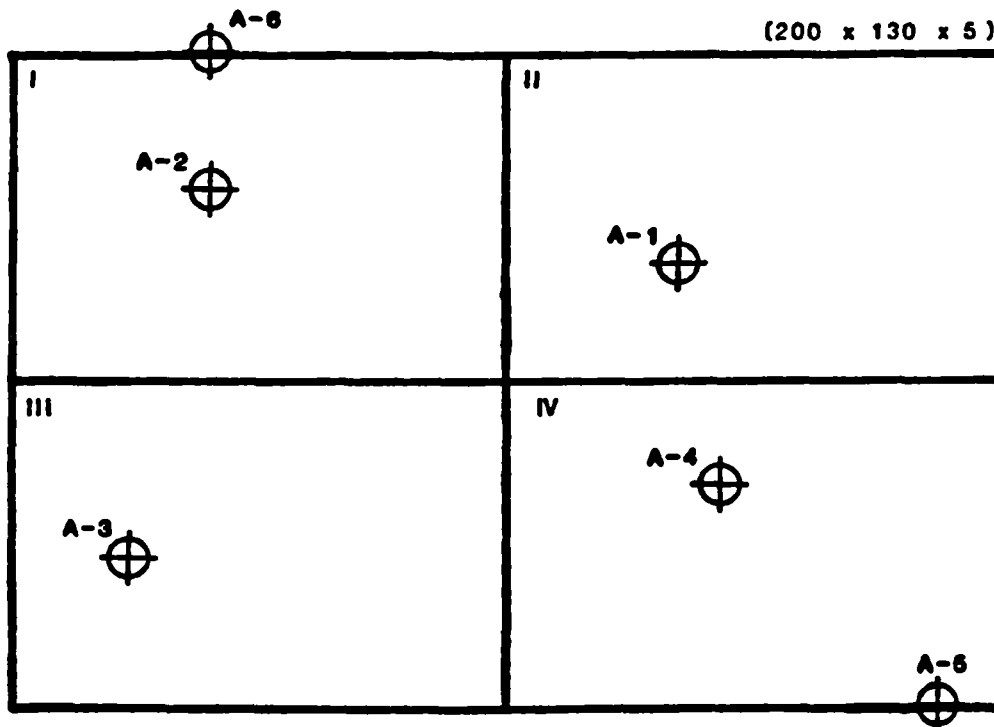

 BORING LOCATIONS



RESOURCE ENGINEERING INC.

ENVIRONMENTAL CONSULTANTS
HOUSTON, TEXAS


FIGURE 3
**DEMINERALIZER REGENERANT/
BOILER BLOWDOWN IMPOUNDMENT
CLAY LINER BORING LOCATIONS
WEBSTER GENERATING STATION**

DRAWN BY N L J

DATE 11-4-85


PROJECT NO 344 01

Attachment AA
Location Map

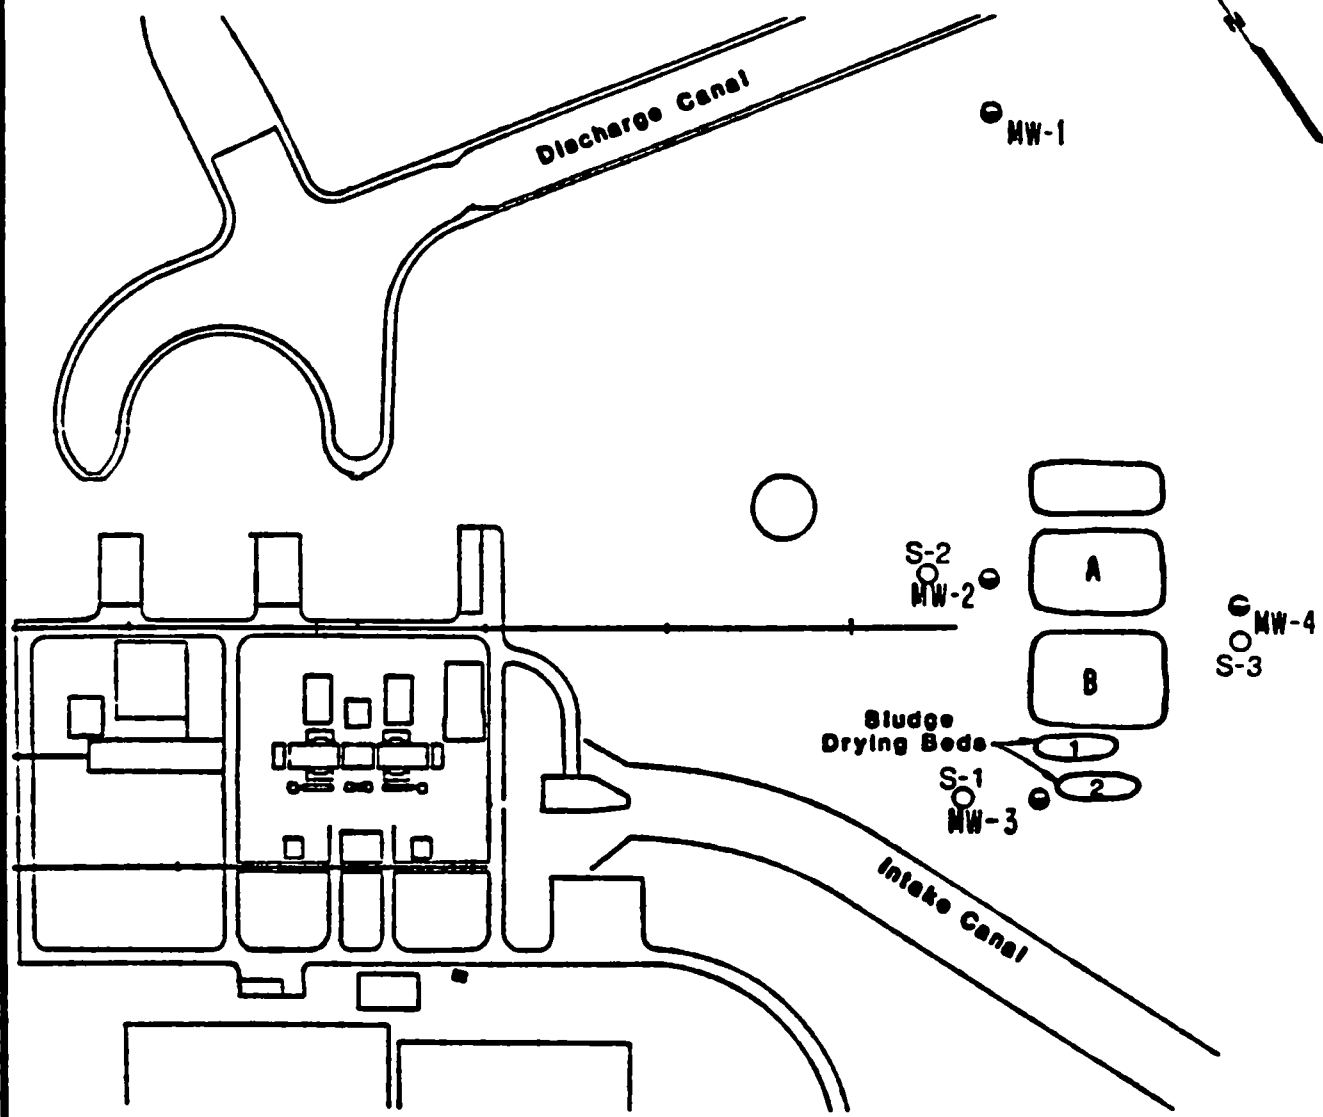

- LEGEND —
- MONITOR WELL
 - A DEMINERALIZER REGENERANT SURFACE IMPOUNDMENT
 - B INORGANIC METAL CLEANING SURFACE IMPOUNDMENT
 - SOIL SAMPLING LOCATIONS (Background)



	RESOURCE ENGINEERING INC ENVIRONMENTAL CONSULTANTS REGISTERED Firms
	FIGURE 2 FACILITY MAP WEBSTER GENERATING STATION

The Light company

Houston Lighting & Power P O Box 1700 Houston Texas 77001 (713) 228 9211

April 2, 1987

Mr Joe Korpics
Environmental Protection Agency
Region VI
1445 Ross Ave
Dallas, Texas 75202-2733

SUBJECT WEBSTER ELECTRIC GENERATING STATION
NPDES DISCHARGE PERMIT NO TX0006432

Attached please find a standard Form 2C renewal application for the Webster Electric Generating Station. The existing discharge permit for this facility will expire on October 3, 1987. Sampling data results required in support of this renewal will be transmitted at a later date.


HL&P requests one addition to the renewed permit. Consistent with EPA's practice with other once through cooling water power plants, the following acknowledgement should be added to Part III of the permit:

"The cooling water intake system is approved pursuant to the best technology requirements of Section 316(b) of the CWA"

The 316(b) Demonstration Document for this facility was submitted to EPA on January 27, 1981.

Should you have any questions with regard to this renewal, please do not hesitate to contact Kerry M Whelan at (713) 922-2200.

Sincerely,



W. F. McGuire, Manager
Environmental Protection Dept

RECEIVED
APR 14 1987
6vv-rs

KMW/pm/L9

cc Mr R A Newton (TWC)

Attachments